

PJ-009B

PJ-009B Information



Part Number	PJ-009B	
Manufacturer	CUI Inc.	
Category	Connectors, Interconnects Barrel - Power Connectors	
Description	CONN PWR JACK 2.5X5.5MM SOLDER	
Package	-	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com	
	E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



PJ-009B Specifications

Manufacturer Part NumberPI-009BManufacturerCUI Inc.CategoryConnectors, InterconnectsBartel - Power ConnectorsPackage-Series-Connector TypeJackGenderMaleIndustry Recognized Mating Diameter2.50mm ID (0.098"), 5.50mm OD (0.217")Actual Diameter0.098" (2.50mm ID), 0.260" (6.60mm OD)Number of Positions/ContactsSingle Switch, Normally ClosedMounting TypePanel MountMounting Feature-ShieldingUnshieldedFeatures-ShieldingUnshieldedFeatures-Instant Postion-Shielding Color-Shielding Color- <th></th> <th></th>		
Category Connectors, Interconnects Barrel - Power Connectors Package - Package - Series - Connector Type Jack Gender Male Industry Recognized Mating Diameter 2.50mm ID (0.098"), 5.50mm OD (0.217") Actual Diameter 0.098" (2.50mm ID), 0.260" (6.60mm OD) Number of Positions/Contacts 2 Conductors, 3 Contacts Internal Switch(s) Single Switch, Normally Closed Mounting Type Panel Mount Mounting Feature - Shielding Unshielded Shielding Sidler Eyelet(s) Shielding - Features - Insulation Color -	Manufacturer Part Number	PJ-009B
Barrel - Power ConnectorsPackage-Series-Connector TypeJackGenderMaleIndustry Recognized Mating Diameter2.50mm ID (0.098"), 5.50mm OD (0.217")Actual Diameter0.098" (2.50mm ID), 0.260" (6.60mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypePanel MountMounting FeatureSolder Eyelet(s)ShieldingUnshieldedFerminationSolder Eyelet(s)Shielding-Fatures-Insulation Color-Station Color-	Manufacturer	CUI Inc.
Package.Package.Series.Connector TypeJackGenderMaleIndustry Recognized Mating Diameter2.50mm ID (0.098"), 5.50mm OD (0.217")Actual Diameter0.098" (2.50mm ID), 0.260" (6.60mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypePanel MountMounting FeatureSolder Eyelet(s)ShieldingUnshieldedFeatures.Shielding.Features.Insulation Color.Shielding Color.<	Category	Connectors, Interconnects
Series-Connector TypeJackGenderMaleIndustry Recognized Mating Diameter2.50mm ID (0.098"), 5.50mm OD (0.217")Actual Diameter0.098" (2.50mm ID), 0.260" (6.60mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypePanel MountMounting Feature-TerminationSolder Eyelet(s)ShieldingUnshieldedFeatures-Insulation Color-Station Color-		Barrel - Power Connectors
Connector TypeJackGenderMaleIndustry Recognized Mating Diameter2.50mm ID (0.098"), 5.50mm OD (0.217")Actual Diameter0.098" (2.50mm ID), 0.260" (6.60mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting FeaturePanel MountShieldingSolder Eyelet(s)ShieldingUnshieldedFeatures-Insulation Color-Snale Solor-Shielding </td <td>Package</td> <td>-</td>	Package	-
GenderMaleIndustry Recognized Mating Diameter2.50mm ID (0.098"), 5.50mm OD (0.217")Actual Diameter0.098" (2.50mm ID), 0.260" (6.60mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypePanel MountMounting Feature5 Older Eyelet(s)ShieldingUnshieldedFeatures-Insulation Color-Insulation Col	Series	-
Industry Recognized Mating Diameter2.50mm ID (0.098"), 5.50mm OD (0.217")Actual Diameter0.098" (2.50mm ID), 0.260" (6.60mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypePanel MountMounting Feature-TerminationSolder Eyelet(s)ShieldingUnshieldedFeatures-Insulation Color-State Server-State Server	Connector Type	Jack
Actual Diameter0.098" (2.50mm ID), 0.260" (6.60mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypePanel MountMounting Feature-TerminationSolder Eyelet(s)ShieldingUnshieldedFeatures-Insulation Color-	Gender	Male
Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypePanel MountMounting Feature-TerminationSolder Eyelet(s)Shielding-Features-Insulation Color-	Industry Recognized Mating Diameter	2.50mm ID (0.098"), 5.50mm OD (0.217")
Internal Switch(s)Single Switch, Normally ClosedMounting TypePanel MountMounting Features-TerminationSolder Eyelet(s)ShieldingUnshieldedFeatures-Insulation Color-	Actual Diameter	0.098" (2.50mm ID), 0.260" (6.60mm OD)
Mounting TypePanel MountMounting Feature-TerminationSolder Eyelet(s)ShieldingUnshieldedFeatures-Insulation Color-	Number of Positions/Contacts	2 Conductors, 3 Contacts
Mounting Feature-TerminationSolder Eyelet(s)ShieldingUnshieldedFeatures-Insulation Color-	Internal Switch(s)	Single Switch, Normally Closed
TerminationSolder Eyelet(s)ShieldingUnshieldedFeatures-Insulation Color-	Mounting Type	Panel Mount
Shielding Unshielded Features - Insulation Color -	Mounting Feature	-
Features - Insulation Color -	Termination	Solder Eyelet(s)
Insulation Color -	Shielding	Unshielded
	Features	-
	Insulation Color	-
Voltage - Rated 24VDC	Voltage - Rated	24VDC
Current Rating 2.5A	Current Rating	2.5A
Report errors?		Report errors?

PJ-009B Guarantees

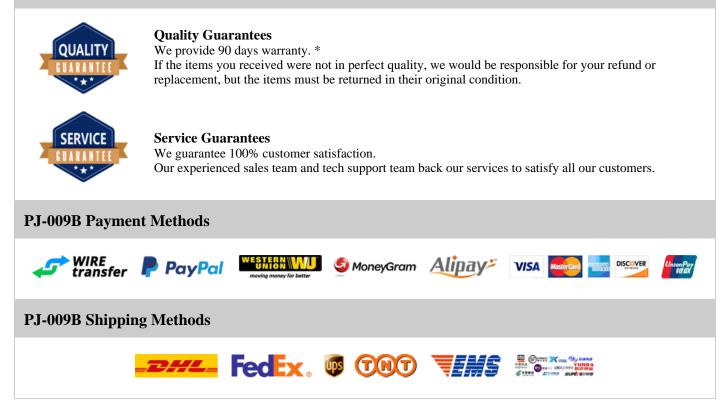

If you have any question about PJ-009B, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com