


PJ-028B

PJ-028B Information

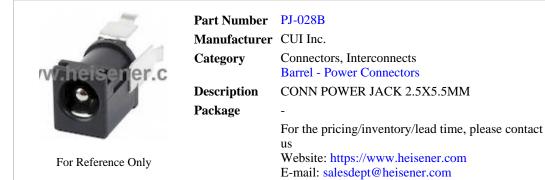

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.




Request a Quote

PJ-028B Specifications

Manufacturer Part Number PJ-028B Manufacturer CUI Inc. Category Connectors, Interconnects Barrel - Power Connectors Barrel - Power Connectors Package - Series - Connector Type Jack Gender Male Industry Recognized Mating Diameter 0.987 (2.50mm ID), 0.256" (6.50mm OD) Actual Diameter 2.50mm ID), 0.256" (6.50mm OD) Number of Positions/Contacts 2 Conductors, 3 Contacts Mounting Type Through Hole Mounting Feature - Shielding Unshielded Shielding Unshielded Shielding Unshielded Features - Shielding Single Shielding Features - Shielding Unshielded Features - Features - Shielding Single Shielding Features - Shielding - Features - Shielding			
CategoryConnectors, Interconnects Barrel - Power ConnectorsPackage-Package-Series-Connector TypeJackGenderMaleIndustry Recognized Mating Diameter2.50mm ID (0.098"), 5.50mm OD (0.217")Actual Diameter0.098" (2.50mm ID), 0.256" (6.50mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypeThrough HoleShielding-ShieldingUnshieldedShielding-Shielding-Features-Insulation Color-Voltage-Rated-Voltage-Rated-Current Rating24VDCCurrent Rating5.50mm Contexts	Manufacturer Part Number	PJ-028B	
Barrel - Power ConnectorsPackage-Series-Connector TypeJackGenderMaleIndustry Recognized Mating Diameter2.50mm ID (0.098"), 5.50mm OD (0.217")Actual Diameter0.098" (2.50mm ID), 0.256" (6.50mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypeThrough HoleMounting Feature-ShieldingUnshieldedFerminationKinked PinShielding-Foatures-Insulation Color-Voltage - Rated24VDCCurrent Rating5.50	Manufacturer	CUI Inc.	
Package.Series.Connector TypeJackGenderMaleIndustry Recognized Mating Diameter2.50mm ID (0.098"), 5.50mm OD (0.217")Actual Diameter0.098" (2.50mm ID), 0.256" (6.50mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting Fature-Nouting Feature.ShieldingUnshieldedFertures.Shielding Closer.Fatures.Nutation Color.Voltage - Rated.Current Rating.Stated	Category	Connectors, Interconnects	
Series-Connector TypeJackGenderMaleIndustry Recognized Mating Diameter2.50mm ID (0.098"), 5.50mm OD (0.217")Actual Diameter0.098" (2.50mm ID), 0.256" (6.50mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting Type-Yourning Feature-ShieldingUnshieldedShielding-Shielding-Features-Insulation Color-Yoltage - Rated24VDCCurrent Rating2.5A		Barrel - Power Connectors	
Connector TypeJackGenderMaleIndustry Recognized Mating Diameter2.50mm ID (0.098"), 5.50mm OD (0.217")Actual Diameter0.098" (2.50mm ID), 0.256" (6.50mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting Type-Mounting Feature-ShieldingUnshieldedShielding-Features-Insulation Color-Yoltage - Rated24VDCCurrent Rating5.5A	Package	-	
GenderMaleIndustry Recognized Mating Diameter2.50mm ID (0.098"), 5.50mm OD (0.217")Actual Diameter0.098" (2.50mm ID), 0.256" (6.50mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)2 Conductors, 3 ContactsMounting TypeThrough HoleMounting Feature-ShieldingKinked PinShielding-Features-Insulation Color-Voltage - Rated24VDCCurrent Rating2.5A	Series	-	
Industry Recognized Mating Diameter2.50mm ID (0.098"), 5.50mm OD (0.217")Actual Diameter0.098" (2.50mm ID), 0.256" (6.50mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypeThrough HoleMounting Feature-ShieldingKinked PinShieldingUnshieldedFeatures-Insulation Color-Voltage - Rated24VDCKurent Rating2.5A	Connector Type	Jack	
Actual Diameter0.098" (2.50mm ID), 0.256" (6.50mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypeThrough HoleMounting Feature-TerminationKinked PinShieldingUnshieldedFeatures-Insulation Color-Voltage - Rated24VDCCurrent Rating2.5A	Gender	Male	
Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypeThrough HoleMounting Feature-TerminationKinked PinShieldingUnshieldedFeatures-Insulation Color-Voltage - Rated24VDCCurrent Rating2.5A	Industry Recognized Mating Diameter	2.50mm ID (0.098"), 5.50mm OD (0.217")	
Internal Switch(s)Single Switch, Normally ClosedMounting TypeThrough HoleMounting Feature-TerminationKinked PinShieldingUnshieldedFeatures-Insulation Color-Voltage - Rated24VDCCurrent Rating2.5A	Actual Diameter	0.098" (2.50mm ID), 0.256" (6.50mm OD)	
Mounting TypeThrough HoleMounting Feature-TerminationKinked PinShieldingUnshieldedFeatures-Insulation Color-Voltage - Rated24VDCCurrent Rating2.5A	Number of Positions/Contacts	2 Conductors, 3 Contacts	
Mounting Feature-TerminationKinked PinShieldingUnshieldedFeatures-Insulation Color-Voltage - Rated24VDCCurrent Rating2.5A	Internal Switch(s)	Single Switch, Normally Closed	
TerminationKinked PinShieldingUnshieldedFeatures-Insulation Color-Voltage - Rated24VDCCurrent Rating2.5A	Mounting Type	Through Hole	
ShieldingUnshieldedFeatures-Insulation Color-Voltage - Rated24VDCCurrent Rating2.5A	Mounting Feature	-	
Features-Insulation Color-Voltage - Rated24VDCCurrent Rating2.5A	Termination	Kinked Pin	
Insulation Color-Voltage - Rated24VDCCurrent Rating2.5A	Shielding	Unshielded	
Voltage - Rated24VDCCurrent Rating2.5A	Features	-	
Current Rating 2.5A	Insulation Color	-	
-	Voltage - Rated	24VDC	
Report errors?	Current Rating	2.5A	
*		Report error	rs?

PJ-028B Guarantees

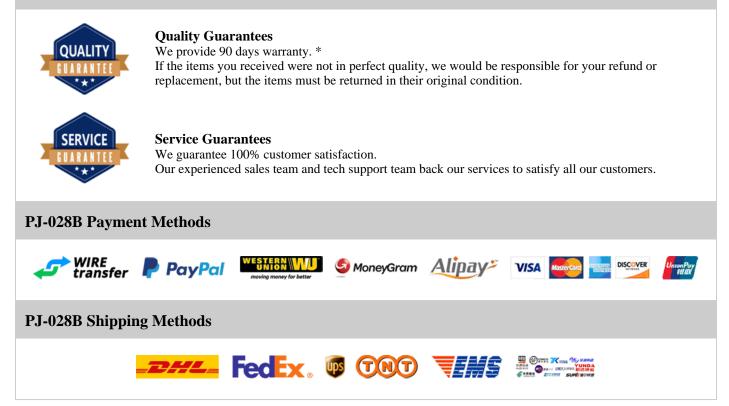

If you have any question about PJ-028B, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com