

PJ-057A

PJ-057A Information



Part Number	PJ-057A	
Manufacturer	CUI Inc.	
Category	Connectors, Interconnects Barrel - Power Connectors	
Description	CONN PWR JACK 2X5.5MM SOLDER	
Package	-	
For the pricing/inventory/lead time, please contac		
	us	
	Website: https://www.heisener.com	
	E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



PJ-057A Specifications

Manufacturer Part NumberPJ-057AManufacturerCUI Inc.CategoryConnectors, InterconnectsBarrel - Power ConnectorsBarrel - Power ConnectorsPackage-Series-Connector TypeJackGenderMaleIndustry Recognized Mating Diameter2.00mm ID (0.079"), 5.50mm OD (0.217")Actual Diameter0.078" (2.00mm ID), 0.248" (6.30mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting Type-		
CategoryConnectors, InterconnectsBarrel - Power ConnectorsPackage-Series-Connector TypeJackGenderMaleIndustry Recognized Mating Diameter2.00mm ID (0.079"), 5.50mm OD (0.217")Actual Diameter0.078" (2.00mm ID), 0.248" (6.30mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypeThrough Hole, Right Angle	Manufacturer Part Number	PJ-057A
Package-Series-Connector TypeJackGenderMaleIndustry Recognized Mating Diameter2.00mm ID (0.079"), 5.50mm OD (0.217")Actual Diameter0.078" (2.00mm ID), 0.248" (6.30mm OD)Number of Positions/ContactsSingle Switch, Normally ClosedInternal Switch(s)Through Hole, Right Angle	Manufacturer	CUI Inc.
Package-Series-Connector TypeJackGenderMaleIndustry Recognized Mating Diameter2.00mm ID (0.079"), 5.50mm OD (0.217")Actual Diameter0.078" (2.00mm ID), 0.248" (6.30mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypeThrough Hole, Right Angle	Category	Connectors, Interconnects
Series-Connector TypeJackGenderMaleIndustry Recognized Mating Diameter2.00mm ID (0.079"), 5.50mm OD (0.217")Actual Diameter0.078" (2.00mm ID), 0.248" (6.30mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypeThrough Hole, Right Angle		Barrel - Power Connectors
Connector TypeJackGenderMaleIndustry Recognized Mating Diameter2.00mm ID (0.079"), 5.50mm OD (0.217")Actual Diameter0.078" (2.00mm ID), 0.248" (6.30mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypeThrough Hole, Right Angle	Package	-
GenderMaleIndustry Recognized Mating Diameter2.00mm ID (0.079"), 5.50mm OD (0.217")Actual Diameter0.078" (2.00mm ID), 0.248" (6.30mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypeThrough Hole, Right Angle	Series	-
Industry Recognized Mating Diameter2.00mm ID (0.079"), 5.50mm OD (0.217")Actual Diameter0.078" (2.00mm ID), 0.248" (6.30mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypeThrough Hole, Right Angle	Connector Type	Jack
Actual Diameter0.078" (2.00mm ID), 0.248" (6.30mm OD)Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypeThrough Hole, Right Angle	Gender	Male
Number of Positions/Contacts2 Conductors, 3 ContactsInternal Switch(s)Single Switch, Normally ClosedMounting TypeThrough Hole, Right Angle	Industry Recognized Mating Diameter	2.00mm ID (0.079"), 5.50mm OD (0.217")
Internal Switch(s)Single Switch, Normally ClosedMounting TypeThrough Hole, Right Angle	Actual Diameter	0.078" (2.00mm ID), 0.248" (6.30mm OD)
Mounting Type Through Hole, Right Angle	Number of Positions/Contacts	2 Conductors, 3 Contacts
	Internal Switch(s)	Single Switch, Normally Closed
Mounting Feature -	Mounting Type	Through Hole, Right Angle
	Mounting Feature	-
Termination Solder	Termination	Solder
Shielding Unshielded	Shielding	Unshielded
Features Board Guide	Features	Board Guide
Insulation Color -	Insulation Color	-
Voltage - Rated 24VDC	Voltage - Rated	24VDC
Current Rating 2.5A	Current Rating	2.5A
Report errors		Report errors?

PJ-057A Guarantees

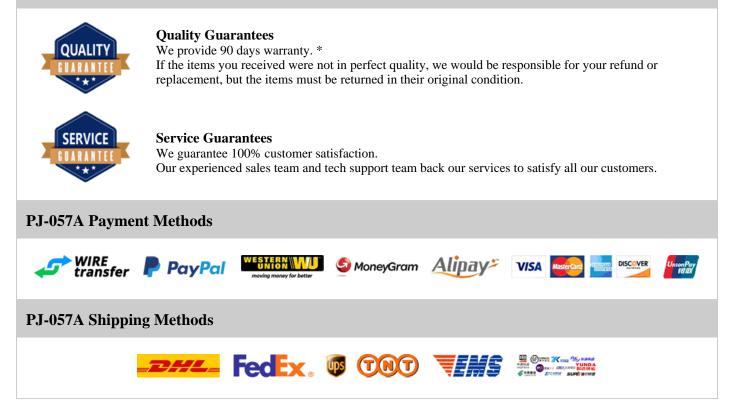

If you have any question about PJ-057A, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com