


PLC3G821A04

PLC3G821A04 Information

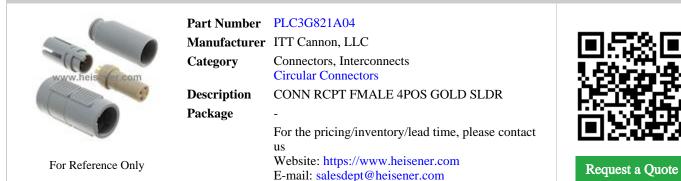

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



PLC3G821A04 Specifications

Manufacturer Part Number PLC3G821A04 Manufacturer ITT Cannon, LLC Category Connectors, Interconnects Category Circular Connectors Package - Series PL Connector Type Receptacle, Female Sockets Number of Positions 4 Shell Size - Insert - Mounting Type - Mounting Type Free Hanging (In-Line) Solder Cup Solder Cup Fastening Type Latch Lock, Push-Pull Orientation A Numerial, Finish Polysulfone (PSU) Contact Finish Solder Cup Voltage - Rated Strain Relief Nut Voltage - Rated Strain Relief Nut		
CategoryConnectors, InterconnectsPackage-Package-SeriesPLConnector TypeReceptacle, Female SocketsNumber of Positions4Shell Size - Insert-Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupOrientationAIngress ProtectionISO - Dust ProtectedShell Material, FinishGoldContact FinishGoldFaturesStrain Relief NutVoltage - RatedStrain Relief NutVoltage - RatedStrain Relief NutStrain Relief Nut <td>Manufacturer Part Number</td> <td>PLC3G821A04</td>	Manufacturer Part Number	PLC3G821A04
Circular ConnectorsPackage-SeriesPLConnector TypeReceptacle, Female SocketsNumber of Positions4Shell Size - Insert-Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch Lock, Push-PullOrientationAShell Material, FinishPolysulfone (PSU)Contact FinishGoldFaturesStrain Relief NutVoltage - Rated-Current Rating8A	Manufacturer	ITT Cannon, LLC
Package-SeriesPLConnector TypeReceptacle, Female SocketsNumber of Positions4Shell Size - Insert-Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch Lock, Push-PullOrientationMoutone PositionsShell Material, FinishPolysulfone (PSU)Shell Material, FinishGoldFotaturesStrain Relief NutVoltage RatedStrain Relief NutYotage Rated8A	Category	Connectors, Interconnects
SeriesPLConnector TypeReceptacle, Female SocketsNumber of Positions4Shell Size - Insert-Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch Lock, Push-PullOrientationNIngress ProtectionIP50 - Dust ProtectedShell Material, FinishOlysulfone (PSU)Contact FinishGoldFeaturesStrain Relief NutVoltage - Rated-Kenter Material FinishSell Strain Relief NutSoltage - RatedSaltStrain Relief NutSaltStrain Relief NutSalt		Circular Connectors
Connector TypeReceptacle, Female SocketsNumber of Positions4Shell Size - Insert-Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch Lock, Push-PullOrientationMoust ProtectedIngress ProtectionPiolysulfone (PSU)Shell Material, FinishGoldContact FinishStrain Relief NutVoltage - RatedStrain Relief NutSoltage - RatedSaleCurrent RatingSaleShell Material, FinishSaleStrain Relief NutStrain Relief NutSoltage - RatedSaleShell Strain StrainSaleShell Strain Strain StrainSaleShell Strain Str	Package	-
Number of Positions4Shell Size - Insert-Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch Lock, Push-PullOrientationAIngress ProtectionIP50 - Dust ProtectedShell Material, FinishGoldFeaturesStrain Relief NutVoltage - Rated-Current Rating8A	Series	PL
Shell Size - Insert-Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch Lock, Push-PullOrientationAIngress ProtectionIP50 - Dust ProtectedShell Material, FinishPolysulfone (PSU)Contact FinishGoldFeaturesStrian Relief NutVoltage - Rated-Rurent Rating8A	Connector Type	Receptacle, Female Sockets
Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch Lock, Push-PullOrientationAIngress ProtectionPolysul FrotectedShell Material, FinishPolysulfone (PSU)Contact FinishGoldFeaturesStrain Relief NutVoltage - Rated-Kurrent Rating8A	Number of Positions	4
Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeLatch Lock, Push-PullOrientationAOrientationIP50 - Dust ProtectedShell Material, FinishPolysulfone (PSU)Contact FinishGoldFeaturesStrain Relief NutVoltage - Rated-Kurrent RatingBA	Shell Size - Insert	-
TerminationSolder CupFastening TypeLatch Lock, Push-PullOrientationAIngress ProtectionIP50 - Dust ProtectedShell Material, FinishPolysulfone (PSU)Contact FinishGoldFeaturesStrain Relief NutVoltage - Rated-Kurrent RatingShall	Shell Size, MIL	-
Fastening TypeLatch Lock, Push-PullOrientationAIngress ProtectionIP50 - Dust ProtectedShell Material, FinishPolysulfone (PSU)Contact FinishGoldFeaturesStrain Relief NutVoltage - Rated-Current Rating8A	Mounting Type	Free Hanging (In-Line)
OrientationAIngress ProtectionIP50 - Dust ProtectedShell Material, FinishPolysulfone (PSU)Contact FinishGoldFeaturesStrain Relief NutVoltage - Rated-Current Rating8A	Termination	Solder Cup
Ingress ProtectionIP50 - Dust ProtectedShell Material, FinishPolysulfone (PSU)Contact FinishGoldFeaturesStrain Relief NutVoltage - Rated-Current Rating8A	Fastening Type	Latch Lock, Push-Pull
Shell Material, FinishPolysulfone (PSU)Contact FinishGoldFeaturesStrain Relief NutVoltage - Rated-Current Rating8A	Orientation	А
Contact FinishGoldFeaturesStrain Relief NutVoltage - Rated-Current Rating8A	Ingress Protection	IP50 - Dust Protected
FeaturesStrain Relief NutVoltage - Rated-Current Rating8A	Shell Material, Finish	Polysulfone (PSU)
Voltage - Rated-Current Rating8A	Contact Finish	Gold
Current Rating 8A	Features	Strain Relief Nut
-	Voltage - Rated	-
Report errors?	Current Rating	8A
		Report errors?

PLC3G821A04 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE UARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

PLC3G821A04 Payment Methods



PLC3G821A04 Shipping Methods



If you have any question about PLC3G821A04, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com