

PPPN062FFKS

Quote

PPPN062FFKS Information

Contraction terr	Part Number	PPPN062FFKS		
	Manufacturer	Sullins Connector Solutions		
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets		
	Description Package	CONN HEADER 2MM DUAL SMD 12POS		
For Reference Only		For the pricing/inventory/lead time, please contact		
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Q	

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



PPPN062FFKS Specifications

<table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-row><table-row><table-row><table-row><table-container><table-container><table-container><table-row><table-row><table-row><table-row><table-container><table-container><table-container><table-row><table-row><table-row><table-row><table-row><table-row><table-row><table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-row></table-container></table-container></table-container></table-row></table-row></table-row></table-row></table-container></table-container></table-container></table-row></table-row></table-row></table-row></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container>			
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderConnector TypeBeaderContact TypeBoard to BoardNumber of Positions12Number of Positions LoadedAllPitch - Mating0.079" (2.00mn)Number of Rows2Row Spacing - Mating0.079" (2.00mn)Mounting TypeSolderTerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldContact Finish Thickness - MatingIaskInsulation ColorBackInsulation Height0.173" (4.40mn)Contact Length - Post-	Manufacturer Part Number	PPPN062FFKS	
NumberRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderContact TypeBoard to BoardStyleBoard to BoardNumber of Positions12Number of Positions LoadedAllPich - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Munting TypeSolderTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish - MatingBiakInsulation ColorBiakInsulation FinishBiakSolderSolderSonder Finish Thickness - MatingSolderInsulation Finish - MatingSolderSolder Finish - SolderSolderSolder Finish - MatingSolderSolder Finish - Mating<	Manufacturer	Sullins Connector Solutions	
Package-Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions12Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Moutting TypeSolderTerminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish - MatingFashInsulation ColorBlackInsulation FieldJ.173" (4.40mm)Contact Length - Post-	Category	Connectors, Interconnects	
Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions12Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFastening TypeSurface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post-		Rectangular Connectors - Headers, Receptacles, Female Sockets	
Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions12Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Field0.173" (4.40mm)Contact Length - Post-	Package	-	
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions12Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountFerminationSurface MountFortentingSolderFortenting FypePosh-PullContact Finish - MatingGoldInsulation ColorBackInsulation Type0.173" (4.40mm)Contact Length - Post.	Series	-	
StyleBoard to BoardNumber of Positions12Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingFlashInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post-	Connector Type	Header	
Number of Positions12Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post-	Contact Type	Female Socket	
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post-	Style	Board to Board	
Pitch - Mating0.079" (2.00mm)Number of Rows2Row Spacing - Mating0.079" (2.00mm)Mounting Type0.079" (2.00mm)TerminationSurface MountFastening TypeSolderFontact Finish - MatingPosh-PullContact Finish - MatingFlashInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post-	Number of Positions	12	
Number of Rows2Number of Rows0.079" (2.00mm)Row Spacing - MatingSurface MountMounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post-	Number of Positions Loaded	All	
Row Spacing - Mating0.079" (2.00mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldFontact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post-	Pitch - Mating	0.079" (2.00mm)	
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post-	Number of Rows	2	
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post-	Row Spacing - Mating	0.079" (2.00mm)	
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post-	Mounting Type	Surface Mount	
Contact Finish - MatingGoldContact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post-	Termination	Solder	
Contact Finish Thickness - MatingFlashInsulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post-	Fastening Type	Push-Pull	
Insulation ColorBlackInsulation Height0.173" (4.40mm)Contact Length - Post-	Contact Finish - Mating	Gold	
Insulation Height0.173" (4.40mm)Contact Length - Post-	Contact Finish Thickness - Mating	Flash	
Contact Length - Post -	Insulation Color	Black	
-	Insulation Height	0.173" (4.40mm)	
	Contact Length - Post	-	
Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	Operating Temperature	-40°C ~ 105°C	
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0	

Contact Finish - Post	Gold	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?

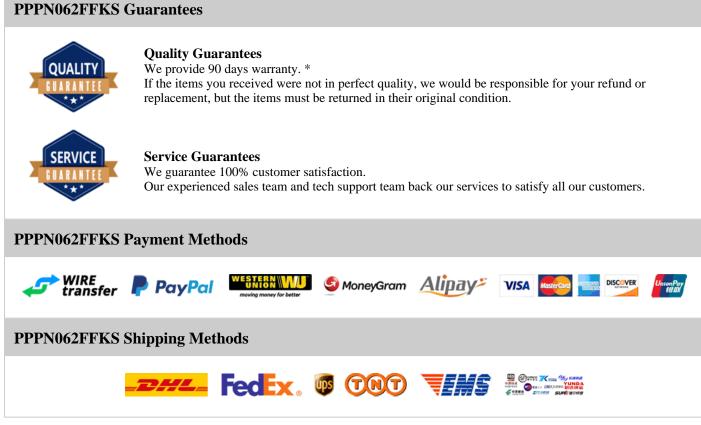

If you have any question about PPPN062FFKS, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com