

PPTC071LGBN-RC

PPTC071LGBN-RC Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



PPTC071LGBN-RC Specifications

Manufacturer Part NumberPPTC071LGBN-RCManufacturerSullins Connector SolutionsCategoryConnectors InterconnectsPackage-Series-Connector TypeHeaderContact TypeBoard to BoardNumber of Positions7Number of Positions Loaded1Number of Rows1Number of Rows1Number of Rows1Number of Rows1TerminationSolderSteining TypeVander MathematicaSolder Finish MatingSolderContact Finish Mating1Contact Finish PhatingSolderSteining TypeBoard to BoardSteining TypeSolderSteining TypeSolderSteining TypeSolderSteining TypeSolderContact Finish Finkeness - Mating-Contact Finish PhatingSolderStation ColorBlackInsulation ColorSolderStation Finish Thickenes - Mating-Contact Length - Post0.1024" (3.15mn)Contact Length - Post0.124" (3.15mn)Contact Length - Solt0.124" (3.15mn)Con				
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderConnector TypeBeaderStyleBoard to BoardNumber of Positions7Number of Positions LoadedAllPich - Mating0.100°(2.54mm)Number of Rows1Number of Rows0.100°(2.54mm)Number of Rows1PicninationSolderForninationSolderForninationSolderContact Finish - MatingInContact Finish - MatingInNumber of PositionsBlackFininationSolderFininationSolderFininationInContact Finish - MatingInInsulation ColorBlackInsulation Finish - MatingInov (2.54mm)Finish - MatingInSolderSolderFinish - MatingInSolderSol	Manufacturer Part Number	PPTC071LGBN-RC		
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions7Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - MatingSolderYouring TypePinch AngleTerminationSolderFastening TypePush-PullContact Finish - Mating-Contact Finish - MatingIinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Manufacturer	Sullins Connector Solutions		
Package-Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions7Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows-Row Spacing - MatingSolderMounting TypeSolderFerminationSolderFortact Finish - Mating-Contact Finish - Mating-Innulation ColorIinInsulation ColorBlackInsulation Height0.100° (2.54mm)Contact Funish - Post0.124° (3.15mm)	Category	Connectors, Interconnects		
Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions7Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleFastening TypeSolderContact Finish - Mating-Contact Finish - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Insulation Height0.100" (2.54mm)<		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions7Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderContact Finish - Mating-Contact Finish - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Insulation Height0.100" (2.54mm)Contact Finish - MatingSolderContact Finish - Mating1SolderIninContact Finish - Mating0.100" (2.54mm)Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Package	-		
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions7Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Number of Rows1Row Spacing - Mating-Mounting TypeSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Fungth0.100" (2.54mm)Contact Fungth0.100" (2.54mm)	Series	-		
StyleBoard to BoardNumber of Positions7Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Connector Type	Header		
Yumber of Positions7Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleMounting TypeSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.100° (2.54mm)Contact Length - Post0.124° (3.15mm)	Contact Type	Female Socket		
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Style	Board to Board		
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting Type-TerminationSolderFastening TypePush-PullContact Finish - Mating-Roust - Golder-Insulation ColorBlackInsulation Height - Post0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Number of Positions	7		
Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - Mating-Contact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Number of Positions Loaded	All		
Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Pitch - Mating	0.100" (2.54mm)		
Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Number of Rows	1		
TerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Row Spacing - Mating	-		
Fastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Mounting Type	Through Hole, Right Angle		
Contact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Termination	Solder		
Contact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Contact Finish - Mating	Tin		
Insulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Contact Finish Thickness - Mating	-		
Contact Length - Post 0.124" (3.15mm)	Insulation Color	Black		
-	Insulation Height	0.100" (2.54mm)		
Operating Temperature 40° C $\sim 105^{\circ}$ C	Contact Length - Post	0.124" (3.15mm)		
operating reinperature -40 C ~ 105 C	Operating Temperature	-40°C ~ 105°C		
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
			Report errors?

PPTC071LGBN-RC Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

PPTC071LGBN-RC Payment Methods

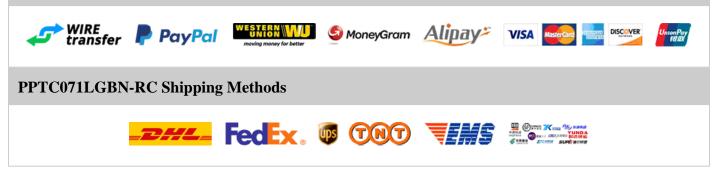

If you have any question about PPTC071LGBN-RC, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com