

PPTC241LGBN-RC

PPTC241LGBN-RC Information

		PPTC241LGBN-RC Sullins Connector Solutions	
www.heisener.com	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
Restaurant and the state of the	Description	CONN FEMALE 24POS .100" R/A TIN	127 24 mg
	Package	-	
		For the pricing/inventory/lead time, please contact	
For Reference Only		us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



PPTC241LGBN-RC Specifications

Manufacturer Part NumberPPTC241LGBN-RCManufacturerSullins Connector SolutionsCategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderContact TypeFemale SocketSyleBoard to BoardNumber of Positions LoadedAllNumber of Positions Loaded0.100° (2.54mm)Number of Rows1Row Spacing - MatingSolderFerninationSolderFerninationSolderContact Finish - Mating-Number of RowsInsultation ColorResting TypeBoardStation Finish - MatingSolderFerninationSolderFerninationSolderStation Finish - Mating-Contact Finish - MatingInsultation ColorInsulation ColorBackInsulation Finish Finishenses - Mating-Contact Finish Thickness - Mating-Solar-Station Finish Finishense-Solar-Solar Contact Length - Post0.100° (2.54mm)Contact Length - Post0.100° (2.54mm)Solar-Solar-Solar-Solar-Solar-Solar-Solar-Solar-Solar-Solar-Solar-Solar-Sola		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderConnector TypeBeadreStyleBoard to BoardNumber of Positions24Number of Positions Loaded1Pitch - Mating0.100°(2.54mm)Number of Rows1Number of Rows0.100°(2.54mm)Number of Positions0.100°(2.54mm)Number of Rows1Fornig TypeSolderFornig TypeInsult AngleStating TypeInsult AngleStating TypeInsult AngleContact Finish - Mating-Insult ColorBlackInsult ColorBlackInsult ColorInsult AngleInsult ColorInsult AngleInsult ColorSolderInsult ColorInsult AngleInsult ColorSolderInsult ColorInsult AngleInsult ColorInsult Angle<	Manufacturer Part Number	PPTC241LGBN-RC
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - MatingSolderYouring TypePitch - MatingYouring TypeSolderFerninationSolderFastening TypePush-PullContact Finish - Mating-Contact Finish - Mating-Insulation ColorBlackInsulation Height0.100° (2.54mm)Contact Length - Post0.124° (3.15mm)	Manufacturer	Sullins Connector Solutions
Package-Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows-Row Spacing - MatingSolderMounting TypeSolderFerminationSolderFastening TypePush-PullContact Finish - Mating-Number of PositionsSolderFastening TypeBush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.100° (2.54mm)Contact Length - Post0.124° (3.15mm)	Category	Connectors, Interconnects
Series-Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleFastening TypeSolderContact Finish - Mating-Contact Finish - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Finish PostBlackInsulation Height0.100" (2.54mm)Contact Finish Post0.100" (2.54mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeHeaderContact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderContact Finish - Mating-Contact Finish - Mating-Insulation ColorBlackInsulation Height0.100° (2.54mm)Insulation Height0.100° (2.54mm)Contact Finish Thickness - Mating-Insulation Finish Thickness - Mating0.100° (2.54mm)Insulation Height0.100° (2.54mm)Insulation Height0.100° (2.54mm)Insulation Height0.100° (2.54mm)Insulation Height0.100° (2.54mm)Insulation Height0.102° (3.15mm)	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeSolderFarminationSolderFastening TypePush-PullContact Finish - Mating-Roust Finish - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Fungth - Post0.101" (2.54mm)	Series	-
StyleBoard to BoardNumber of Positions24Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Connector Type	Header
Number of Positions24Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting Type-TerminationSolderFastening TypePush-PullContact Finish - Mating-Roust - Golder-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Number of Positions	24
Number of Rows1Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - Mating-Contact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Mounting Type	Through Hole, Right Angle
Contact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Termination	Solder
Contact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Contact Finish - Mating	Tin
Insulation Height0.100" (2.54mm)Contact Length - Post0.124" (3.15mm)	Contact Finish Thickness - Mating	-
Contact Length - Post 0.124" (3.15mm)	Insulation Color	Black
-	Insulation Height	0.100" (2.54mm)
Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	Contact Length - Post	0.124" (3.15mm)
	Operating Temperature	-40°C ~ 105°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
			Report errors?

PPTC241LGBN-RC Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

PPTC241LGBN-RC Payment Methods

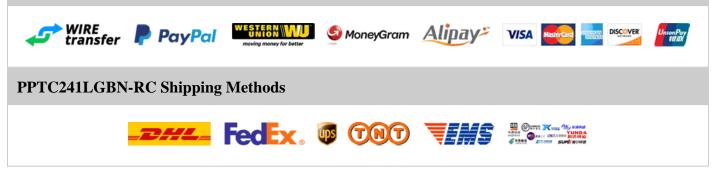

If you have any question about PPTC241LGBN-RC, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com