

PS-60SG-D4TS1-1E

PS-60SG-D4TS1-1E Information

Heisener.com	 PS-60SG-D4TS1-1E JAE Electronics Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets CONN HEADER 60POS	
For Reference Only	For the pricing/inventory/lead time, please contact us	
	Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



PS-60SG-D4TS1-1E Specifications

Manufacturer Part NumberPS-60SG-D4TS1-IEManufacturerJAE ElectronicsCategoryConnectors, InterconnectsPackage-SeriesPSConnector TypeReceptacles, Receptacles, Female SocketsContact TypeReceptacleContact TypeBoard to BoardNumber of Positions60Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.100° (2.54mm)Mouning TypeThrough HoleMouning TypeSolderFastening TypeQualGotact Finish - MatingGoldStriening TypeSolderFastening TypeQualMouning TypeSolderFastening TypeQualStating TypeSolderFastening TypeSolderFastening TypeSoldContact Finish - Mating0.101° (2.101m)Contact Finish - MatingMuser Contact SolderFastening TypeSolderFastening TypeSolderContact Finish - MatingSolderContact Finish - Mating3.21° (0.60mr)SolderSolderSolderSolderContact Finish - Mating3.21° (0.60mr)Solder <t< th=""><th></th><th></th></t<>		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesPSConnector TypeReceptacleContact TypeBoard to BoardNumber of Positions60Number of Positions Loaded100° (2.54mm)Pitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - MatingSolderMonting TypeSolderFreminationSolderFreminationSolderFortact Finish - MatingGoldContact Finish - MatingGoldFortact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingSoliderFinish - MatingGoldContact Finish - MatingGoldContact Finish - MatingSoliderFinish - MatingSoliderContact Finish - MatingSoliderFinish - MatingSolider <td< td=""><td>Manufacturer Part Number</td><td>PS-60SG-D4TS1-1E</td></td<>	Manufacturer Part Number	PS-60SG-D4TS1-1E
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesPSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQualContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation Color-	Manufacturer	JAE Electronics
Package-SeriesPSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeOslderContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation Color-	Category	Connectors, Interconnects
SeriesPSConnector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypeQualContact Finish - MatingGoldContact Finish - Mating3.9µin (0.10µm)Insulation Color-		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough HoleFareninationSolderContact Finish - MatingGoldContact Finish - MatingSolderInsultation ColorJapin (0.10µm)Contact Finish Thickness - MatingJapin (0.10µm)Insultation Color-	Package	-
Contact TypeFemale SocketStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeDinoy (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonact Finish Thickness - Mating3.9µin (0.10µm)Insulation Color-	Series	PS
StyleBoard to BoardStyleBoard to BoardNumber of Positions60Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldIonaut Finish Thickness - Mating3.9µin (0.10µm)Insulation Color-	Connector Type	Receptacle
Number of Positions60Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeO.100" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation Color-	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation Color-	Style	Board to Board
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldSolupin (0.10µm)3.9µin (0.10µm)Insulation Color-	Number of Positions	60
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation Color-	Number of Positions Loaded	All
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation Color-	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation Color-	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation Color-	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation Color-	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating3.9µin (0.10µm)Insulation Color-	Termination	Solder
Contact Finish Thickness - Mating3.9μin (0.10μm)Insulation Color-	Fastening Type	Push-Pull
Insulation Color -	Contact Finish - Mating	Gold
	Contact Finish Thickness - Mating	3.9µin (0.10µm)
$\mathbf{L}_{\mathbf{r}} = \mathbf{L}_{\mathbf{r}} = $	Insulation Color	-
Insulation Height 0.374 (9.50mm)	Insulation Height	0.374" (9.50mm)
Contact Length - Post 0.115" (2.92mm)	Contact Length - Post	0.115" (2.92mm)
Operating Temperature $-55^{\circ}C \sim 85^{\circ}C$	Operating Temperature	-55°C ~ 85°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Gold
Mated Stacking Heights	-
Ingress Protection	-
Features	Polarizing Key
	Report errors?

PS-60SG-D4TS1-1E Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

PS-60SG-D4TS1-1E Payment Methods

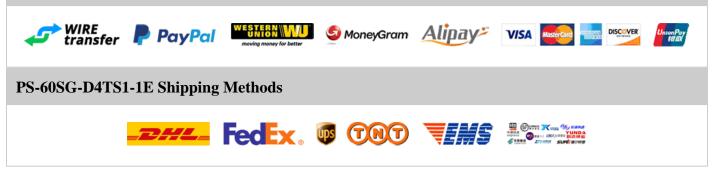

If you have any question about PS-60SG-D4TS1-1E, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com