


PSDR095W

PSDR095W Information

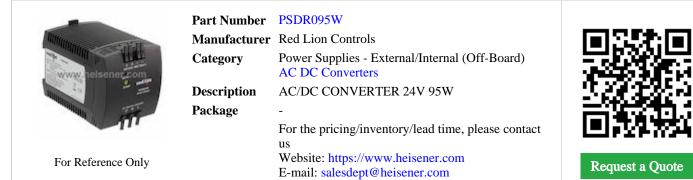

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



PSDR095W Specifications

| <table-row><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-row><table-row><table-row><table-row><table-container><table-container><table-container><table-row><table-row><table-row><table-row><table-container><table-container><table-container><table-row><table-row><table-row><table-row></table-row></table-row></table-row></table-row></table-container></table-container></table-container></table-row></table-row></table-row></table-row></table-container></table-container></table-container></table-row></table-row></table-row></table-row></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-row> | - | |
|--|--------------------------|---|
| CategoryPower Supplies - External/Internal (Off-Board) AC DC ConvertersPackage-SeriesPSDRTypeEnclosedNuber of Outputs1Voltage - Input100 ~ 120 VAC, 220 ~ 240 VACVoltage - Output 100 ~ 120 VAC, 220 ~ 240 VACVoltage - Output 2-Voltage - Output 3-Voltage - Output 4-Voltage - SoltationJSVPower (Watts)-Voltage - IsolationITE (commercial)Voltage - Isolation-Voltage - Isolation-Pore - Gorc-Features-Mouting TypeDIN RailSize / Dimension-Voltage - Soltage-Voltage - Soltage-Size / Dimension-Voltage - Soltage-Voltage - Soltage-Size / Dimension-Voltage - Soltage-Voltage - Soltage-Voltage - Soltage-Voltage - Soltage-Voltage - Soltage- <td>Manufacturer Part Number</td> <td>PSDR095W</td> | Manufacturer Part Number | PSDR095W |
| AC DC Converters Package - Series PSDR Type Enclosed Number of Outputs 1 Voltage - Input 100 ~ 120 VAC, 220 ~ 240 VAC Voltage - Output 1 24V Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Voltage - Solation 3.9A Power (Watts) 95W Voltage - Isolation 3kV (3000V) Efficiency 90% Operating Temperature -10°C ~ 60°C Features Adjustable Output, DC Input Capable, Load Sharing Mounting Type DIN Rail Size / Dimension 4.06° L x 2.87° W x 2.95° H (| Manufacturer | Red Lion Controls |
| Package.SeriesPSDRTypeEnclosedNumber of Outputs1Voltage - Input100 ~ 120 VAC, 220 ~ 240 VACVoltage - Output 104VVoltage - Output 2.Voltage - Output 3.Voltage - Output 4.Voltage - Output 5.Voltage - Output 6.Voltage - Output 7.Voltage - Output 6.Voltage - Solution 7.Voltage - Solution 7 </td <td>Category</td> <td>Power Supplies - External/Internal (Off-Board)</td> | Category | Power Supplies - External/Internal (Off-Board) |
| Series PSDR Type Enclosed Number of Outputs 1 Voltage - Input 100 ~ 120 VAC, 220 ~ 240 VAC Voltage - Output 1 24V Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Current - Output (Max) 3.9A Power (Watts) 95W Applications ITE (Commercial) Voltage - Isolation 3.4V (3000V) Operating Temperature 90% Operating Temperature -10°C ~ 60°C Features Adjustabe Output, DC Input Capable, Load Sharing Mounting Type DIN Rail Size / Dinension 4.06° L x 2.87" W x 2.95" H (103.0mm x 73.0mm x 75.0mm) | | AC DC Converters |
| TypeEnclosedNumber of Outputs1Voltage - Input100 ~ 120 VAC, 220 ~ 240 VACVoltage - Output 124VVoltage - Output 2-Voltage - Output 3-Voltage - Output 4-Voltage - Output 4-Voltage - Output 4-Voltage - Output 4-Voltage - Output 5-Voltage - Output 6-Voltage - Output 7-Voltage - Solation-Voltage - Isolation-Voltage - Isolati | Package | - |
| Number of Outputs 1 Voltage - Input 100 ~ 120 VAC, 220 ~ 240 VAC Voltage - Output 1 24V Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Current - Output (Max) 3.9A Power (Wats) 95W Applications ITE (Commercial) Voltage - Isolation 3kV (3000V) Efficiency 90% Operating Temperature -10°C ~ 60°C Features Adjustable Output, DC Input Capable, Load Sharing Mounting Type DIN Rail Size / Dimension 4.06" L x 2.87" W x 2.95" H (103.0mm x 73.0mm x 75.0mm) | Series | PSDR |
| Voltage - Input 100 ~ 120 VAC, 220 ~ 240 VAC Voltage - Output 1 24V Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Current - Output (Max) 3.9A Power (Watts) 95W Applications ITE (Commercial) Voltage - Isolation 3kV (3000V) Efficiency 90% Operating Temperature -10°C ~ 60°C Features Adjustable Output, DC Input Capable, Load Sharing Mounting Type DIN Rail Size / Dimension 4.06" L x 2.87" W x 2.95" H (103.0mm x 73.0mm x 75.0mm) | Туре | Enclosed |
| Voltage - Output 1 24V Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Current - Output (Max) 3.9A Power (Watts) 95W Applications ITE (Commercial) Voltage - Isolation 3kV (3000V) Efficiency 90% Operating Temperature -10°C ~ 60°C Features Adjustable Output, DC Input Capable, Load Sharing Mounting Type DIN Rail | Number of Outputs | 1 |
| Voltage - Output 2 - Voltage - Output 3 - Voltage - Output 4 - Current - Output (Max) 3.9A Power (Watts) 95W Applications ITE (Commercial) Voltage - Isolation 3kV (3000V) Efficiency 90% Operating Temperature -10°C ~ 60°C Features Adjustable Output, DC Input Capable, Load Sharing Mounting Type DIN Rail Size / Dimension 4.06" L x 2.87" W x 2.95" H (103.0mm x 73.0mm x 75.0mm) | Voltage - Input | 100 ~ 120 VAC, 220 ~ 240 VAC |
| Voltage - Output 3 - Voltage - Output 4 - Current - Output (Max) 3.9A Power (Watts) 95W Applications ITE (Commercial) Voltage - Isolation 3kV (3000V) Efficiency 90% Operating Temperature -10°C ~ 60°C Features Adjustable Output, DC Input Capable, Load Sharing Mounting Type DIN Rail Size / Dimension 4.06"L x 2.87" W x 2.95" H (103.0mm x 73.0mm x 75.0mm) | Voltage - Output 1 | 24V |
| Voltage - Output 4-Current - Output (Max)3.9APower (Watts)95WApplicationsITE (Commercial)Voltage - Isolation3kV (3000V)Efficiency90%Operating Temperature-10°C ~ 60°CFeaturesAdjustable Output, DC Input Capable, Load SharingMounting TypeDIN RailSize / Dimension4.06" L x 2.87" W x 2.95" H (103.0mm x 73.0mm x 75.0mm) | Voltage - Output 2 | - |
| Current - Output (Max)3.9APower (Watts)95WApplicationsITE (Commercial)Voltage - Isolation3kV (3000V)Efficiency90%Operating Temperature-10°C ~ 60°CFeaturesAdjustable Output, DC Input Capable, Load SharingMounting TypeDIN RailSize / Dimension4.06" L x 2.87" W x 2.95" H (103.0mm x 73.0mm x 75.0mm) | Voltage - Output 3 | - |
| Power (Watts)95WApplicationsITE (Commercial)Voltage - Isolation3kV (3000V)Efficiency90%Operating Temperature-10°C ~ 60°CFeaturesAdjustable Output, DC Input Capable, Load SharingMounting TypeDIN RailSize / Dimension4.06" L x 2.87" W x 2.95" H (103.0mm x 73.0mm x 75.0mm) | Voltage - Output 4 | - |
| ApplicationsITE (Commercial)Voltage - Isolation3kV (3000V)Efficiency90%Operating Temperature-10°C ~ 60°CFeaturesAdjustable Output, DC Input Capable, Load SharingMounting TypeDIN RailSize / Dimension4.06" L x 2.87" W x 2.95" H (103.0mm x 73.0mm x 75.0mm) | Current - Output (Max) | 3.9A |
| NumberStateVoltage - Isolation3kV (3000V)Efficiency90%Operating Temperature-10°C ~ 60°CFeaturesAdjustable Output, DC Input Capable, Load SharingMounting TypeDIN RailSize / Dimension4.06" L x 2.87" W x 2.95" H (103.0mm x 73.0mm x 75.0mm) | Power (Watts) | 95W |
| Efficiency90%Operating Temperature-10°C ~ 60°CFeaturesAdjustable Output, DC Input Capable, Load SharingMounting TypeDIN RailSize / Dimension4.06" L x 2.87" W x 2.95" H (103.0mm x 73.0mm x 75.0mm) | Applications | ITE (Commercial) |
| Operating Temperature-10°C ~ 60°CFeaturesAdjustable Output, DC Input Capable, Load SharingMounting TypeDIN RailSize / Dimension4.06" L x 2.87" W x 2.95" H (103.0mm x 73.0mm x 75.0mm) | Voltage - Isolation | 3kV (3000V) |
| FeaturesAdjustable Output, DC Input Capable, Load SharingMounting TypeDIN RailSize / Dimension4.06" L x 2.87" W x 2.95" H (103.0mm x 73.0mm x 75.0mm) | Efficiency | 90% |
| Mounting Type DIN Rail Size / Dimension 4.06" L x 2.87" W x 2.95" H (103.0mm x 73.0mm x 75.0mm) | Operating Temperature | $-10^{\circ}\mathrm{C} \sim 60^{\circ}\mathrm{C}$ |
| Size / Dimension 4.06" L x 2.87" W x 2.95" H (103.0mm x 73.0mm x 75.0mm) | Features | Adjustable Output, DC Input Capable, Load Sharing |
| | Mounting Type | DIN Rail |
| Report errors? | Size / Dimension | 4.06" L x 2.87" W x 2.95" H (103.0mm x 73.0mm x 75.0mm) |
| | | Report errors? |

PSDR095W Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

PSDR095W Payment Methods WIRE PayPai Methods PSDR095W Shipping Methods EEEEE. IN OUR IN INC.

If you have any question about PSDR095W, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com