


PSU12465

PSU12465 Information

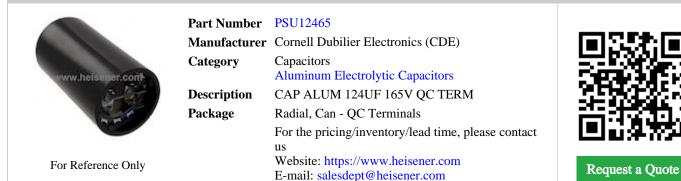

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



PSU12465 Specifications

Manufacturer Part Number PSU12465 Manufacturer Cornell Dubilier Electronics (CDE) Category Capacitors Atuminum Electrolytic Capacitors Atuminum Electrolytic Capacitors Package Radial, Can - QC Terminals Stries PSU Capacitance 124µF Tolerance -0%, +20% Voltage - Rated 165 V ESR (Equivalent Series Resistance) - Lifetime @ Temp. - Operating Temperature 40°C ~ 65°C Polarization Bi-Polar Applications Motor Start Ripple Current - Low Frequency - Impedance - Lad Spacing - Size / Dimension 1.438" Dia (36.53mm) Size / Dimension - Size / Dimension - Height - Seated (Max) 3.75" (85.73mm) Surface Mount Land Size - Package / Case Radial, Can - QC Terminals		
CategoryCapacitorsAluminum Electrolytic CapacitorsPackageRadial, Can - QC TerminalsSeriesPSUCapacitance124µFTolerance-0%, +20%Voltage - Rated165VESR (Equivalent Series Resistance)-Lifetime @ TempOperating Temperature-40°C ~ 65°CPolarizationBi-PolarApplicationsMotor StartRipple Current - Low Frequency-Impedance-Lead Spacing-Size / Dimension1.438" Dia (36.53mm)Height - Seated (Max)3.375" (85.73mm)Surface Mount Land Size-Mounting TypeChassis MountPackage / CaseRadial, Can - QC Terminals	Manufacturer Part Number	PSU12465
Auminum Electrolytic CapacitorsPackageRadial, Can - QC TerminalsSeriesPSUCapacitance124µFTolerance-0%, +20%Voltage - Rated165VESR (Equivalent Series Resistance)-Lifetime @ TempOperating Temperature40°C ~ 65°CPolarizationBi-PolarApplicationsMotor StartRipple Current - Low Frequency-Impedance-Lided Spacing-Size / Dimension1.438° Dia (36.53mm)Height - Seated (Max)3.375° (85.73mm)Surface Mount Land Size-Nounting TypeChassis MountPackage / CaseRadial, Can - QC Terminals	Manufacturer	Cornell Dubilier Electronics (CDE)
PackageRadial, Can - QC TerminalsSeriesPSUCapacitance124µFTolerance-0%, +20%Voltage - Rated65VESR (Equivalent Series Resistance)-Lifetime @ TempOperating Temperature40°C ~ 65°CPolarizationBi-PolarApplicationsMotor StartRipple Current - Low Frequency-Impedance-Lided Spacing-Siz / Dimension1.438° Dia (36.53mm)Height - Seated (Max)3.75° (85.73mm)Surface Mount Land Size-Mounting TypeChasis MountPackage / CaseRadial, Can - QC Terminals	Category	Capacitors
SeriesPSUCapacitance124µFTolerance-0%, +20%Voltage - Rated165VESR (Equivalent Series Resistance)-Lifetime @ TempOperating Temperature40°C ~ 65°CPolarizationBi-PolarApplicationsMotor StartRipple Current - High Frequency-Impedance-Liad Spacing-Size / Dimension1.438° Dia (36.53mm)Height - Seated (Max)3.375° (85.73mm)Surface Mount Land Size-Mounting TypeChasis MountPackage / CaseRatial, Can - QC Terminals		Aluminum Electrolytic Capacitors
Capacitance124µFTolerance-0%, +20%Voltage - Rated165VESR (Equivalent Series Resistance)-Lifetime @ TempOperating Temperature40°C ~ 65°CPolarizationBi-PolarApplicationsMotor StartRipple Current - Low Frequency-Impedance-Liad Spacing-Size / Dimension1.438° Dia (36.53mm)Height - Seated (Max)3.375° (85.73mm)Surface Mount Land Size-Mounting TypeChasis MountPackage / CaseRadial, Can - QC Terminals	Package	Radial, Can - QC Terminals
Tolerance-0%, +20%Voltage - Rated165VESR (Equivalent Series Resistance)-Lifetime @ TempOperating Temperature-40°C ~ 65°CPolarizationBi-PolarApplicationsMotor StartRipple Current - High Frequency-Lided Spacing-Size / Dimension1.438" Dia (36.53mm)Height - Seated (Max)3.375" (85.73mm)Surface Mount Land Size-Mounting TypeChassis MountPackage / CaseRatial, Can - QC Terminals	Series	PSU
Voltage - Rated165VESR (Equivalent Series Resistance)-Lifetime @ TempOperating Temperature-40°C ~ 65°CPolarizationBi-PolarApplicationsMotor StartRipple Current - Low Frequency-Impedance-Lead Spacing-Size / Dimension1.438" Dia (36.53mm)Height - Seated (Max)3.375" (85.73mm)Surface Mount Land Size-Pounting TypeChassis MountPackage / CaseRational Carrent Index	Capacitance	124µF
ESR (Equivalent Series Resistance)-Lifetime @ TempOperating Temperature-40°C ~ 65°CPolarizationBi-PolarApplicationsMotor StartRipple Current - Low Frequency-Aippleace-Impedance-Size / Dimension1.438" Dia (36.53mm)Height - Seated (Max)3.375" (85.73mm)Surface Mount Land Size-Mounting TypeChasis MountPackage / CaseRadial, Can - QC Terminals	Tolerance	-0%, +20%
Lifetime @ TempOperating Temperature-40°C ~ 65°CPolarizationBi-PolarApplicationsMotor StartRipple Current - Low Frequency-Ripple Current - High Frequency-Impedance-Lead Spacing-Size / Dimension1.438" Dia (36.53mm)Height - Seated (Max)3.375" (85.73mm)Surface Mount Land Size-Mounting TypeChassis MountPackage / CaseRadial, Can - QC Terminals	Voltage - Rated	165V
Operating Temperature-40°C ~ 65°CPolarizationBi-PolarApplicationsMotor StartRipple Current - Low Frequency-Ripple Current - High Frequency-Impedance-Lead Spacing-Size / Dimension1.438" Dia (36.53mm)Height - Seated (Max)3.375" (85.73mm)Surface Mount Land Size-Mounting TypeChassis MountPackage / CaseRadial, Can - QC Terminals	ESR (Equivalent Series Resistance)	-
PolarizationBi-PolarPolarizationMotor StartApplications-Ripple Current - Low Frequency-Ripple Current - High Frequency-Impedance-Lead Spacing-Size / Dimension1.438" Dia (36.53mm)Height - Seated (Max)3.375" (85.73mm)Surface Mount Land Size-Mounting TypeChassis MountPackage / CaseRadial, Can - QC Terminals	Lifetime @ Temp.	-
ApplicationsMotor StartRipple Current - Low Frequency-Ripple Current - High Frequency-Impedance-Lead Spacing-Size / Dimension1.438" Dia (36.53mm)Height - Seated (Max)3.375" (85.73mm)Surface Mount Land Size-Mounting TypeChassis MountPackage / CaseRadial, Can - QC Terminals	Operating Temperature	-40°C ~ 65°C
IIRipple Current - Low Frequency-Ripple Current - High Frequency-Impedance-Lead Spacing-Size / Dimension1.438" Dia (36.53mm)Height - Seated (Max)3.375" (85.73mm)Surface Mount Land Size-Mounting TypeChassis MountPackage / CaseRadial, Can - QC Terminals	Polarization	Bi-Polar
Ripple Current - High Frequency-Impedance-Lead Spacing-Size / Dimension1.438" Dia (36.53mm)Height - Seated (Max)3.375" (85.73mm)Surface Mount Land Size-Mounting TypeChassis MountPackage / CaseRadial, Can - QC Terminals	Applications	Motor Start
Impedance-Lead Spacing-Size / Dimension1.438" Dia (36.53mm)Height - Seated (Max)3.375" (85.73mm)Surface Mount Land Size-Mounting TypeChassis MountPackage / CaseRadial, Can - QC Terminals	Ripple Current - Low Frequency	-
Lead Spacing-Size / Dimension1.438" Dia (36.53mm)Height - Seated (Max)3.375" (85.73mm)Surface Mount Land Size-Mounting TypeChassis MountPackage / CaseRadial, Can - QC Terminals	Ripple Current - High Frequency	-
Size / Dimension1.438" Dia (36.53mm)Height - Seated (Max)3.375" (85.73mm)Surface Mount Land Size-Mounting TypeChassis MountPackage / CaseRadial, Can - QC Terminals	Impedance	-
Height - Seated (Max)3.375" (85.73mm)Surface Mount Land Size-Mounting TypeChassis MountPackage / CaseRadial, Can - QC Terminals	Lead Spacing	-
Surface Mount Land Size-Mounting TypeChassis MountPackage / CaseRadial, Can - QC Terminals	Size / Dimension	1.438" Dia (36.53mm)
Mounting TypeChassis MountPackage / CaseRadial, Can - QC Terminals	Height - Seated (Max)	3.375" (85.73mm)
Package / Case Radial, Can - QC Terminals	Surface Mount Land Size	-
	Mounting Type	Chassis Mount
Report errors?	Package / Case	Radial, Can - QC Terminals
		Report errors?

PSU12465 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE GUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.



If you have any question about PSU12465, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com