


PTF65604K00BYBF

PTF65604K00BYBF Information

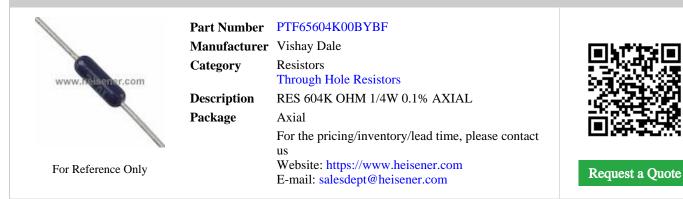

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



PTF65604K00BYBF Specifications

Manufacturer Part Number PTF65604K00BYBF Manufacturer Vishay Dale Category Resistors Through Hole Resistors Through Hole Resistors Package Axial Series PTF Resistance 604 KOhms Tolerance ±0.1% Power (Watts) 0.25W, 1/4W Composition Metal Film Features Moisture Resistant Operating Temperature 55°C ~ 150°C Operating Temperature Axial Steig / Case Axial Supplier Device Package Axial Size / Dimension 0.145° Diax 0.375° L (3.68mm x 9.53mm) Height - Seated (Max) - Number of Terminations 2		
CategoryResistorsThrough Hole ResistorsPackageAxialSeriesPTFResistance604 kOhmsTolerance±0.1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesMoisture ResistantTemperature Coefficient±10pm/°COperating Temperature>55°C ~ 150°CPackage / CaseAxialSize / Dimension0.145° Dia x 0.375° L (3.68mm x 9.53mm)Height - Seated (Max)2Number of Terminations2Failure Rate-	Manufacturer Part Number	PTF65604K00BYBF
Through Hole ResistorsPackageAxialPackagePTFResistance604 kOhmsTolerance±0.1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesMoisture ResistantTomparture Coefficient±10ppn/°COperating Temperature-55°C ~ 150°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145° Dia x 0.375° L (3.68mm x 9.53mm)Height - Seated (Max)2Sizel Rate-Failure Rate-Failur	Manufacturer	Vishay Dale
PackageAxialSeriesPTFResistance604 kOhmsTolerance604 kOhmsTolerance0.1%Power (Watts)0.2SW, 1/4WCompositionMetal FilmFeaturesMoisture ResistantTemperature Coefficient±10pm/°COperating Temperature>55° c ~ 150°CPackage / CaseAxialSupplier Device Package0.145° Dia x 0.375° L (3.68mm x 9.53mm)Fieight - Seated (Max)2Aunber of Terminations2Failure Rate-	Category	Resistors
SeriesPTFResistance604 kOhmsTolerance±0.1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesMoisture ResistantTemperature Coefficient±10pm/°COperating Temperature-55°C ~ 150°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-		Through Hole Resistors
Resistance604 kOhmsTolerance±0.1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesMoisture ResistantTemperature Coefficient±10pm/°COperating Temperature>55°C ~ 150°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Rate- <t< td=""><td>Package</td><td>Axial</td></t<>	Package	Axial
Tolerance±0.1%Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesMoisture ResistantTemperature Coefficient±10ppm/°COperating Temperature-55°C ~ 150°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)-Aumber of Terminations2Failure Rate-Other Seated (Max)-Suppler Device Package-Suppler Device Package-Start Of Terminations-Suppler Of Terminations-Start Of Terminations	Series	PTF
Power (Watts)0.25W, 1/4WCompositionMetal FilmFeaturesMoisture ResistantTemperature Coefficient±10ppm/°COperating Temperature-55°C ~ 150°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)-Sumber of Terminations2Failure Rate-	Resistance	604 kOhms
CompositionMetal FilmFeaturesMoisture ResistantTemperature Coefficient±10pm/°COperating Temperature-55°C ~ 150°CPackage / CaseAxialSupplier Device Package0.145" Dia x 0.375" L (3.68mm x 9.53mm)Size / Dimension-Height - Seated (Max)2Number of Terminations2Failure Rate-	Tolerance	$\pm 0.1\%$
FeaturesMoisture ResistantTemperature Coefficient±10ppm/°COperating Temperature-55°C ~ 150°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	0.25W, 1/4W
Temperature Coefficient±10ppm/°COperating Temperature-55°C ~ 150°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Film
Operating Temperature-55°C ~ 150°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Moisture Resistant
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±10ppm/°C
Supplier Device PackageAxialSize / Dimension0.145" Dia x 0.375" L (3.68mm x 9.53mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 150°C
Number of Terminations0.145" Dia x 0.375" L (3.68mm x 9.53mm)Failure Rate-Output-State-	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations2Failure Rate-	Size / Dimension	0.145" Dia x 0.375" L (3.68mm x 9.53mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
		Report errors?

PTF65604K00BYBF Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

PTF65604K00BYBF Payment Methods



If you have any question about PTF65604K00BYBF, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com