


R82EC3330Z370K

R82EC3330Z370K Information

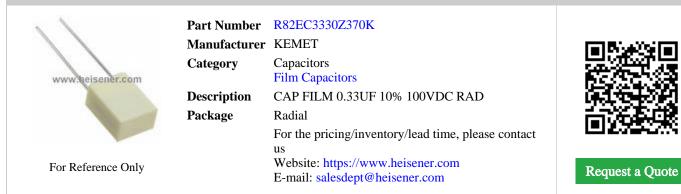

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



R82EC3330Z370K Specifications

Manufacturer KEMET Capacitors Film Capacitors Package Radial Series Radia Capacitance 0.33µF Yoltage Rating - AC 63V Voltage Rating - DC 100V Dielectric Material Polyester, Polyethylene Terephthalate (PET), Metallized - Stacked SSR (Equivalent Series Resistance) - Operating Temperature -55°C ~ 105°C Mounting Type Through Hole Stackage / Case Radial Size / Dimension 0.283° L x 0.177° W (7.20mm x 4.50mm) Height - Seated (Max) 0.378° (9.60mm) Termination PC Pins Lead Spacing 0.197° (5.00mm)			
CategoryCapacitorsFilm CapacitorsPackageRadialSeriesR82Capacitance0.33µFTolerance±10%Voltage Rating - AC63VVoltage Rating - DC100VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedSeries Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeRadialSize / Dimension0.283° L x 0.177° W (7.20mm x 4.50mm)Height - Seated (Max)0.378° (9.60mm)Lead Spacing-199° (5.00mm)ApplicationsAutomotiveFeatures-Features-Features-Seatures-	Manufacturer Part Number	R82EC3330Z370K	
Film CapacitorsPackageRadialSeriesR82Capacitance0.33µFTolerance±10%Voltage Rating - AC63VVoltage Rating - DC100VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.378" (9.60mm)Applications0.197" (5.00mm)ApplicationsAutomotiveFeatures-	Manufacturer	KEMET	
PackageRadialSeriesR82Capacitance0.33µFTolerance±10%Voltage Rating - AC63VVoltage Rating - DC100VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283° L x 0.177° W (7.20mm x 4.50mm)Height - Seated (Max)0.378° (9.60mm)Lead Spacing0.197° (5.00mm)ApplicationsAutomotiveFeatures-	Category	Capacitors	
SeriesR82Capacitance0.33µFTolerance±10%Voltage Rating - AC63VVoltage Rating - DC100VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.378" (9.60mm)Lead Spacing0.197" (5.00mm)ApplicationsAutomotiveFeatures-		Film Capacitors	
Capacitance0.33µFTolerance±10%Voltage Rating - AC63VVoltage Rating - DC100VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.378" (9.60mm)Lead Spacing0.197" (5.00mm)ApplicationsAutomotiveFeatures-	Package	Radial	
Tolerance±10%Voltage Rating - AC63VVoltage Rating - DC100VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.378" (9.60mm)TerminationPC PinsLead Spacing0.197" (5.00mm)Applications-Features-	Series	R82	
Voltage Rating - AC63VVoltage Rating - DC100VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.378" (9.60mm)TerminationPC PinsLead Spacing0.197" (5.00mm)Applications-Features-	Capacitance	0.33µF	
Voltage Rating - DC100VDielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.378" (9.60mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotiveFeatures-	Tolerance	±10%	
Dielectric MaterialPolyester, Polyethylene Terephthalate (PET), Metallized - StackedESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.378" (9.60mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotiveFeatures-	Voltage Rating - AC	63V	
ESR (Equivalent Series Resistance)-Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.378" (9.60mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotive	Voltage Rating - DC	100V	
Operating Temperature-55°C ~ 105°CMounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.378" (9.60mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotiveFeatures-	Dielectric Material	Polyester, Polyethylene Terephthalate (PET), Metallized - Stacked	
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.378" (9.60mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotiveFeatures-	ESR (Equivalent Series Resistance)	-	
Package / CaseRadialSize / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.378" (9.60mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotiveFeatures-	Operating Temperature	-55°C ~ 105°C	
Size / Dimension0.283" L x 0.177" W (7.20mm x 4.50mm)Height - Seated (Max)0.378" (9.60mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotiveFeatures-	Mounting Type	Through Hole	
Height - Seated (Max)0.378" (9.60mm)TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotiveFeatures-	Package / Case	Radial	
TerminationPC PinsLead Spacing0.197" (5.00mm)ApplicationsAutomotiveFeatures-	Size / Dimension	0.283" L x 0.177" W (7.20mm x 4.50mm)	
Lead Spacing0.197" (5.00mm)ApplicationsAutomotiveFeatures-	Height - Seated (Max)	0.378" (9.60mm)	
ApplicationsAutomotiveFeatures-	Termination	PC Pins	
Features -	Lead Spacing	0.197" (5.00mm)	
	Applications	Automotive	
Report errors?	Features	-	
			Report errors?

R82EC3330Z370K Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

R82EC3330Z370K Payment Methods





If you have any question about R82EC3330Z370K, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com