


RNC50H3320BSRSL

RNC50H3320BSRSL Information

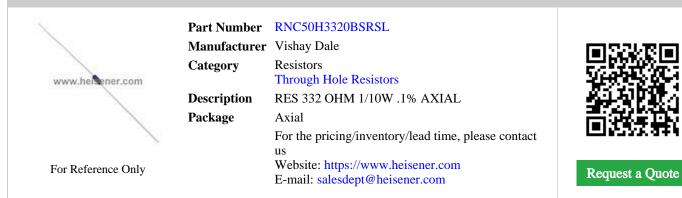

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



RNC50H3320BSRSL Specifications

Manufacturer Part Number RNC50H3320BSRSL Manufacturer Vishay Dale Category Resistors Through Hole Resistors Through Hole Resistors Package Axial Series Military, MIL-PRF-55182/07, RNC50 Resistance 320 Ohns Tolerance 40.1% Power (Wats) 0.1W, 1/10W Composition Metal Film Features Military, Moisture Resistant, Weldable Operating Temperature -65°C ~ 175°C Package / Case Axial Size / Dimension Axial Size / Dimension -0000'Di Dia x 0.150" L (1.78mm x 3.81mm) Height - Seated (Max) - Number of Terminations 2 Size / Dimension 50 (001%)		
CategoryResistorsPackageAxialPackageAxialSeriesMilitary, MIL-PRF-55182/07, RNC50Resistance332 OhmsTolerance±0.1%Power (Watts)0.1W, 1/10WCompositionMetal FilmFeaturesMilitary, Moisture Resistant, WeldableTemperature Coefficient±50pm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.070" Dia x 0.150" L (1.78mm x 3.81mm)Height - Seated (Max)2Failure Rate\$(0.001%)	Manufacturer Part Number	RNC50H3320BSRSL
PackageThrough Hole ResistorsPackageAxialSeriesMilitary, MIL-PRF-55182/07, RNC50Resistance332 OhmsTolerance±0.1%Power (Watts)0.1W, 1/10WCompositionMetal FilmFeaturesMilitary, Moisture Resistant, WeldableTolerance±50pm/°COperating Temperature-65°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialHeight - Seated (Max)-Height - Seated (Max)2Failure Rate\$(0.01%)	Manufacturer	Vishay Dale
PackageAxialSeriesMilitary, MIL-PRF-55182/07, RNC50Resistance332 OhmsTolerance±0.1%Power (Watts)0.1W, 1/10WCompositionMetal FilmFeaturesMilitary, Moisture Resistant, WeldableTemperature Coefficient±50pm/°COperating Temperature-65°C ~ 175°CPackage / CaseAxialSupplier Device Package0.070° Dia x 0.150° L (1.78mm x 3.81mm)Height - Seated (Max)2Failure Rate\$(0.001%)	Category	Resistors
SeriesMilitary, MIL-PRF-55182/07, RNC50Resistance332 OhmsTolerance±0.1%Power (Watts)0.1W, 1/10WCompositionMetal FilmFeaturesMilitary, Moisture Resistant, WeldableTemperature Coefficient±50pm/°COperating Temperature-65°C ~ 175°CPackage / CaseAxialSupplier Device Package0.070" Dia x 0.150" L (1.78mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure Rate\$(0.001%)		Through Hole Resistors
Resistance332 OmsTolerance±0.1%Power (Watts)0.1W, 1/10WCompositionMetal FilmFeaturesMilitary, Moisture Resistant, WeldableTemperature Coefficient±50ppm/°COperating Temperature-65°C ~ 175°CPackage / CaseAxialSupplier Device Package0.070" Dia x 0.150" L (1.78mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure RateS (0.001%)	Package	Axial
Tolerance±0.1%Power (Watts)0.1W, 1/10WCompositionMetal FilmFeaturesMilitary, Moisture Resistant, WeldableTemperature Coefficient±50pm/°COperating Temperature-65°C ~ 175°CPackage / CaseAxialSupplier Device Package0.070" Dia x 0.150" L (1.78mm x 3.81mm)Height - Seated (Max)-Failure RateS (0.001%)	Series	Military, MIL-PRF-55182/07, RNC50
Power (Watts)0.1W, 1/10WCompositionMetal FilmFeaturesMilitary, Moisture Resistant, WeldableTemperature Coefficient±50pm/°COperating Temperature-65°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.070" Dia x 0.150" L (1.78mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure RateS(0.001%)	Resistance	332 Ohms
CompositionMetal FilmFeaturesMilitary, Moisture Resistant, WeldableTemperature Coefficient±50ppm/°COperating Temperature-65°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.070" Dia x 0.150" L (1.78mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure RateS(0.001%)	Tolerance	$\pm 0.1\%$
FeaturesMilitary, Moisture Resistant, WeldableFeatures±50ppm/°COperating Temperature-65°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.070" Dia x 0.150" L (1.78mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure RateS(0.001%)	Power (Watts)	0.1W, 1/10W
Temperature Coefficient±50ppm/°COperating Temperature-65°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.070" Dia x 0.150" L (1.78mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure RateS(0.001%)	Composition	Metal Film
Operating Temperature-65°C ~ 175°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.070" Dia x 0.150" L (1.78mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure RateS (0.001%)	Features	Military, Moisture Resistant, Weldable
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.070" Dia x 0.150" L (1.78mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure RateS (0.001%)	Temperature Coefficient	±50ppm/°C
Supplier Device PackageAxialSize / Dimension0.070" Dia x 0.150" L (1.78mm x 3.81mm)Height - Seated (Max)-Number of Terminations2Failure RateS (0.001%)	Operating Temperature	-65°C ~ 175°C
Number of Terminations0.070" Dia x 0.150" L (1.78mm x 3.81mm)Failure Rate0.070" Dia x 0.150" L (1.78mm x 3.81mm)	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure RateS (0.001%)	Supplier Device Package	Axial
Number of Terminations2Failure RateS (0.001%)	Size / Dimension	0.070" Dia x 0.150" L (1.78mm x 3.81mm)
Failure RateS (0.001%)	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	S (0.001%)
Report crists.		Report errors?

RNC50H3320BSRSL Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

RNC50H3320BSRSL Payment Methods



If you have any question about RNC50H3320BSRSL, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com