


# RNX025100MFKEE

## **RNX025100MFKEE Information**

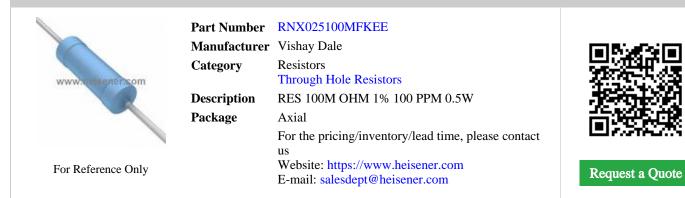

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## **RNX025100MFKEE** Specifications

Manufacturer Part Number RNX025100MFKEE   Manufacturer Vishay Dale   Category Resistors   Through Hole Resistors Through Hole Resistors   Package Axial   Series RNX   Resistance 100 MOhms   Tolerance ±1%   Power (Watts) 0.5W, 1/2W   Composition Metal Oxide Film   Features Flame Retardant Coating, High Voltage, Safety   Operating Temperature -55°C ~ 150°C   Package / Case Axial   Size / Dimension 0.140" Dia x 0.290" L (3.56mm x 7.37mm)   Height - Seated (Max) -   Number of Terminations 2   Failure Rate -		
CategoryResistorsPackageAxialPackageAxialSeriesRNXResistance100 MOhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal Oxide FilmFeaturesFlame Retardant Coating, High Voltage, SafetyTemperature Coefficient±100ppm/°COperating TemperatureAxialSupplier Device PackageAxialSize / Dimension0.140° Dia x 0.290° L (3.56mm x 7.37mm)Height - Seated (Max)2Failure Rate1Failure Rate2	Manufacturer Part Number	RNX025100MFKEE
Through Hole ResistorsPackageAxialPackageRNXResistance100 MOhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal Oxide FilmFeaturesFlame Retardant Coating, High Voltage, SafetyTomperature Coefficient±100pm/°COperating Temperature-55°C ~ 150°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.140° Dia x 0.290° L (3.56mm x 7.37mm)Height - Seated (Max)-Sunber of Terminations2Failure Rate-Failure Rate-	Manufacturer	Vishay Dale
PackageAxiaSeriesRNXResistance100 MOhmsTolerance±1%Power (Wats)0.5W, 1/2WCompositionMetal Oxide FilmFeaturesFlame Retardant Coating, High Voltage, SafetyOperating Temperature-55°C ~ 150°CPackage / CaseAxialSupplier Device Package0.140° Dia x 0.290° L (3.56mm x 7.37mm)Height - Seated (Max)2Anuber of Terminations2Failure Rate-Failure Rate-<	Category	Resistors
SeriesRNXResistance100 MOhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal Oxide FilmFeaturesFlame Retardant Coating, High Voltage, SafetyOperating Temperature±100ppm/°COperating TemperatureAxialSupplier Device Package0.440" Dia x 0.290" L (3.56mm x 7.37mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Rate- <td></td> <td>Through Hole Resistors</td>		Through Hole Resistors
Resistance100 MOhmsTolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal Oxide FilmFeaturesFlame Retardant Coating, High Voltage, SafetyTemperature Coefficient±100pm/°COperating Temperature>55°C ~ 150°CPackage / CaseAxialSupplier Device Package0.140" Dia x 0.290" L (3.56mm x 7.37mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate-Failure Rate-	Package	Axial
Tolerance±1%Power (Watts)0.5W, 1/2WCompositionMetal Oxide FilmFeaturesFlame Retardant Coating, High Voltage, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 150°CPackage / CaseAxialSupplier Device Package0.140° Dia x 0.290° L (3.56mm x 7.37mm)Height - Seated (Max)-Number of Terminations2Failure Rate-Other Seated (Max)-State Seated (Max)-	Series	RNX
Power (Watts)0.5W, 1/2WCompositionMetal Oxide FilmFeaturesFlame Retardant Coating, High Voltage, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 150°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.140" Dia x 0.290" L (3.56mm x 7.37mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Resistance	100 MOhms
CompositionMetal Oxide FilmFeaturesFlame Retardant Coating, High Voltage, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 150°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.140" Dia x 0.290" L (3.56mm x 7.37mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Tolerance	$\pm 1\%$
FeaturesFlame Retardant Coating, High Voltage, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 150°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.140" Dia x 0.290" L (3.56mm x 7.37mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Power (Watts)	0.5W, 1/2W
Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 150°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.140" Dia x 0.290" L (3.56mm x 7.37mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Composition	Metal Oxide Film
Operating Temperature-55°C ~ 150°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.140" Dia x 0.290" L (3.56mm x 7.37mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Features	Flame Retardant Coating, High Voltage, Safety
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.140" Dia x 0.290" L (3.56mm x 7.37mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Temperature Coefficient	±100ppm/°C
Supplier Device PackageAxialSize / Dimension0.140" Dia x 0.290" L (3.56mm x 7.37mm)Height - Seated (Max)-Number of Terminations2Failure Rate-	Operating Temperature	-55°C ~ 150°C
Number of Terminations0.140" Dia x 0.290" L (3.56mm x 7.37mm)Failure Rate-Output-State-	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate-	Supplier Device Package	Axial
Number of Terminations2Failure Rate-	Size / Dimension	0.140" Dia x 0.290" L (3.56mm x 7.37mm)
Failure Rate -	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	-
		Report errors?

## **RNX025100MFKEE** Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

## **RNX025100MFKEE** Payment Methods





If you have any question about RNX025100MFKEE, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com