


ROX200100MFKEL

ROX200100MFKEL Information

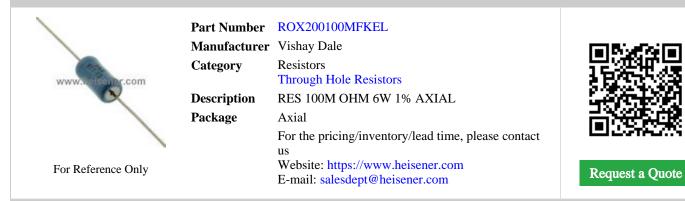

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



ROX200100MFKEL Specifications

| Manufacturer Part NumberROX200100/HKELManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsPackageAxialSeriesROXResistance100 MOhmsTolerance±1%Power (Watts)6WCompositionHeat Actiant Coating, High Voltage, SafetyFeatures100 ppm/°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.310" Dia x 2.050" L (7.87mm x 52.07mm)Height - Seated (Max)2Feature Rate1Feature Rate-Size / Dimension2Height - Seated (Max)-Feature Rate-Feature Rate-Size / Dimension-Height - Seated (Max)-Start Ferminations2Feature Rate-Feature Rate-Start Ferminations-Start Fermination | | |
|---|--------------------------|---|
| CategoryResistorsPackageAxialPackageAxialSeriesROXResistance100 MOhmsTolerance±1%Power (Watts)6WCompositionMetal Oxide FilmFeaturesFlame Retardant Coating, High Voltage, SafetyPoperating Temperature-55°C ~ 180°CPackage / CaseAxialSize / Dimension0.310" Dia x 2.050" L (7.87mm x 52.07mm)Height - Seated (Max)2Number of Terminations2Failure Rate-Failure Rate-F | Manufacturer Part Number | ROX200100MFKEL |
| Through Hole ResistorsPackageAxialSeriesROXResistance100 MOhmsTolerance±1%Power (Watts)6WCompositionMetal Oxide FilmFeaturesFlame Retardant Coating, High Voltage, SafetyPoperating Temperature-55°C ~ 180°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.310" Dia x 2.050" L (7.87mm x 52.07mm)Height + Seated (Max)2Failure Rate-Failure Rate- | Manufacturer | Vishay Dale |
| PackageAxialSeriesROXResistance100 MOhmsTolerance±1%Power (Watts)6WCompositionMetal Oxide FilmFeaturesFlame Retardant Coating, High Voltage, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 180°CPackage / CaseAxialSupplier Device Package0.310° Dia x 2.050° L (7.87mm x 52.07mm)Height - Seated (Max)2Aumber of Terminations2Failure Rate- | Category | Resistors |
| SeriesROXResistance100 MOhmsTolerance±1%Power (Watts)6WCompositionMetal Oxide FilmFeaturesFlame Retardant Coating, High Voltage, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 180°CPackage / CaseAxialSupplier Device Package0.310" Dia x 2.050" L (7.87mm x 52.07mm)Height - Seated (Max)2Failure Rate-Failure Rate-Failure Rate-Failure Rate- | | Through Hole Resistors |
| Resistance100 MOhmsTolerance±1%Power (Watts)6WCompositionMetal Oxide FilmFeaturesFlame Retardant Coating, High Voltage, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 180°CPackage / CaseAxialSupplier Device Package0.310" Dia x 2.050" L (7.87mm x 52.07mm)Height - Sated (Max)2Aumber of Terminations2Failure Rate-Failure Rate-State Maximum-State Maximum- | Package | Axial |
| Tolerance±1%Power (Watts)6WCompositionMetal Oxide FilmFeaturesFlame Retardant Coating, High Voltage, SafetyTemperature Coefficient±100pm/°COperating Temperature>55°C ~ 180°CPackage / CaseAxialSupplier Device Package0.310" Dia x 2.050" L (7.87mm x 52.07mm)Height - Seated (Max)2Number of Terminations2Failure Rate-Suppler Device Package-Start Of Terminations-Start Of Terminations- <t< td=""><td>Series</td><td>ROX</td></t<> | Series | ROX |
| Power (Watts)6WCompositionMetal Oxide FilmFeaturesFlame Retardant Coating, High Voltage, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 180°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.310" Dia x 2.050" L (7.87mm x 52.07mm)Height - Seated (Max)-Failure Rate2 | Resistance | 100 MOhms |
| CompositionMetal Oxide FilmFeaturesFlame Retardant Coating, High Voltage, SafetyTemperature Coefficient±100pm/°COperating Temperature-55°C ~ 180°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.310" Dia x 2.050" L (7.87mm x 52.07mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Tolerance | $\pm 1\%$ |
| FeaturesFlame Retardant Coating, High Voltage, SafetyTemperature Coefficient±100ppm/°COperating Temperature-55°C ~ 180°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.310" Dia x 2.050" L (7.87mm x 52.07mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Power (Watts) | 6W |
| Temperature Coefficient±100ppm/°COperating Temperature-55°C ~ 180°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.310" Dia x 2.050" L (7.87mm x 52.07mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Composition | Metal Oxide Film |
| Operating Temperature-55°C ~ 180°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.310" Dia x 2.050" L (7.87mm x 52.07mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Features | Flame Retardant Coating, High Voltage, Safety |
| Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.310" Dia x 2.050" L (7.87mm x 52.07mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Temperature Coefficient | ±100ppm/°C |
| Supplier Device PackageAxialSize / Dimension0.310" Dia x 2.050" L (7.87mm x 52.07mm)Height - Seated (Max)-Number of Terminations2Failure Rate- | Operating Temperature | $-55^{\circ}C \sim 180^{\circ}C$ |
| Number of Terminations0.310" Dia x 2.050" L (7.87mm x 52.07mm)Failure Rate-Output | Package / Case | Axial |
| Height - Seated (Max)-Number of Terminations2Failure Rate- | Supplier Device Package | Axial |
| Number of Terminations2Failure Rate- | Size / Dimension | 0.310" Dia x 2.050" L (7.87mm x 52.07mm) |
| Failure Rate - | Height - Seated (Max) | - |
| | Number of Terminations | 2 |
| Report errors? | Failure Rate | - |
| | | Report errors? |

ROX200100MFKEL Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

ROX200100MFKEL Payment Methods





If you have any question about ROX200100MFKEL, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com