


RWR81N24R9FSB12

RWR81N24R9FSB12 Information

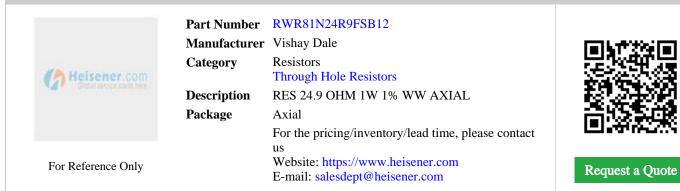

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



RWR81N24R9FSB12 Specifications

ManufacturerVishay DaleCategoryResistorsThrough Hole ResistorsPackageAxialSeriesMilitary, MIL-PRF-39007, RWR81NResistance24.9 OhmsTolerance±1%Power (Watts)IWCompositionWirewoundFeaturesMilitary, Moisture Resistant, Non-InductiveTemperature Coefficient±20ppm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.085" Dia x 0.250" L (2.16mm x 6.35mm)Height - Seated (Max)-Number of Terminations2		
CategoryResistorsPackageAxialPackageAxialSeriesMilitary, MIL-PRF-39007, RWR81NResistance24.9 OhmsTolerance±1%Power (Watts)IWCompositionWirewoundFeaturesMilitary, Moisture Resistant, Non-InductiveToleparture Coefficient±20ppm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device Package0.085" Dia x 0.250" L (2.16mm x 6.35mm)Size / Dimension2Number of Terminations2Failure RateS(0.001%)	Manufacturer Part Number	RWR81N24R9FSB12
Through Hole ResistorsPackageAxialPackageMilitary, MIL-PRF-39007, RWR81NSeries24.9 OhmsResistance24.9 OhmsTolerance±1%Power (Watts)IWCompositionWirewoundFeaturesMilitary, Moisture Resistant, Non-InductivePoperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.085" Dia x 0.250" L (2.16mm x 6.35mm)Height - Seated (Max)-Sundber of Terminations2Failure RateS (0.001%)	Manufacturer	Vishay Dale
PackageAxialSeriesMilitary, MIL-PRF-39007, RWR81NResistance24.9 OhmsTolerance±1%Power (Watts)IWCompositionWirewoundFeaturesMilitary, Moisture Resistant, Non-InductiveFeatures±20pm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device Package0.085" Dia x 0.250" L (2.16mm x 6.35mm)Height - Seated (Max)-Failure Rate\$ (0.001%)	Category	Resistors
SeriesMilitary, MIL-PRF-39007, RWR81NSeries24.9 OhmsResistance24.9 OhmsTolerance±1%Power (Watts)IWCompositionWirewoundFeaturesMilitary, Moisture Resistant, Non-InductiveFeatures±20pm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device Package0.085° Dia x 0.250° L (2.16mm x 6.35mm)Height - Seated (Max)-Failure Rate\$ (0.001%)		Through Hole Resistors
Resistance24.9 OhmsTolerance±1%Power (Watts)1WCompositionWirewoundFeaturesMilitary, Moisture Resistant, Non-InductiveTemperature Coefficient±20ppm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device Package0.085" Dia x 0.250" L (2.16mm x 6.35mm)Height - Seated (Max)-Number of Terminations2Failure Rate\$ (0.001%)	Package	Axial
Tolerance±1%Power (Watts)1WCompositionWirewoundCompositionMilitary, Moisture Resistant, Non-InductiveFeaturesMilitary, Moisture Resistant, Non-InductiveTemperature Coefficient±20ppm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device Package0.085" Dia x 0.250" L (2.16mm x 6.35mm)Height - Seated (Max)-Number of Terminations2Failure RateS (0.001%)	Series	Military, MIL-PRF-39007, RWR81N
Power (Watts)IWCompositionWirewoundFeaturesMilitary, Moisture Resistant, Non-InductiveTemperature Coefficient±20ppm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.085" Dia x 0.250" L (2.16mm x 6.35mm)Height - Seated (Max)-Number of Terminations2Failure RateS (0.001%)	Resistance	24.9 Ohms
CompositionWirewoundFeaturesMilitary, Moisture Resistant, Non-InductiveTemperature Coefficient±20pm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.085" Dia x 0.250" L (2.16mm x 6.35mm)Height - Seated (Max)-Number of Terminations2Failure RateS (0.001%)	Tolerance	$\pm 1\%$
FeaturesMilitary, Moisture Resistant, Non-InductiveTemperature Coefficient $\pm 20pm/^{\circ}C$ Operating Temperature $-55^{\circ}C \sim 250^{\circ}C$ Package / CaseAxialSupplier Device PackageAxialSize / Dimension $0.085"$ Dia x $0.250"$ L $(2.16mm x 6.35mm)$ Height - Seated (Max)-Number of Terminations2Failure RateS (0.001%)	Power (Watts)	1W
Temperature Coefficient±20ppm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.085" Dia x 0.250" L (2.16mm x 6.35mm)Height - Seated (Max)-Number of Terminations2Failure RateS (0.001%)	Composition	Wirewound
Operating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.085" Dia x 0.250" L (2.16mm x 6.35mm)Height - Seated (Max)-Number of Terminations2Failure RateS (0.001%)	Features	Military, Moisture Resistant, Non-Inductive
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.085" Dia x 0.250" L (2.16mm x 6.35mm)Height - Seated (Max)-Number of Terminations2Failure RateS (0.001%)	Temperature Coefficient	±20ppm/°C
Supplier Device PackageAxialSize / Dimension0.085" Dia x 0.250" L (2.16mm x 6.35mm)Height - Seated (Max)-Number of Terminations2Failure RateS (0.001%)	Operating Temperature	-55°C ~ 250°C
Size / Dimension0.085" Dia x 0.250" L (2.16mm x 6.35mm)Height - Seated (Max)-Number of Terminations2Failure RateS (0.001%)	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure Rate\$ (0.001%)	Supplier Device Package	Axial
Number of Terminations2Failure RateS (0.001%)	Size / Dimension	0.085" Dia x 0.250" L (2.16mm x 6.35mm)
Failure RateS (0.001%)	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	S (0.001%)
		Report errors?

RWR81N24R9FSB12 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

RWR81N24R9FSB12 Payment Methods





If you have any question about RWR81N24R9FSB12, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com