


RWR84N4870FPRSL

RWR84N4870FPRSL Information

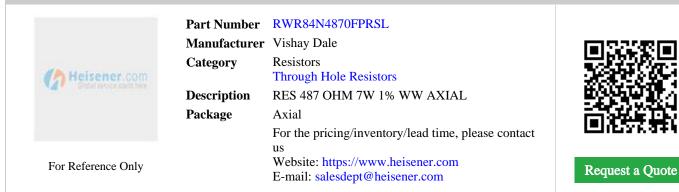

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



RWR84N4870FPRSL Specifications

Manufacturer Part Number RWR84N4870FPRSL Manufacturer Vishay Dale Category Resistors Package Axial Package Military, MIL-PRF-39007, RWR84N Resistance 487 Ohms Tolerance ±1% Power (Watts) 7W Composition Wiewound Features Military, Moisture Resistant, Non-Inductive Poper Age (Case Axial Stapp (Case Axial Stapp (Case Axial Stapp (Case Axial Number of Terminations 2 Pieght - Seated (Max) - Number of Terminations 2 Failure Rate P(0.1%)		
CategoryResistorsPackageAxialPackageMilitary, MIL-PRF-39007, RWR84NSeriesMilitary, MIL-PRF-39007, RWR84NResistance487 OhmsTolerance±1%Power (Watts)7WCompositionWirewoundFeaturesMilitary, Moisture Resistant, Non-InductivePenerature Coefficient±20pm/°COperating Temperature-55°C ~ 250°CSuppler Device PackageAxialSize / Dimension0.312" Dia x 0.875" L (7.92mm x 22.23mm)Height - Seated (Max)2Failure RateP(0.1%)	Manufacturer Part Number	RWR84N4870FPRSL
Through Hole ResistorsPackageAxialSeriesMilitary, MIL-PRF-39007, RWR84NResistance487 OhmsTolerance±1%Power (Wats)7WCompositionWirewoundFeaturesMilitary, Moisture Resistant, Non-InductiveTemperature Coefficient±20ppm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.312" Dia x 0.875" L (7.92mm x 22.23mm)Height - Seated (Max)-Number of Terminations2Failure RateP(0.1%)	Manufacturer	Vishay Dale
PackageAxiaSeriesMilitary, MIL-PRF-39007, RWR84NResistance487 OhmsTolerance±1%Power (Wats)7WCompositionWirewoundFeaturesMilitary, Moisture Resistant, Non-InductivePoperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device Package0.312" Dia x 0.875" L (7.92mm x 22.23mm)Height - Seated (Max)-Height - Seated (Max)P(0.1%)	Category	Resistors
NumberSeriesMilitary, MIL-PRF-39007, RWR84NResistance487 OhmsTolerance±1%Power (Watts)7WCompositionWirewoundFeaturesMilitary, Moisture Resistant, Non-InductivePoperature Coefficient±20pm/°COperating Temperature>55°C ~ 250°CPackage / CaseAxialSupplier Device Package0.312" Dia x 0.875" L (7.92mm x 22.23mm)Height - Seated (Max)2Aumber of Terminations2Failure RateP(0.1%)		Through Hole Resistors
Resistance487 OhmsTolerance±1%Power (Watts)7WCompositionWirewoundFeaturesMilitary, Moisture Resistant, Non-InductiveTemperature Coefficient±20pm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.312" Dia x 0.875" L (7.92mm x 22.23mm)Height - Seated (Max)-Number of Terminations2Failure RateP(0.1%)	Package	Axial
Tolerance±1%Power (Watts)7WCompositionWirewoundFeaturesMilitary, Moisture Resistant, Non-InductiveTemperature Coefficient±20pm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device Package0.312" Dia x 0.875" L (7.92mm x 22.23mm)Height - Seated (Max)-Number of Terminations2Failure RateP(0.1%)	Series	Military, MIL-PRF-39007, RWR84N
Power (Watts)7WCompositionWirewoundFeaturesMilitary, Moisture Resistant, Non-InductiveTemperature Coefficient±20pm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.312" Dia x 0.875" L (7.92mm x 22.23mm)Height - Seated (Max)-Failure RateP(0.1%)	Resistance	487 Ohms
CompositionWirewoundFeaturesMilitary, Moisture Resistant, Non-InductiveTemperature Coefficient±20pm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.312" Dia x 0.875" L (7.92mm x 22.23mm)Height - Seated (Max)-Number of Terminations2Failure RateP(0.1%)	Tolerance	$\pm 1\%$
FeaturesMilitary, Moisture Resistant, Non-InductiveTemperature Coefficient±20ppm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.312" Dia x 0.875" L (7.92mm x 22.23mm)Height - Seated (Max)-Number of Terminations2Failure RateP(0.1%)	Power (Watts)	7W
Temperature Coefficient±20ppm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.312" Dia x 0.875" L (7.92mm x 22.23mm)Height - Seated (Max)-Number of Terminations2Failure RateP(0.1%)	Composition	Wirewound
Operating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.312" Dia x 0.875" L (7.92mm x 22.23mm)Height - Seated (Max)-Number of Terminations2Failure RateP (0.1%)	Features	Military, Moisture Resistant, Non-Inductive
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.312" Dia x 0.875" L (7.92mm x 22.23mm)Height - Seated (Max)-Number of Terminations2Failure RateP (0.1%)	Temperature Coefficient	±20ppm/°C
Supplier Device PackageAxialSize / Dimension0.312" Dia x 0.875" L (7.92mm x 22.23mm)Height - Seated (Max)-Number of Terminations2Failure RateP (0.1%)	Operating Temperature	$-55^{\circ}C \sim 250^{\circ}C$
Number of Terminations0.312" Dia x 0.875" L (7.92mm x 22.23mm)Failure Rate0.312" Dia x 0.875" L (7.92mm x 22.23mm)Point-Point-Point2PointPointPointPoint	Package / Case	Axial
Height - Seated (Max)-Number of Terminations2Failure RateP (0.1%)	Supplier Device Package	Axial
Number of Terminations2Failure RateP (0.1%)	Size / Dimension	0.312" Dia x 0.875" L (7.92mm x 22.23mm)
Failure RateP (0.1%)	Height - Seated (Max)	-
	Number of Terminations	2
Report errors?	Failure Rate	P (0.1%)
		Report errors?

RWR84N4870FPRSL Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

RWR84N4870FPRSL Payment Methods





If you have any question about RWR84N4870FPRSL, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com