


RWR89SR100FMS70

RWR89SR100FMS70 Information

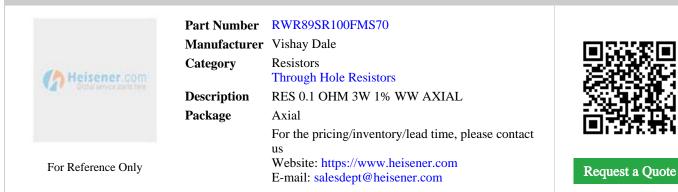

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



RWR89SR100FMS70 Specifications

Manufacturer Part Number RWR89SR100FMS70 Manufacturer Vishay Dale Category Resistors Through Hole Resistors Through Hole Resistors Package Axial Series Military, MIL-PRF-39007, RWR89S Resistance 100 mOhms Tolerance ±1% Power (Watts) 3W Composition Wirewound Features Military, Moisture Resistant Poperature Coefficient ±650pm/°C Opparating Temperature 55°C ~ 250°C Package / Case Axial Supplier Device Package Axial Size / Dimension 0.187" Dia x 0.560" L (4.75mm x 14.22mm) Height - Seated (Max) - Number of Terminations 2			
CategoryReformCategoryThrough Hole ResistorsPackageAxialPackageMilitary, MIL-PRF-39007, RWR89SSeries100 mOhmsResistance100 mOhmsTolerance±1%Power (Watts)3WCompositionWirewoundFeaturesMilitary, Moisture ResistantTemperature Coefficient±650pm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device Package0.187" Dia x 0.560" L (4.75mm x 14.22mm)Height - Seated (Max)-Number of Terminations2Failure RateMi(%)	Manufacturer Part Number	RWR89SR100FMS70	
Through Hole ResistorsPackageAxialSeriesMilitary, MIL-PRF-39007, RWR89SResistance100 mOhmsTolerance±1%Power (Watts)3WCompositionWirewoundFeaturesMilitary, Moisture ResistantTomperature Coefficient±650pm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.187" Dia x 0.560" L (4.75mm x 14.22mm)Height - Seated (Max)2Failure RateM(%)	Manufacturer	Vishay Dale	
PackageAxiaSeriesMilitary, MIL-PRF-39007, RWR89SResistance100 mOhmsTolerance±1%Power (Wats)3WCompositionWirewoundFeaturesMilitary, Moisture ResistantTemperature Coefficient±650pm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device Package0.187" Dia x 0.560" L (4.75mm x 14.22mm)Height - Seated (Max)2Aumber of Terminations2Failure RateM(1%)	Category	Resistors	
SeriesMiltary, MIL-PRF-39007, RWR89SResistance100 mOhmsTolerance±1%Power (Watts)3WCompositionWirewoundFeaturesMilitary, Moisture ResistantTemperature Coefficient±650pm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device Package0.187" Dia x 0.560" L (4.75mm x 14.22mm)Height - Seated (Max)2Anuber of Terminations2Failure RateM (1%)		Through Hole Resistors	
Resistance100 mOhmsTolerance±1%Power (Watts)3WCompositionWirewoundFeaturesMilitary, Moisture ResistantTemperature Coefficient±650ppm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device Package0.187" Dia x 0.560" L (4.75mm x 14.22mm)Height - Seated (Max)-Number of Terminations2Failure RateM(1%)	Package	Axial	
Tolerance±1%Power (Watts)3WCompositionWirewoundFeaturesMilitary, Moisture ResistantTemperature Coefficient±650pm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device Package0.187" Dia x 0.560" L (4.75mm x 14.22mm)Height - Seated (Max)-Number of Terminations2Failure RateM(1%)	Series	Military, MIL-PRF-39007, RWR89S	
Power (Watts)3WCompositionWirewoundFeaturesMilitary, Moisture ResistantTemperature Coefficient±650pm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.187" Dia x 0.560" L (4.75mm x 14.22mm)Height - Seated (Max)-Aruber of Terminations2Failure RateM(1%)	Resistance	100 mOhms	
CompositionWirewoundFeaturesMilitary, Moisture ResistantTemperature Coefficient±650pm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.187" Dia x 0.560" L (4.75mm x 14.22mm)Height - Seated (Max)-Number of Terminations2Failure RateM(1%)	Tolerance	$\pm 1\%$	
FeaturesMilitary, Moisture ResistantTemperature Coefficient $\pm 650 ppm/^{\circ}C$ Operating Temperature $-55^{\circ}C \sim 250^{\circ}C$ Package / CaseAxialSupplier Device PackageAxialSize / Dimension 0.187° Dia x 0.560° L $(4.75mm x 14.22mm)$ Height - Seated (Max) $-$ Number of Terminations 2 Failure RateMilitary, Moisture Resistant	Power (Watts)	3W	
Temperature Coefficient±650pm/°COperating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.187" Dia x 0.560" L (4.75mm x 14.22mm)Height - Seated (Max)-Number of Terminations2Failure RateM(1%)	Composition	Wirewound	
Operating Temperature-55°C ~ 250°CPackage / CaseAxialSupplier Device PackageAxialSize / Dimension0.187" Dia x 0.560" L (4.75mm x 14.22mm)Height - Seated (Max)-Number of Terminations2Failure RateM(1%)	Features	Military, Moisture Resistant	
Package / CaseAxialSupplier Device PackageAxialSize / Dimension0.187" Dia x 0.560" L (4.75mm x 14.22mm)Height - Seated (Max)-Number of Terminations2Failure RateM (1%)	Temperature Coefficient	±650ppm/°C	
Supplier Device PackageAxialSize / Dimension0.187" Dia x 0.560" L (4.75mm x 14.22mm)Height - Seated (Max)-Number of Terminations2Failure RateM (1%)	Operating Temperature	-55°C ~ 250°C	
Size / Dimension0.187" Dia x 0.560" L (4.75mm x 14.22mm)Height - Seated (Max)-Number of Terminations2Failure RateM (1%)	Package / Case	Axial	
Height - Seated (Max)-Number of Terminations2Failure RateM(1%)	Supplier Device Package	Axial	
Number of Terminations2Failure RateM (1%)	Size / Dimension	0.187" Dia x 0.560" L (4.75mm x 14.22mm)	
Failure RateM (1%)	Height - Seated (Max)	-	
	Number of Terminations	2	
Report errors?	Failure Rate	M (1%)	
Report circles.		Report error	rs?

RWR89SR100FMS70 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

RWR89SR100FMS70 Payment Methods



If you have any question about RWR89SR100FMS70, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com