


SA102A6R8DAR

SA102A6R8DAR Information



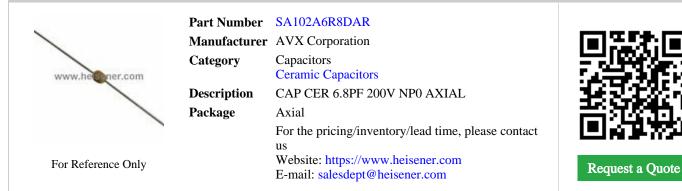

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SA102A6R8DAR Specifications

Manufacturer Part Number SA102A6R8DAR Manufacturer AVX Corporation Category Capacitors Package Axial Package SpinGuard? SA Capacitance 6.8pF Tolerance 40.5pF Voltage - Rated 200V Operating Temperature Coefficient COG, NPO Operating Temperature -55°C ~ 125°C Features - Applications General Purpose Applications General Purpose Mounting Type Through Hole Package / Case Axial Size / Dimension 0.100° Dia x 0.170° L (2.54mm x 4.32mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing - Lead Spacing -		
CategoryCapacitorsPackageAxialPackageAxialSeriesSpinGuard? SACapacitance6.8pFTolerance9.00VVoltage - Rated00VTomperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CPattings-55°C ~ 125°CRatings-6eneral PurposeApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSiz / Dimension0.100° Dia x 0.170° L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Spacing-Lead Style-	Manufacturer Part Number	SA102A6R8DAR
Caranic CapacitorsPackageAxialSeriesSpinGuard? SACapacitance6.8pFTolerance±0.5pFVoltage - RatedCOG, NPOOperating Temperature-55°C ~ 125°CPeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.100° Dia x 0.170° L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-Lead Style-	Manufacturer	AVX Corporation
PackageAxialSeriesSpinGuard? SACapacitance6.8pFTolerance±0.5pFVoltage - Rated200VTomperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.100" Dia x 0.170" L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-Style	Category	Capacitors
ArrowSpinGuard? SACapacitance6.8pFTolerance±0.5pFVoltage - Rated200VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Nounting TypeThrough HolePackage / CaseAxialSize / Dimension-Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-Styl		Ceramic Capacitors
Capacitance 6.8pF Tolerance ±0.5pF Voltage - Rated 200V Temperature Coefficient COG, NPO Operating Temperature -55°C ~ 125°C Features - Ratings - Applications General Purpose Failure Rate - Nounting Type Mail Size / Dimension 0.100" Dia x 0.170" L (2.54mm x 4.32mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing - Lead Style -	Package	Axial
Tolerance±0.5pFVoltage - Rated200VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / Case0.100" Dia x 0.170" L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-Lead Style-	Series	SpinGuard? SA
Voltage - Rated200VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeMouting HolePackage / CaseAxialSize / Dimension0.100° Dia x 0.170° L (2.54mm x 4.32mm)Height - Seated (Max)-Lead Spacing-Lead Style-Style-Lead Style-	Capacitance	6.8pF
Temperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.100° Dia x 0.170° L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° Dia Kolf Colf Colf Colf Colf Colf Colf Colf C	Tolerance	±0.5pF
Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.100" Dia x 0.170" L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" Dia X 0.170" L (2.54mm x 4.32mm)Lead Spacing-Start Space-Start Spac	Voltage - Rated	200V
Features-Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.100" Dia x 0.170" L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.100" Dia x 0.170" L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-State Style-State Style-State Style-State Style-State Style-Sty	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.100" Dia x 0.170" L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-State Style-	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.100" Dia x 0.170" L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-Height - Seated (Max)-Height - Seated (Max)-Height - Seated (Max)-State (Max)-Height - Seated (Max)- </td <td>Ratings</td> <td>-</td>	Ratings	-
Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.100" Dia x 0.170" L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-	Applications	General Purpose
Package / CaseAxialSize / Dimension0.100" Dia x 0.170" L (2.54mm x 4.32mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-	Failure Rate	-
Size / Dimension 0.100" Dia x 0.170" L (2.54mm x 4.32mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing - Lead Style -	Mounting Type	Through Hole
Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-	Package / Case	Axial
Thickness (Max)-Lead Spacing-Lead Style-	Size / Dimension	0.100" Dia x 0.170" L (2.54mm x 4.32mm)
Lead Spacing-Lead Style-	Height - Seated (Max)	-
Lead Style -	Thickness (Max)	-
	Lead Spacing	-
Report errors?	Lead Style	-
		Report errors?

SA102A6R8DAR Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SA102A6R8DAR Payment Methods



SA102A6R8DAR Shipping Methods



If you have any question about SA102A6R8DAR, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com