

SA12C Information



Part Number	SA12C
Manufacturer	Littelfuse Inc.
Category	Circuit Protection TVS - Diodes
Description	TVS DIODE 12VWM 20.9VC DO204AC
Package	DO-204AC, DO-15, Axial
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com
	E-mail: salesdept@heisener.com



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SA12C Specifications

Manufacturer Part NumberSA12CManufacturerLittelfuse Inc.CategoryCircuit ProtectionTVS - DiodesTVS - DiodesPackageDO-204AC, DO-15, AxialSeriesSATypeZenerUnidirectional Channels-Bidirectional Channels1Voltage - Reverse Standoff (Typ)12VVoltage - Breakdown (Min)2.64VVoltage - Clamping (Max) @ Ipp5.6APower - Peak Pulse (10/100µs)500WPower Line ProtectionNo
CategoryCircuit ProtectionTVS - DiodesPackageDO-204AC, DO-15, AxialSeriesSATypeZenerUnidirectional Channels-Bidirectional Channels1Voltage - Reverse Standoff (Typ)12VVoltage - Breakdown (Min)20.9VVoltage - Clamping (Max) @ Ipp20.9VCurrent - Peak Pulse500W
TVS - DiodesPackageDO-204AC, DO-15, AxialSeriesSATypeZenerUnidirectional Channels-Bidirectional Channels1Voltage - Reverse Standoff (Typ)12VVoltage - Breakdown (Min)12.6VVoltage - Clamping (Max) @ Ipp20.9VCurrent - Peak Pulse (10/1000µs)500W
PackageDO-204AC, DO-15, AxialSeriesSATypeZenerUnidirectional Channels-Bidirectional Channels1Voltage - Reverse Standoff (Typ)12VVoltage - Breakdown (Min)12.6VVoltage - Clamping (Max) @ Ipp20.9VCurrent - Peak Pulse (10/100µs)500W
Series SA Type Zener Unidirectional Channels - Bidirectional Channels 1 Voltage - Reverse Standoff (Typ) 12V Voltage - Breakdown (Min) 12.6V Voltage - Clamping (Max) @ Ipp 20.9V Current - Peak Pulse (10/1000µs) 55.6A Power - Peak Pulse 500W
TypeZenerUnidirectional Channels-Bidirectional Channels1Voltage - Reverse Standoff (Typ)12VVoltage - Breakdown (Min)12.6VVoltage - Clamping (Max) @ Ipp20.9VCurrent - Peak Pulse (10/1000µs)55.6APower - Peak Pulse500W
Unidirectional Channels-Bidirectional Channels1Voltage - Reverse Standoff (Typ)12VVoltage - Breakdown (Min)12.6VVoltage - Clamping (Max) @ Ipp20.9VCurrent - Peak Pulse (10/1000µs)55.6APower - Peak Pulse500W
Bidirectional Channels1Voltage - Reverse Standoff (Typ)12VVoltage - Breakdown (Min)12.6VVoltage - Clamping (Max) @ Ipp20.9VCurrent - Peak Pulse (10/1000µs)25.6APower - Peak Pulse500W
Voltage - Reverse Standoff (Typ)12VVoltage - Breakdown (Min)12.6VVoltage - Clamping (Max) @ Ipp20.9VCurrent - Peak Pulse (10/1000µs)25.6APower - Peak Pulse500W
Voltage - Breakdown (Min)12.6VVoltage - Clamping (Max) @ Ipp20.9VCurrent - Peak Pulse (10/1000µs)25.6APower - Peak Pulse500W
Voltage - Clamping (Max) @ Ipp 20.9V Current - Peak Pulse (10/1000µs) 25.6A Power - Peak Pulse 500W
Current - Peak Pulse (10/1000µs)25.6APower - Peak Pulse500W
Power - Peak Pulse 500W
Power Line Protection No.
rower Line Flotection No
Applications General Purpose
Capacitance @ Frequency -
Operating Temperature $-55^{\circ}C \sim 175^{\circ}C$ (TJ)
Mounting Type Through Hole
Package / Case DO-204AC, DO-15, Axial
Supplier Device PackageDO-204AC (DO-15)
Report e

SA12C Guarantees

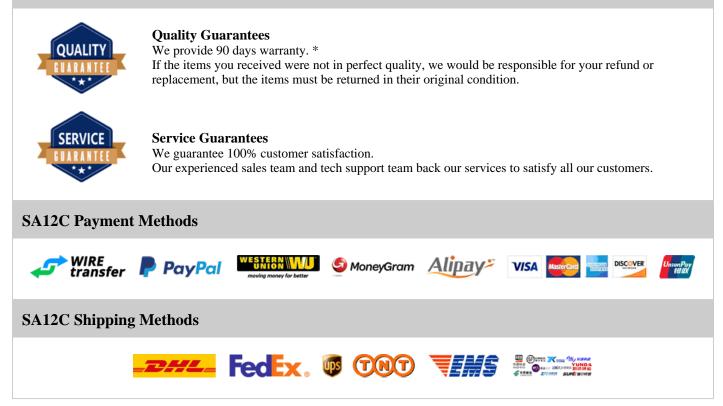

If you have any question about SA12C, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com