


SA305A472JAA

SA305A472JAA Information

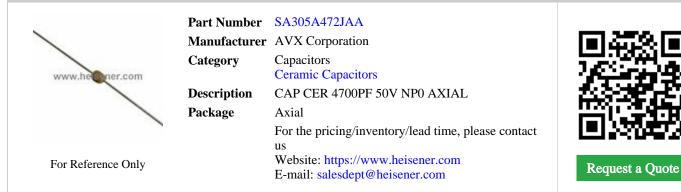

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SA305A472JAA Specifications

<table-row><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-container><table-row><table-row><table-row><table-container><table-container><table-container><table-row><table-row><table-row><table-container><table-container><table-container><table-row><table-row><table-row><table-row></table-row></table-row></table-row></table-row></table-container></table-container></table-container></table-row></table-row></table-row></table-container></table-container></table-container></table-row></table-row></table-row></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-container></table-row>		
CategoryCaranic CapacitorsPackageAxialSeriesAxialCapacitance4700pFCapacitance5%Yoltage - Rated5%Yoltage - Rated60G, NPOTemperature CoefficientCOG, NPOOperating Temperature-55° C ~ 125°CFeatures-55° C ~ 125°CFatures-60eral PuposeApplicationsGeneral PuposeFailure Rate-Mounting Type-10eral PuposeFackage / CaseAxialSize / Dimension1.50° Dia x 0.290° L (3.81mm x 7.37mm)Height - Seated (Max)-Height - Seated (Max)-Lead Spacing-Lead Spacing-Lead Style-Lead Style-	Manufacturer Part Number	SA305A472JAA
Indext and the second	Manufacturer	AVX Corporation
PackageAxialSeriesSpinGuard? SACapacitance4700pFTolerance±5%Voltage - Rated50VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeHrough HolePackage / Case0.150° Dia x 0.290° L (3.81mm x 7.37mm)Height - Seated (Max)-Hickness (Max)-Lead Spacing-Lead Style-Lead Style-	Category	Capacitors
SinGuard? SACapacitance4700pFTolerance±5%Voltage - Rated50%Temperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.150° Dia x 0.290° L (3.81mm x 7.37mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-<		Ceramic Capacitors
Capacitance4700pFTolerance±5%Voltage - Rated50VTemperature CoefficientCOG, NPOOperating Temperature-5°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.150° Dia x 0.290° L (3.81mm x 7.37mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Spacing-Lead Style-Star Dimension-Star Dimension<	Package	Axial
Tolerance±5%Voltage - Rated50VTemperature CoefficientC0G, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.150° Di ax 0.290° L (3.81mm x 7.37mm)Height - Seated (Max)-Lead Spacing-Lead Style-Lead Style-	Series	SpinGuard? SA
Voltage - Rated50VTemperature CoefficientC0G, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeHolePackage / CaseAxialSize / Dimension0.150° Dia x 0.290° L (3.81mm x 7.37mm)Height - Seated (Max)-Lead Spacing-Lead Spacing-Lead Style-Style-Lead Style-	Capacitance	4700pF
Temperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.150° Dia x 0.290° L (3.81mm x 7.37mm)Height - Seated (Max)-Fackage / Maxi-Lead Spacing-Lead Style-Style<	Tolerance	$\pm 5\%$
Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.150" Dia x 0.290" L (3.81mm x 7.37mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.150" Dia Colone of the sector of the se	Voltage - Rated	50V
Features-Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.150" Dia x 0.290" L (3.81mm x 7.37mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.150" Dia x 0.290" L (3.81mm x 7.37mm)Lead Style-	Temperature Coefficient	COG, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.150" Dia x 0.290" L (3.81mm x 7.37mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-Star (Style-Star (Style- <td>Operating Temperature</td> <td>-55°C ~ 125°C</td>	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.150" Dia x 0.290" L (3.81mm x 7.37mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-Output-Lead Style-	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.150" Dia x 0.290" L (3.81mm x 7.37mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-	Ratings	-
Mounting TypeThrough HolePackage / CaseAxialSize / Dimension0.150" Dia x 0.290" L (3.81mm x 7.37mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-	Applications	General Purpose
Package / CaseAxialSize / Dimension0.150" Dia x 0.290" L (3.81mm x 7.37mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-	Failure Rate	-
Size / Dimension0.150" Dia x 0.290" L (3.81mm x 7.37mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-	Mounting Type	Through Hole
Height - Seated (Max)-Thickness (Max)-Lead Spacing-Lead Style-	Package / Case	Axial
Thickness (Max)-Lead Spacing-Lead Style-	Size / Dimension	0.150" Dia x 0.290" L (3.81mm x 7.37mm)
Lead Spacing-Lead Style-	Height - Seated (Max)	-
Lead Style -	Thickness (Max)	-
	Lead Spacing	-
Report errors?	Lead Style	-
		Report errors?

SA305A472JAA Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SA305A472JAA Payment Methods



SA305A472JAA Shipping Methods



If you have any question about SA305A472JAA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com