

SFC-120-T2-L-D-A-K-TR

SFC-120-T2-L-D-A-K-TR Information





Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SFC-120-T2-L-D-A-K-TR Specifications

Manufacturer Part Number SFC-120-T2-L-D-A-K-TR Manufacturer Samtec Inc. Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series Tiger Eye? SFC Connector Type Receptacle Contact Type Board or Cable Style Board or Cable Number of Positions Loaded Al Number of Rows 2 Row Spacing - Mating 0.050° (1.27mm) Mounting Type Suface Mount Fastening Type Suface Mount Contact Finish - Mating Gold Contact Finish - Mating Gold Contact Finish Thickness - Mating Ipin (0.25µm) Insulation Color Black Insulation Height 0.180° (4.57mm) Insulation Height 0.180° (4.57mm)		
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series Tiger Eye? SFC Connector Type Receptacle Contact Type Female Socket Style Board to Board or Cable Number of Positions 40 Number of Positions Loaded All Number of Rows 2 Row Spacing - Mating 0.050" (1.27mm) Mounting Type Solder Yeare Mounting Solder Fermination Solder Contact Finish - Mating Gold Contact Finish Thickness - Mating Jupin (0.25µm) Sulation Color Black Insulation Fleight Jupin (0.25µm)	Manufacturer Part Number	SFC-120-T2-L-D-A-K-TR
Ackage . Series Tiger Eye? SFC Connector Type Receptacle Contact Type Female Socket Style Board to Board or Cable Number of Positions 40 Number of Positions Loaded All Pitch - Mating 0.050° (1.27mm) Number of Rows 2 Row Spacing - Mating 0.050° (1.27mm) Mounting Type Surface Mount Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating Jujin (0.25µm) Insulation Color Black Insulation Height 0.180° (4.57mm) Contact Length - Post - Operating Temperature -55°C ~ 125°C	Manufacturer	Samtec Inc.
Package-SeriesTigre Eye? SFCConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions40Number of Positions LoadedAllPitch - Mating0.050° (1.27mm)Number of Rows2Row Spacing - Mating0.050° (1.27mm)Mounting Type0.050° (1.27mm)Yenning TypeSolderFerminationSolderFortact Finish - MatingGoldContact Finish - MatingGoldContact Finish Thickness - MatingIloni (0.25µm)Insulation ColorIlackInsulation Height0.180° (4.57mm)Contact Length - Post-Solder Carter SolderSolderInsulation Height0.180° (4.57mm)Contact Length - Post-Solder Carter Solder-Solder Carter Solde	Category	Connectors, Interconnects
SeriesTiger Eye? SFCConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions40Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSolderTerminationSolderFastening TypeOddContact Finish - MatingGoldContact Finish - MatingIpin (0.25µm)Insulation ColorBlackInsulation Height0.180" (4.57mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions40Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.180" (4.57mm)Contact Length - Post-SolderSinger Schwarten	Package	-
Contact TypeFemale SocketStyleBoard to Board or CableNumber of Positions40Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.180" (4.57mm)Contact Length - Post-Specing Temperature55°C ~ 125°C	Series	Tiger Eye? SFC
StyleBoard to Board or CableNumber of Positions40Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.180" (4.57mm)Contact Length - Post-Operating Temperature-5°C ~ 125°C	Connector Type	Receptacle
Number of Positions40Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.180" (4.57mm)Contact Length - Post-Songer Carge Carg	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingIlpuin (0.25µm)Insulation ColorBlackInsulation Height0.180" (4.57mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Style	Board to Board or Cable
Pitch - Mating0.050" (1.27mm)Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.180" (4.57mm)Contact Length - Post-55°C ~ 125°C	Number of Positions	40
Number of Rows2Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.180" (4.57mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All
Row Spacing - Mating0.050" (1.27mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.180" (4.57mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.050" (1.27mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.180" (4.57mm)Contact Length - Post-Operating Temperature.55°C ~ 125°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.180" (4.57mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	0.050" (1.27mm)
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.180" (4.57mm)Contact Length - Post-Operating Temperature55°C ~ 125°C	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.180" (4.57mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Termination	Solder
Contact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlackInsulation Height0.180" (4.57mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.180" (4.57mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold
Insulation Height0.180" (4.57mm)Contact Length - Post-Operating Temperature-55°C ~ 125°C	Contact Finish Thickness - Mating	10µin (0.25µm)
Contact Length - Post-Operating Temperature-55°C ~ 125°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.180" (4.57mm)
	Contact Length - Post	-
	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating -	Material Flammability Rating	-

E-mail: salesdept@heisener.com

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	Board Guide, Pick and Place

Report errors?

SFC-120-T2-L-D-A-K-TR Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SFC-120-T2-L-D-A-K-TR Payment Methods

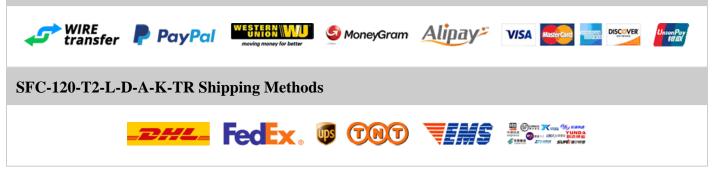

If you have any question about SFC-120-T2-L-D-A-K-TR, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com