


SIL05-1A85-76L4K

SIL05-1A85-76L4K Information

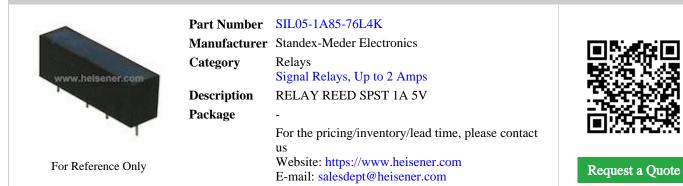

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SIL05-1A85-76L4K Specifications

CategoryRelaysCategorySignal Relays, Up to 2 AmpsPackage-PackageSIL HVRelay TypeRedCoil TypeNon LatchingCoil Quarent2.8mACoil VoltageSVDCContact FormSVDST-NO (1 Form A)Contact Rating (Current)14Switching Voltage3VDCTurn On Voltage (Max)3VDCCurrent0.5 VDCSuper Time1.1msRelease Time0.1msFeatures-		
CategoryRelaysPackage-Package-SeriesSIL HVRelay TypeReedCoil TypeNon LatchingCoil Current22.8mACoil VoltageSVDCContact FormSPST-NO (1 Form A)Contact Rating (Current)1ASwitching Voltage1000VAC, 1000VDC - MaxTurn ON Voltage (Max)3.VDCOperate Time0.5 VDCRelease Time0.1msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Manufacturer Part Number	SIL05-1A85-76L4K
Signal Relays, Up to 2 AmpsPackage-SeriesSIL HVRelay TypeReedCoil TypeNon LatchingCoil Current22.8mACoil VoltageSVDCContact FormSPST-NO (1 Form A)Contact Rating (Current)1ASwitching Voltage1000VAC, 1000VDC - MaxTurn On Voltage (Max)3 VDCOperate Time0.5 VDCRelease Time0.1msRelease Time-Mounting TypeThrough HoleTermination StylePC Pin	Manufacturer	Standex-Meder Electronics
Package-SeriesSIL HVRelay TypeReedCoil TypeNon LatchingCoil Current22.8mACoil VoltageSVDCContact FormSPST-NO (1 Form A)Contact Rating (Current)IASwitching Voltage (Max)3VDC - MaxTurn On Voltage (Max)3 VDCOperate Time0.5 VDCRelease Time0.1msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Category	Relays
SeriesSIL HVRelay TypeReedCoil TypeNon LatchingCoil Current22.8mACoil VoltageSVDCContact FormSPST-NO (1 Form A)Contact Rating (Current)ASwitching Voltage1000VAC, 1000VDC - MaxTurn On Voltage (Max)3 VDCTurn Off Voltage (Min)0.5 VDCOperate Time1.1msRelease Time0.1msFeatures-Mounting TypeThrough HoleTermination StylePC Pin		Signal Relays, Up to 2 Amps
Relay TypeReedCoil TypeNon LatchingCoil Current22.8mACoil VoltageSVDCContact FormSPST-NO (1 Form A)Contact Rating (Current)1ASwitching Voltage (Max)3 VDC - MaxTurn Of Voltage (Min)0.5 VDCOperate Time1.1msRelease Time0.1msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Package	-
Coil TypeNon LatchingCoil Current22.8mACoil Voltage5VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)1ASwitching Voltage1000VAC, 1000VDC - MaxTurn On Voltage (Max)3 VDCTurn Off Voltage (Min)0.5 VDCOperate Time1.1msRelease Time0.1msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Series	SIL HV
Coil Current22.8mACoil Voltage5VDCContact FormSPST-NO (1 Form A)Contact Form (Current)1ASwitching Voltage1000VAC, 1000VDC - MaxTurn On Voltage (Max)3 VDCTurn Off Voltage (Min)0.5 VDCOperate Time1.1msRelease Time0.1msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Relay Type	Reed
Coil Voltage5VDCContact FormSPST-NO (1 Form A)Contact Rating (Current)1ASwitching Voltage1000VAC, 1000VDC - MaxTurn On Voltage (Max)3 VDCTurn Off Voltage (Min)0.5 VDCOperate Time1.1msRelease Times0.1msFeatures-Mounting TypeThrough HolePremination StylePC Pin	Coil Type	Non Latching
Contact FormSPST-NO (1 Form A)Contact Rating (Current)1ASwitching Voltage1000VAC, 1000VDC - MaxTurn On Voltage (Max)3 VDCTurn Off Voltage (Min)0.5 VDCOperate Time1.1msRelease Time0.1msFeatures-Mounting TypeThrough HolePermination StylePC Pin	Coil Current	22.8mA
Contact Rating (Current)1ASwitching Voltage1000VAC, 1000VDC - MaxTurn On Voltage (Max)3 VDCTurn Off Voltage (Min)0.5 VDCOperate Time1.1msRelease Time0.1msFeatures-Mounting TypeThrough HolePremination StylePC Pin	Coil Voltage	5VDC
Switching Voltage1000VAC, 1000VDC - MaxTurn On Voltage (Max)3 VDCTurn Off Voltage (Min)0.5 VDCOperate Time1.1msRelease Time0.1msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Contact Form	SPST-NO (1 Form A)
Turn On Voltage (Max)3 VDCTurn Off Voltage (Min)0.5 VDCOperate Time1.1msRelease Time0.1msFeatures-Mounting TypeThrough HoleFermination StylePC Pin	Contact Rating (Current)	1A
Turn Off Voltage (Min)0.5 VDCOperate Time1.1msRelease Time0.1msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Switching Voltage	1000VAC, 1000VDC - Max
Operate Time1.1msRelease Time0.1msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Turn On Voltage (Max)	3 VDC
Release Time0.1msFeatures-Mounting TypeThrough HoleTermination StylePC Pin	Turn Off Voltage (Min)	0.5 VDC
Features-Mounting TypeThrough HoleTermination StylePC Pin	Operate Time	1.1ms
Mounting TypeThrough HoleTermination StylePC Pin	Release Time	0.1ms
Termination Style PC Pin	Features	-
-	Mounting Type	Through Hole
Report errors?	Termination Style	PC Pin
		Report errors?

SIL05-1A85-76L4K Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SIL05-1A85-76L4K Payment Methods



SIL05-1A85-76L4K Shipping Methods



If you have any question about SIL05-1A85-76L4K, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com