

SMDJ85

SMDJ85 Information



Part Number	SMDJ85
Manufacturer	Littelfuse Inc.
Category	Circuit Protection TVS - Diodes
Description	TVS DIODE 85VWM 143.85VC SMD
Package	DO-214AB, SMC
	For the pricing/inventory/lead time, please contact
	us
	Website: https://www.heisener.com
	E-mail: salesdept@heisener.com



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SMDJ85 Specifications

Manufacturer Litterfuse Inc. Category Circuit Protection TVS - Diodes TVS - Diodes Package DO-214AB, SMC Series SMDJ Type Zener Unidirectional Channels 1 Bidirectional Channels - Voltage - Reverse Standoff (Typ) 85V Voltage - Breakdown (Min) 89.28V Voltage - Clamping (Max) @ Ipp 143.85V Current - Peak Pulse (10/1000µS) 21.9A Power Line Protection No Applications General Purpose Capacitance @ Frequency - Operating Temperature - Package / Case Surface Mount Package / Case Surface Mount		
CategoryCircuit ProtectionTVS - DiodesPackageDO-214AB, SMCSeriesSMDJSpreesSMDJTypeZenerUnidirectional Channels1Bidirectional Channels-Voltage - Reverse Standoff (Typ)85VVoltage - Breakdown (Min)89.28VVoltage - Clamping (Max) @ Ipp143.85VCurrent - Peak Pulse (10/1000µs)21.9APower Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature65°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseDO-214AB, SMCSupplier Device PackageDO-214AB (SMCJ)	Manufacturer Part Number	SMDJ85
TVS - DiodesPackageDO-214AB, SMCSeriesSMDJTypeZenerUnidirectional Channels1Bidirectional Channels-Voltage - Reverse Standoff (Typ)85VVoltage - Breakdown (Min)89.28VVoltage - Clamping (Max) @ Ipp143.85VCurrent - Peak Pulse (10/1000µs)21.9APower - Peak Pulse3000W (3kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-65°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseDO-214AB, SMCSupplier Device PackageDO-214AB (SMCJ)	Manufacturer	Littelfuse Inc.
PackageDO-214AB, SMCSeriesSMDJTypeZenerUnidirectional Channels1Bidirectional Channels-Voltage - Reverse Standoff (Typ)85VVoltage - Breakdown (Min)89.28VVoltage - Clamping (Max) @ Ipp143.85VCurrent - Peak Pulse (10/1000µs)21.9APower - Peak Pulse3000W (3kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature65°C ~ 150°C (TJ)Mounting TypeDO-214AB, SMCPackage / CaseDO-214AB (SMCJ)	Category	Circuit Protection
SeriesSMDJTypeZenerUnidirectional Channels1Bidirectional Channels-Voltage - Reverse Standoff (Typ)85VVoltage - Breakdown (Min)89.28VVoltage - Clamping (Max) @ Ipp143.85VCurrent - Peak Pulse (10/1000µs)21.9APower - Peak Pulse3000W (3kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating TypeSurface MountPackage / CaseDO-214AB, SMCSupplier Device PackageDO-214AB (SMCJ)		TVS - Diodes
TypeZenerUndirectional Channels1Bidirectional Channels-Voltage - Reverse Standoff (Typ)85VVoltage - Breakdown (Min)89.28VVoltage - Clamping (Max) @ Ipp143.85VCurrent - Peak Pulse (10/1000µs)21.9APower - Peak Pulse3000W (3kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-50°C (TJ)Mounting TypeSurface MountPackage / CaseDO-214AB, SMCSupplier Device PackageDO-214AB (SMCJ)	Package	DO-214AB, SMC
Image: AntiperformanceImage: AntiperformanceUnidirectional Channels-Bidirectional Channels-Voltage - Reverse Standoff (Typ)85VVoltage - Breakdown (Min)89.28VVoltage - Clamping (Max) @ Ipp143.85VCurrent - Peak Pulse (10/1000µs)21.9APower - Peak Pulse (10/1000µs)3000W (3kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-65°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseDO-214AB, SMCSupplier Device PackageDO-214AB (SMCJ)	Series	SMDJ
Bidirectional Channels-Bidirectional Channels-Voltage - Reverse Standoff (Typ)85VVoltage - Breakdown (Min)89.28VVoltage - Clamping (Max) @ Ipp143.85VCurrent - Peak Pulse (10/1000µs)21.9APower - Peak Pulse (10/1000µs)3000W (3kW)Power - Peak Pulse3000W (3kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-65°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseDO-214AB, SMCSupplier Device PackageDO-214AB (SMCJ)	Туре	Zener
Voltage - Reverse Standoff (Typ)85VVoltage - Breakdown (Min)89.28VVoltage - Clamping (Max) @ Ipp143.85VCurrent - Peak Pulse (10/100µs)21.9APower - Peak Pulse3000W (3kW)Power - Peak PulseNoPower Line ProtectionGeneral PurposeApplicationsGeneral PurposeCapacitance @ Frequency-Operating TemperatureSurface MountMounting TypeSurface MountPackage / CaseDO-214AB, SMCSupplier Device PackageDO-214AB (SMCJ)	Unidirectional Channels	1
Voltage - Breakdown (Min)89.28VVoltage - Clamping (Max) @ Ipp143.85VCurrent - Peak Pulse (10/1000µs)21.9APower - Peak Pulse3000W (3kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-65°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseDO-214AB, SMCSupplier Device PackageDO-214AB (SMCJ)	Bidirectional Channels	-
Voltage - Clamping (Max) @ Ipp143.85VCurrent - Peak Pulse (10/1000µs)21.9APower - Peak Pulse3000W (3kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-65°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseDO-214AB, SMCCSupplier Device PackageDO-214AB (SMCJ)	Voltage - Reverse Standoff (Typ)	85V
Current - Peak Pulse (10/1000µs)21.9APower - Peak Pulse3000W (3kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-65°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseDO-214AB, SMCSupplier Device PackageDO-214AB (SMCJ)	Voltage - Breakdown (Min)	89.28V
Power - Peak Pulse3000W (3kW)Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-65°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseDO-214AB, SMCSupplier Device PackageDO-214AB (SMCJ)	Voltage - Clamping (Max) @ Ipp	143.85V
Power Line ProtectionNoApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-65°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseDO-214AB, SMCSupplier Device PackageDO-214AB (SMCJ)	Current - Peak Pulse (10/1000µs)	21.9A
ApplicationsGeneral PurposeCapacitance @ Frequency-Operating Temperature-65°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseDO-214AB, SMCSupplier Device PackageDO-214AB (SMCJ)	Power - Peak Pulse	3000W (3kW)
Capacitance @ Frequency-Operating Temperature-65°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseDO-214AB, SMCSupplier Device PackageDO-214AB (SMCJ)	Power Line Protection	No
Operating Temperature-65°C ~ 150°C (TJ)Mounting TypeSurface MountPackage / CaseDO-214AB, SMCSupplier Device PackageDO-214AB (SMCJ)	Applications	General Purpose
Mounting TypeSurface MountPackage / CaseDO-214AB, SMCSupplier Device PackageDO-214AB (SMCJ)	Capacitance @ Frequency	-
Package / CaseDO-214AB, SMCSupplier Device PackageDO-214AB (SMCJ)	Operating Temperature	-65°C ~ 150°C (TJ)
Supplier Device Package DO-214AB (SMCJ)	Mounting Type	Surface Mount
	Package / Case	DO-214AB, SMC
Report errors?	Supplier Device Package	DO-214AB (SMCJ)
		Report errors?

SMDJ85 Guarantees

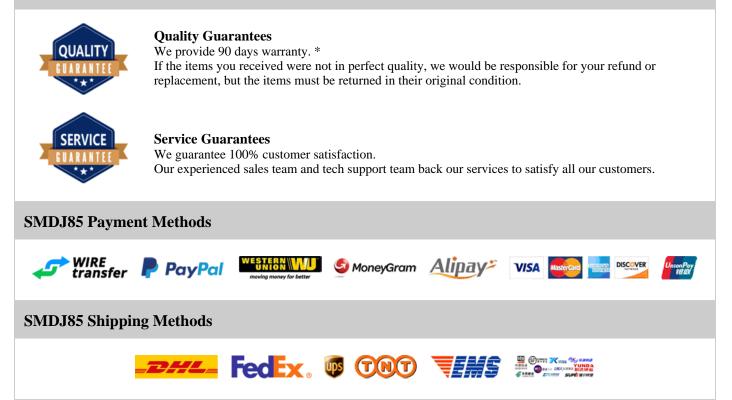

If you have any question about SMDJ85, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com