

# SMM-104-02-F-S

#### SMM-104-02-F-S Information



### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## SMM-104-02-F-S Specifications

Manufacturer Part NumberSMM-104-02-F-SManufacturerSamtee Inc.CategoryConnectors, InterconnectsPackage-SeriesTiger Eye? SMMConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions4Number of Rows1Number of Rows1Number of Rows1Number of RowsSufface MountTerminationSolderFastening TypeSufface MountContact Finish - MatingGoldContact Finish - MatingGoldSufface Finish Thickness - MatingJin (0.08µm)Insulation ColorBlackInsulation PositionJin (0.08µm)Contact Finish Thickness - MatingSife (126°C)Contact Length - PostSife (126°C)Contact Length - PostSife (126°C)		
CategoryConnectors InterconnectsPackage-SeriesTigr Eye? SMMConnector TypeRecetacleConnector TypeRecetacleConnector TypeRecetacleStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedNorgo "Connector Syne"Number of Rows1Number of Rows1Rowspacing AttingSolderNumber of RowsSolderStreining TypeSolderStreining TypeSolderStreining TypeSolderStreining TypeSolderStreining TypeSolderStreining Syne MattingSolderStreining Syne MattingSolder	Manufacturer Part Number	SMM-104-02-F-S
AckageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTiger Eye? SMMConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079° (2.00mm)Number of Rows1Row Spacing - MatingSufface MountMounting TypeSufface MountPriminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.140° (3.56mm)	Manufacturer	Samtec Inc.
Package-SeriesTiger Eye? SMMConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - MatingSurface MountForminationSulface MountFastening TypeSulface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Category	Connectors, Interconnects
SeriesTiger Eye? SMMConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - MatingSurface MountYourding TypeSurface MountFastening TypeOlderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypeQualContact Finish - MatingGoldContact Finish - MatingBiakInsulation ColorBlackInsulation Height0.140" (3.56mm)	Package	-
Contact TypeFemale SocketStyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountFastening TypeSolderContact Finish - MatingGoldInsulation ColorBiackInsulation Height0.140" (3.56mm)Contact Length - Post-	Series	Tiger Eye? SMM
StyleBoard to Board or CableNumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Connector Type	Receptacle
Yumber of Positions4Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJini (0.08µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingJin (0.08µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Number of Positions	4
Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.08µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Pitch - Mating	0.079" (2.00mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJµin (0.08µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.08µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Termination	Solder
Contact Finish Thickness - Mating3μin (0.08μm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Contact Finish - Mating	Gold
Insulation Height0.140" (3.56mm)Contact Length - Post-	Contact Finish Thickness - Mating	3μin (0.08μm)
Contact Length - Post -	Insulation Color	Black
-	Insulation Height	0.140" (3.56mm)
Operating Temperature $55\%$ $125\%$	Contact Length - Post	-
operating reinperature -55 C ~ 125 C	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

### SMM-104-02-F-S Guarantees



#### **Quality Guarantees**


We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

## SMM-104-02-F-S Payment Methods

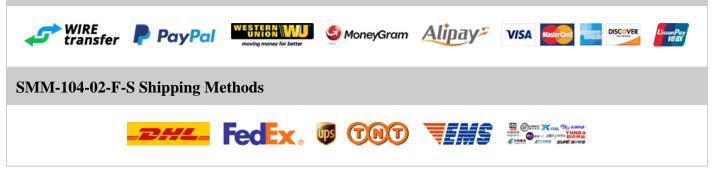

If you have any question about SMM-104-02-F-S, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com