

SMM-129-02-S-S

SMM-129-02-S-S Information

www.heisener.com	Part Number Manufacturer Category Description	SMM-129-02-S-S Samtec Inc. Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets CONN RCPT 2MM 29POS SGL GOLD SMD	
•	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact	
		Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SMM-129-02-S-S Specifications

Manufacturer Part NumberSMM-129-02-S-SManufacturerSamtec Inc.CategoryConnectors, InterconnectsPackage-SeriesTiger Eye? SMMConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions29Number of Rows1Number of Rows1Number of Rows1Number of RowsSufface MountTerminationSolderFastening TypeSufface MountContact Finish - MatingGoldContact Finish - MatingGoldSufface Finish Thickness - MatingGoldContact Finish - MatingJuin (0.76µm)Insulation ColorBlackContact Finish Thickness - MatingJuin (0.76µm)Contact Finish Thickness - MatingJuin (0.76µm)Contact Length - PostStiffer LEOCEContact Length - PostStiffer LEOCE		
CategoryConnectors InterconnectsPackage-SeriesTigr Eye? SMMConnector TypeRecetacleConnector TypeRecetacleConnector TypeRecetacleStyleBoard to Board or CableNumber of Positions9Number of Positions Loaded1Pich - Mating0.079° (.00mm)Number of Rows1Rowspacing - MatingSolderNumber of Positions0.16Number of Rows1Rowspacing - MatingSolderPositions TypeSolderStating TypeSolderContact Finish - MatingGoldContact Finish - MatingSolderInsulation ColorBackInsulation ColorSolderInsulation Finish - MatingSolderInsulation Finish - MatingSolder <td>Manufacturer Part Number</td> <td>SMM-129-02-S-S</td>	Manufacturer Part Number	SMM-129-02-S-S
Indext of the extended of the	Manufacturer	Samtec Inc.
Package-SeriesTiger Eye? SMMConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions29Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountFastening TypeSulface MountContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Category	Connectors, Interconnects
SeriesTiger Eye? SMMConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions29Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - MatingSurface MountYourding TypeSurface MountFastening TypeOlderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions29Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypeQuid ComponentContact Finish - MatingGoldContact Finish - MatingJupin (0.76µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Package	-
Contact TypeFemale SocketStyleBoard to Board or CableNumber of Positions29Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountFastening TypeSolderContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Series	Tiger Eye? SMM
StyleBoard to Board or CableNumber of Positions29Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Connector Type	Receptacle
Yumber of Positions29Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Style	Board to Board or Cable
Pitch - Mating0.079" (2.00mm)Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingJupin (0.76µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Number of Positions	29
Number of Rows1Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.76µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Number of Positions Loaded	All
Row Spacing - Mating-Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Pitch - Mating	0.079" (2.00mm)
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Number of Rows	1
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Row Spacing - Mating	-
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Mounting Type	Surface Mount
Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Termination	Solder
Contact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.140" (3.56mm)Contact Length - Post-	Contact Finish - Mating	Gold
Insulation Height0.140" (3.56mm)Contact Length - Post-	Contact Finish Thickness - Mating	30µin (0.76µm)
Contact Length - Post -	Insulation Color	Black
-	Insulation Height	0.140" (3.56mm)
C (T (1050C	Contact Length - Post	-
Operating Temperature -55°C ~ 125°C	Operating Temperature	-55°C ~ 125°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

SMM-129-02-S-S Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SMM-129-02-S-S Payment Methods

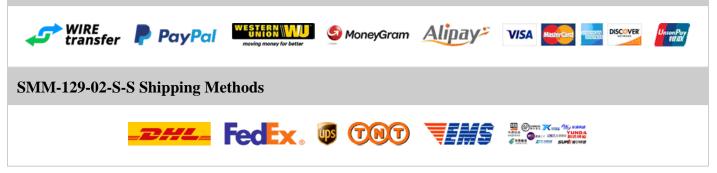

If you have any question about SMM-129-02-S-S, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com