


SR071A121JAA

SR071A121JAA Information

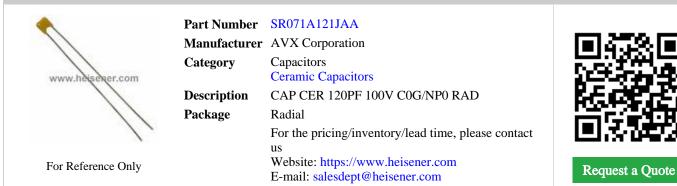

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SR071A121JAA Specifications

Manufacturer Part Number SR071A12IJAA Manufacturer AVX Corporation Category Capacitors Caranic Capacitors Caranic Capacitors Package Radial Series SkyCap? SR Capacitance ±5% Yoltage - Rated 100V Yoltage - Rated 000V Yoltage - Rated 000V <t< th=""><th>-</th><th></th></t<>	-	
CategoryCapacitorsPackageRadialSeriesSkyCap? SRCapacitance120pFTolerance±5%Voltage - Rated100VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Manufacturer Part Number	SR071A121JAA
Indext of the section of the sectio	Manufacturer	AVX Corporation
PackageRadialSeriesSkyCap? SRCapacitance120pFTolerance±5%Voltage - Rated100VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-ApplicationsGeneral PurposeFailure Rate-Mounting TypeSinog HolePackage / CaseAidialSize / Dimension.100° (2.54mm)Height - Seated (Max).100° (2.54mm)Fackage Japa.100° (2.54mm)Lead Spacing.100° (2.54mm)Lead StyleFormed Leads - Kinked	Category	Capacitors
SeriesSkyCap? SRCapacitance120pFTolerance±5%Voltage - Rated100VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked		Ceramic Capacitors
Capacitance 120pF Tolerance ±5% Voltage - Rated 100V Temperature Coefficient COG, NPO Operating Temperature -55°C ~ 125°C Features - Ratings - Applications General Purpose Failure Rate - Mounting Type Through Hole Size / Dimension 0.100" (2.54mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.100" (2.54mm) Lead Style Formed Leads - Kinked	Package	Radial
Tolerance±5%Voltage - Rated100VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRatialSize / Dimension0.100° (2.54mm) x 2.54mm)Height - Seated (Max)-Lead Spacing0.100° (2.54mm)Lead StyleFormed Leads - Kinked	Series	SkyCap? SR
Voltage - Rated100VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.100" (2.54mm) x 2.54mm)Height - Seated (Max)-Thickness (Max)0.100" (2.54mm)Lead SpacingFormed Leads - Kinked	Capacitance	120pF
Temperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Tolerance	±5%
Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81 mm x 2.54 mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54 mm)Lead StyleFormed Leads - Kinked	Voltage - Rated	100V
Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Applications	General Purpose
Package / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Failure Rate	-
Size / Dimension 0.150" L x 0.100" W (3.81mm x 2.54mm) Height - Seated (Max) 0.100" (2.54mm) Thickness (Max) - Lead Spacing 0.100" (2.54mm) Lead Style Formed Leads - Kinked	Mounting Type	Through Hole
Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Package / Case	Radial
Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Size / Dimension	0.150" L x 0.100" W (3.81mm x 2.54mm)
Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Height - Seated (Max)	0.100" (2.54mm)
Lead Style Formed Leads - Kinked	Thickness (Max)	-
	Lead Spacing	0.100" (2.54mm)
Report errors?	Lead Style	Formed Leads - Kinked
		Report errors?

SR071A121JAA Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SR071A121JAA Payment Methods



SR071A121JAA Shipping Methods



If you have any question about SR071A121JAA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com