


# SR072A330KAA

### SR072A330KAA Information

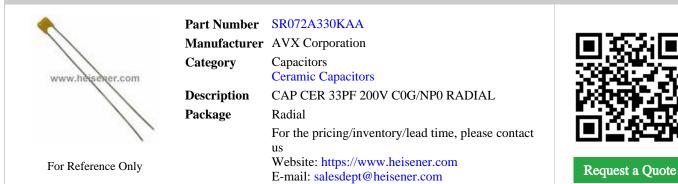

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# SR072A330KAA Specifications

Manufacturer Part NumberSR072A30KAAManufacturerAVX CorporationCategoryCapacitorsPackageRadialSeriesSkyCap? SRCapacitance±10%Yoltage - Rated200VYoltage - RatedCoG, NPOOperating Temperature-55°C ~ 125°CFatures-ApplicationsGeneralPurposeApplicationsGeneralPurposePatter Sate-Rating-ApplicationsGeneralPurposeFatures-ApplicationsGeneralPurposeFatures Acade-ApplicationsGiong NDFatures Acade-ApplicationsGiong NDFatures Acade-Package / CaseRadialFatures Acade-Fatures Acade-Package / CaseRadialFatures Acade-Fatures Acade-Package / Case-Fatures Acade-Fatures Acade		
CategoryCapacitorsPackageRadialPackageRadialSeriesSkyCap? SRCapacitance33pFTolerance±10%Voltage - Rated00VTomperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Artings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / Case.Size / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Height - Seated (Max)-Height Seated (Max)-Lead SpacingLo00° (2.54mm)Lead StyleFormed Leads - Kinked	Manufacturer Part Number	SR072A330KAA
Ceramic CapacitorsPackageRadialSeriesSkyCap? SRCapacitance33pFTolerance±10%Voltage - Rated200VTemperature CoefficientCOG, NP0Operating Temperature-5°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.100" (2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Manufacturer	AVX Corporation
PackageRadialSeriesSkyCap? SRCapacitance33pFTolerance10%Voltage - Rated200VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-ApplicationsGeneral PurposeFolduren Rate-Mounting Type-Package / CaseRadialSize / Dimension0.100° U.3.11mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleSormed Leads - Kinked	Category	Capacitors
Series SkyCap? SR   Capacitance 33pF   Tolerance ±10%   Voltage - Rated 200V   Temperature Coefficient COG, NP0   Operating Temperature -55°C ~ 125°C   Features -   Ratings -   Applications General Purpose   Failure Rate -   Mounting Type Through Hole   Size / Dimension 0.150" L x 0.100" W (3.81mm x 2.54mm)   Height - Seated (Max) -   Thickness (Max) -   Lead Spacing 0.100" (2.54mm)   Lead Style Formed Leads - Kinked		Ceramic Capacitors
Capacitance33 pFTolerance±10%Voltage - Rated200VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleFormed Leads - Kinked	Package	Radial
Tolerance±10%Voltage - Rated200VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRatialSize / Dimension0.100° (2.54mm) x 2.54mm)Height - Seated (Max)-Lead Spacing0.100° (2.54mm)Lead StyleFormed Leads - Kinked	Series	SkyCap? SR
Voltage - Rated200VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.100" (2.54mm) 2.54mm)Height - Seated (Max)-Thickness (Max)0.100" (2.54mm)Lead SpacingFormed Leads - Kinked	Capacitance	33pF
Temperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleFormed Leads - Kinked	Tolerance	±10%
Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Voltage - Rated	200V
Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Temperature Coefficient	COG, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Applications	General Purpose
Package / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Failure Rate	-
Size / Dimension 0.150" L x 0.100" W (3.81mm x 2.54mm)   Height - Seated (Max) 0.100" (2.54mm)   Thickness (Max) -   Lead Spacing 0.100" (2.54mm)   Lead Style Formed Leads - Kinked	Mounting Type	Through Hole
Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Package / Case	Radial
Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Size / Dimension	0.150" L x 0.100" W (3.81mm x 2.54mm)
Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Height - Seated (Max)	0.100" (2.54mm)
Lead Style Formed Leads - Kinked	Thickness (Max)	-
	Lead Spacing	0.100" (2.54mm)
Report errors?	Lead Style	Formed Leads - Kinked
		Report errors?

#### SR072A330KAA Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

# SERVICE EUARANTEE

#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

#### SR072A330KAA Payment Methods





If you have any question about SR072A330KAA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com