


SR072A680KAA

SR072A680KAA Information

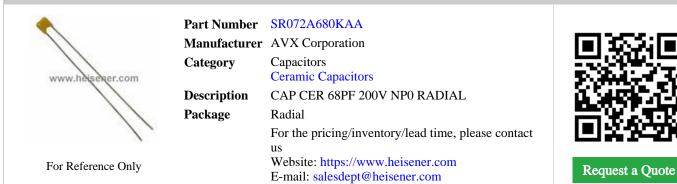

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SR072A680KAA Specifications

ManufacturerAVX CorporationCapacitorsPackageRadialPackageRadialSeriesSkyCap? SRCapacitance68pFTolerance±10%Voltage - Rated00VTomperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.100" (2.54mm)Height - Seated (Max)0.100" (2.54mm)Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked		
CapacitorsPackageRadialSeriesRadialCapacitanceSkyCap? SRCapacitance68pFTolerance±10%Voltage - Rated200VOperating Temperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CRatings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeGeneral PurposePackage / CaseRadialSize / Dimension0.100° (2.54mm)Height - Seated (Max)0.100° (2.54mm)Thickness (Max)6.Lead Spacing6.Lead StyleFormed Leads - Kinked	Manufacturer Part Number	SR072A680KAA
Caranic CapacitorsPackageRadialSeriesSkyCap? SRCapacitance68pFTolerance±10%Voltage - Rated200VComperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.100" (2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Manufacturer	AVX Corporation
PackageRadialSeriesSkyCap? SRCapacitance68pFTolerance±10%Voltage - Rated200VTomperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleFormed Leads - Kinked	Category	Capacitors
SeriesSkyCap? SRCapacitance68pFTolerance±10%Voltage - Rated200VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CPeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleFormed Leads - Kinked		Ceramic Capacitors
Capacitance 68pF Colerance ±10% Voltage - Rated 200V Temperature Coefficient COG, NPO Operating Temperature -55°C ~ 125°C Featuress - Ratings - Applications General Purpose Failure Rate - Mounting Type Hole Size / Dimension 0.100" (2.54mm) Height - Seated (Max) 0.100" (2.54mm) Lead Spacing 0.100" (2.54mm)	Package	Radial
Tolerance±10%Voltage - Rated200VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing6.100" (2.54mm)Lead StyleFormed Leads - Kinked	Series	SkyCap? SR
Voltage - Rated200VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.100" (2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Capacitance	68pF
Temperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)0.100" (2.54mm)Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Tolerance	$\pm 10\%$
Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Voltage - Rated	200V
Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Head StyleFormed Leads - Kinked	Temperature Coefficient	COG, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Applications	General Purpose
Package / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Failure Rate	-
Size / Dimension 0.150" L x 0.100" W (3.81mm x 2.54mm) Height - Seated (Max) 0.100" (2.54mm) Thickness (Max) - Lead Spacing 0.100" (2.54mm) Lead Style Formed Leads - Kinked	Mounting Type	Through Hole
Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Package / Case	Radial
Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Size / Dimension	0.150" L x 0.100" W (3.81mm x 2.54mm)
Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Height - Seated (Max)	0.100" (2.54mm)
Lead Style Formed Leads - Kinked	Thickness (Max)	-
	Lead Spacing	0.100" (2.54mm)
Report errors'	Lead Style	Formed Leads - Kinked
		Report errors?

SR072A680KAA Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SR072A680KAA Payment Methods





If you have any question about SR072A680KAA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com