


SR075C332KAA

SR075C332KAA Information

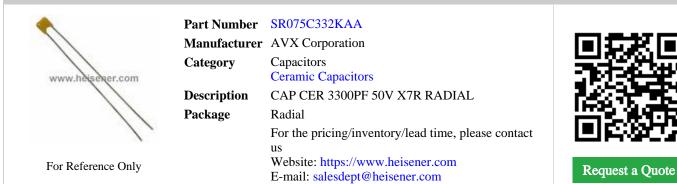

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SR075C332KAA Specifications

ManufacturerAVX CorporationCapacitorsCaranic CapacitorsPackageRadialSeriesSkyCap? SRCapacitance3300pFTolerance±10%Voltage - Rated50VTomperature Coefficient55°C ~ 125°CPactargs-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSiz / Dimension0.100° (2.54mm)Height - Seated (Max)0.100° (2.54mm)	-	
CapacitorsPackageRadialPackageRadialSeriesSkyCap? SRCapacitance3300pFTolerance±10%Voltage - Rated50VOperating Temperature CoefficientX7ROperating Temperature-55°C ~ 125°CPatters-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.100° U (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° L 54mm)Lead SyleFormed Leads - Kinked	Manufacturer Part Number	SR075C332KAA
Ceramic CapacitorsPackageRadialSeriesSkyCap? SRCapacitance3300pFTolerance±10%Voltage - Rated50VTemperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.100" (2.54mm)Height - Seated (Max)-Thickness (Max)-Lead SpacingFormed Leads - Kinked	Manufacturer	AVX Corporation
PackageRadialSeriesSkyCap? SRCapacitance3300pFTolerance±10%Voltage - Rated50VTomperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing6.100° (2.54mm)Lead StyleFormed Leads - Kinked	Category	Capacitors
Series SkyCap? SR Capacitance 3300pF Tolerance ±10% Voltage - Rated 50V Temperature Coefficient X7R Operating Temperature -55°C ~ 125°C Features - Ratings - Applications General Purpose Failure Rate - Nounting Type Through Hole Package / Case Radial Size / Dimension 0.100" (2.54mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.100" (2.54mm) Lead Style Formed Leads - Kinked		Ceramic Capacitors
Capacitance3300pFTolerance±10%Voltage - Rated50VTemperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.100" (2.54mm)Height - Seated (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Package	Radial
Tolerance±10%Voltage - Rated50VTemperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeHolePackage / CaseRatinalSize / Dimension0.100° (2.54mm) x 2.54mm)Height - Seated (Max)-Hickness (Max)-Lead StyleGomena Leads - Kinked	Series	SkyCap? SR
Voltage - Rated50VTemperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.100" (2.54mm) (2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Capacitance	3300pF
Temperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Tolerance	±10%
Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81 mm x 2.54 mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54 mm)Lead StyleFormed Leads - Kinked	Voltage - Rated	50V
Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Temperature Coefficient	X7R
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead SyleFormed Leads - Kinked	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Applications	General Purpose
Package / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Failure Rate	-
Size / Dimension 0.150" L x 0.100" W (3.81mm x 2.54mm) Height - Seated (Max) 0.100" (2.54mm) Thickness (Max) - Lead Spacing 0.100" (2.54mm) Lead Style Formed Leads - Kinked	Mounting Type	Through Hole
Height - Seated (Max)0.100" (2.54mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Package / Case	Radial
Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Size / Dimension	0.150" L x 0.100" W (3.81mm x 2.54mm)
Lead Spacing0.100" (2.54mm)Lead StyleFormed Leads - Kinked	Height - Seated (Max)	0.100" (2.54mm)
Lead Style Formed Leads - Kinked	Thickness (Max)	-
	Lead Spacing	0.100" (2.54mm)
Report errors?	Lead Style	Formed Leads - Kinked
		Report errors?

SR075C332KAA Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE EUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SR075C332KAA Payment Methods





If you have any question about SR075C332KAA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com