


SR151A101JARAP2

SR151A101JARAP2 Information

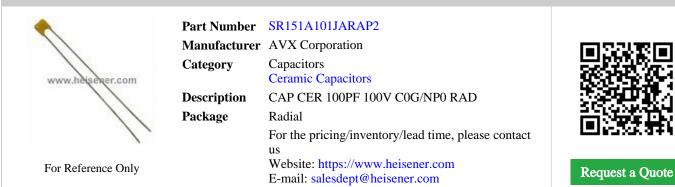

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SR151A101JARAP2 Specifications

Manufacturer Part Number SR151A101JARAP2 Manufacturer AVX Corporation Capacitors Capacitors Package Radial Series SkyCap? SR Capacitance 100pF Tolerance ±5% Voltage - Rated 000 V Operating Ceneficient 006, NPO Operating Temperature 05% C + 125 °C Pactage . Applications General Purpose Applications General Purpose Faiture Rate . Mounting Type Mounding Type Package / Case Radial Size / Dimension 1.50° C + 1.50° C Pactage Age . Pather Sate (Max) General Purpose Applications General Purpose Package / Case Radial Size / Dimension Instoy I K 0.010° W (3.81mm x 2.54mm) Height - Seated (Max) . Thickness (Max) . Lead Spacing Mounting Tupe Lead Spacing Mino (2.54mm) <		
CapacitorsPackageRadialSeriesRadialCapacitanceSkyCap? SRCapacitance100pFTolerance±5%Voltage - Rated100VTomperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CRatings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100° W(3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleSize jam	Manufacturer Part Number	SR151A101JARAP2
Ceranic CapacitorsPackageRadialSeriesSkyCap? SRCapacitance100pFTolerance±5%Voltage - Rated100VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStraight	Manufacturer	AVX Corporation
PackageRadialSeriesSkyCap? SRCapacitance100pFTolerance±5%Voltage - Rated100VComperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension.150° L x 0.100° W (3.81mm x 2.54mm)Fickness (Max).150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max).150° (3.81mm)Fickness (Max).100° (2.54mm)Lead SpacingMinghtLead StyleStraight	Category	Capacitors
ArrowSkyCap? SRCapacitance100pFTolerance±5%Voltage - Rated100VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight		Ceramic Capacitors
CapacitanceOrCapacitance±5%Tolerance±5%Voltage - Rated100VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStraight	Package	Radial
Tolerance±5%Voltage - Rated100VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead StyleSinght	Series	SkyCap? SR
Voltage - Rated100VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFolure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)0.100° (2.54mm)Lead SpacingStraightKating Lead StyleStraight	Capacitance	100pF
Temperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)0.100° (2.54mm)Lead SpacingStraight	Tolerance	$\pm 5\%$
Operating Temperature.55°C ~ 125°CFeatures.Ratings.ApplicationsGeneral PurposeFailure Rate.Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81 mm x 2.54 mm)Height - Seated (Max).Thickness (Max).Lead Spacing0.100" (2.54 mm)Kead StyleStraight	Voltage - Rated	100V
Features-Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)0.100" (2.54mm)Lead Spacing0.100" (2.54mm)Kate State (Max)0.100" (2.54mm)	Features	-
Failure Rate-Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Applications	General Purpose
Package / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Failure Rate	-
Size / Dimension 0.150" L x 0.100" W (3.81mm x 2.54mm) Height - Seated (Max) 0.150" (3.81mm) Thickness (Max) - Lead Spacing 0.100" (2.54mm) Lead Style Straight	Mounting Type	Through Hole
Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Package / Case	Radial
Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Size / Dimension	0.150" L x 0.100" W (3.81mm x 2.54mm)
Lead Spacing0.100" (2.54mm)Lead StyleStraight	Height - Seated (Max)	0.150" (3.81mm)
Lead Style Straight	Thickness (Max)	-
	Lead Spacing	0.100" (2.54mm)
Report errors?	Lead Style	Straight
		Report errors?

SR151A101JARAP2 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DISCOVER

SR151A101JARAP2 Payment Methods



SR151A101JARAP2 Shipping Methods



If you have any question about SR151A101JARAP2, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com