


SR151A251JAA

SR151A251JAA Information

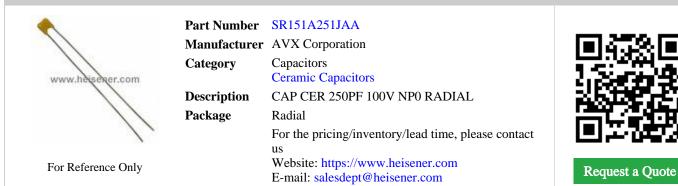

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SR151A251JAA Specifications

Manufacturer Part NumberSR151A251JAAManufacturerAVX CorporationCategoryCapacitorsPackageRadialSeriesSkyCap? SRCapacitance250pFYoltage - Rated100VYoltage - Rated000 NPOperating Temperaturecoff Coff Coff Coff Coff Coff Coff Coff	-	
CategoryCapacitorsPackageRadialSeriesSkyCap? SRCapacitance250pFColerance±5%Voltage - Rated100VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSiz / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStraight	Manufacturer Part Number	SR151A251JAA
Ceranic CapacitorsPackageRadialSeriesSkyCap? SRCapacitance250pFTolerance±5%Voltage - Rated100VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSiz / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStraight	Manufacturer	AVX Corporation
PackageRadialSeriesSkyCap? SRCapacitance250pFTolerance±5%Voltage - Rated100VComperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeShog HolePackage / CaseRadialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStraight	Category	Capacitors
SeriesSkyCap? SRCapacitance250pFTolerance±5%Voltage - Rated100VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight		Ceramic Capacitors
Capacitance 250F Tolerance ±5% Voltage - Rated 100V Temperature Coefficient COG, NPO Operating Temperature -55°C ~ 125°C Features - Ratings - Applications General Purpose Failure Rate - Mounting Type Through Hole Size / Dimension 0.150" L x 0.100" W (3.81mm x 2.54mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.100" (2.54mm) Lead Style Straight	Package	Radial
Tolerance±5%Voltage - Rated100VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStraight	Series	SkyCap? SR
Voltage - Rated100VTemperature CoefficientC0G, NP0Operating Temperature-5°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Capacitance	250pF
Temperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)0.100° (2.54mm)Lead SpacingStraight	Tolerance	±5%
Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Kead StyleStraight	Voltage - Rated	100V
Features-Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Features	-
Failure Rate-Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Applications	General Purpose
Package / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Failure Rate	-
Size / Dimension 0.150" L x 0.100" W (3.81mm x 2.54mm) Height - Seated (Max) 0.150" (3.81mm) Thickness (Max) - Lead Spacing 0.100" (2.54mm) Lead Style Straight	Mounting Type	Through Hole
Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Package / Case	Radial
Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Size / Dimension	0.150" L x 0.100" W (3.81mm x 2.54mm)
Lead Spacing0.100" (2.54mm)Lead StyleStraight	Height - Seated (Max)	0.150" (3.81mm)
Lead Style Straight	Thickness (Max)	-
	Lead Spacing	0.100" (2.54mm)
Report errors?	Lead Style	Straight
		Report errors?

SR151A251JAA Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SR151A251JAA Payment Methods



SR151A251JAA Shipping Methods



If you have any question about SR151A251JAA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com