


# SR151C222MAATR1

## SR151C222MAATR1 Information

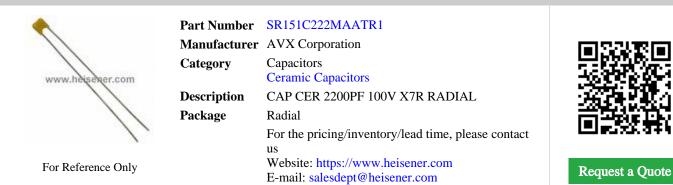

### **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# SR151C222MAATR1 Specifications

Manufacturer Part Number   SR151C222MAATR1     Manufacturer   AVX Corporation     Capacitors   Capacitors     Package   Radial     Series   StyCap? SR     Capacitance   2200pF     Tolerance   ±20%     Voltage - Rated   00V     Operating Temperature Coefficient   07     Packags   -     Strings   -     Applications   General Purpose     Features   -     Applications   General Purpose     Failure Rate   -     Mounting Type   Through Hole     Volze / Case   Radial     Size / Dimension   0.50° (3.81mm)     Height - Seated (Max)   -     Thickness (Max)   -     Lead Spacing   0.100° (2.54mm)		
CategoryCapacitorsPackageRadialSeriesRadialCapacitanceSkyCap? SRCapacitance200pFTolerance±20%Voltage - Rated100VTomperature CoefficientSrROperating Temperature-55°C ~ 125°CPactangs-61000000000000000000000000000000000000	Manufacturer Part Number	SR151C222MAATR1
Ceranic CapacitorsPackageRadialSeriesSkyCap? SRCapacitance200pFTolerance±20%Voltage - Rated100VTemperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStraight	Manufacturer	AVX Corporation
PackageRadialSeriesSkyCap? SRCapacitance200pFTolerance±20%Voltage - Rated100VTemperature CoefficientX7ROperating Temperature-5°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Nounting TypeShore AlagPackage / CaseRadialSize / Dimension.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max).100° (2.54mm)Lead SpacingStraight	Category	Capacitors
Series   SkyCap? SR     Capacitance   2200pF     Tolerance   ±20%     Voltage - Rated   100V     Temperature Coefficient   X7R     Operating Temperature   -55°C ~ 125°C     Features   -     Ratings   -     Applications   General Purpose     Mounting Type   Through Hole     Size / Dimension   0.150° L x 0.100° W (3.81mm x 2.54mm)     Height - Seated (Max)   -     Thickness (Max)   -     Lead Spacing   0.100° (2.54mm)     Lead Style   Straight		Ceramic Capacitors
Capacitance200pFTolerance±20%Voltage - Rated100VTemperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Package	Radial
Tolerance±20%Voltage - Rated100VTemperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Series	SkyCap? SR
Voltage - Rated100VTemperature CoefficientX7ROperating Temperature-5°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Capacitance	2200pF
Temperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)0.100" (2.54mm)Lead SpacingStraight	Tolerance	±20%
Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81 mm x 2.54 mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54 mm)Kead StyleStraight	Voltage - Rated	100V
Features-Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Temperature Coefficient	X7R
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Kead StyleStraight	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)0.100" (2.54mm)Lead Spacing0.100" (2.54mm)Kead StyleStraight	Features	-
Failure Rate-Foilure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Applications	General Purpose
Package / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Failure Rate	-
Size / Dimension 0.150" L x 0.100" W (3.81mm x 2.54mm)   Height - Seated (Max) 0.150" (3.81mm)   Thickness (Max) -   Lead Spacing 0.100" (2.54mm)   Lead Style Straight	Mounting Type	Through Hole
Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Package / Case	Radial
Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Size / Dimension	0.150" L x 0.100" W (3.81mm x 2.54mm)
Lead Spacing0.100" (2.54mm)Lead StyleStraight	Height - Seated (Max)	0.150" (3.81mm)
Lead Style Straight	Thickness (Max)	-
· · · · · · · · · · · · · · · · · · ·	Lead Spacing	0.100" (2.54mm)
Report errors?	Lead Style	Straight
		Report errors?

#### SR151C222MAATR1 Guarantees



**Quality Guarantees** 

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

S MoneyGram Alipay VISA

DISCOVER

#### SR151C222MAATR1 Payment Methods



# SR151C222MAATR1 Shipping Methods



If you have any question about SR151C222MAATR1, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com

 $\Lambda/U$