


SR152A121JAR

SR152A121JAR Information

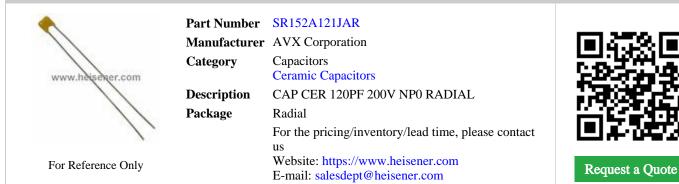

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SR152A121JAR Specifications

Manufacturer Part Number SR 152A12IJAR Manufacturer AVX Corporation Category Capacitors Caranic Capacitors Caranic Capacitors Package Radial Series SkyCap? SR Capacitance ±5% Yoltage - Rated 200V Tolerance coefficient C0G, NPO Operating Temperature 55°C ~ 125°C Features - Applications General Purpose Applications General Purpose Failure Rate - Mounting Type Through Hole Stez / Dimension 0.50° L x 0.100° W (3.81mm x 2.54mm) Failures (Max) 0.50° (3.81mm) Failure Steate (Max) 0.100° (2.54mm)	-	
CategoryCapacitorsPackageRadialSeriesSkyCap? SRCapacitance120pFTolerance±5%Voltage - Rated200VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Manufacturer Part Number	SR152A121JAR
Indext of the section of the sectio	Manufacturer	AVX Corporation
PackageRadialSeriesSkyCap? SRCapacitance120pFTolerance±5%Voltage - Rated200VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-ApplicationsGeneral PurposeFolduren Rate-Mounting TypeGeneral PurposePackage / CaseRadialSize / Dimension.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max).150° (3.81mm)Fickness (Max).150° (3.81mm)Fickness (Max).100° (2.54mm)Lead SpacingMinghtLead StyleStraight	Category	Capacitors
Series SkyCap? SR Capacitance 120pF Tolerance ±5% Voltage - Rated 200V Temperature Coefficient C0G, NP0 Operating Temperature -55°C ~ 125°C Features - Ratings - Applications General Purpose Failure Rate - Mounting Type Through Hole Size / Dimension 0.150" L x 0.100" W (3.81mm x 2.54mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.100" (2.54mm) Lead Style Straight		Ceramic Capacitors
Capacitance 120F Tolerance ±5% Voltage - Rated 200V Temperature Coefficient COG, NPO Operating Temperature -55°C ~ 125°C Features - Ratings - Applications General Purpose Failure Rate - Mounting Type Through Hole Size / Dimension 0.150" L x 0.100" W (3.81mm x 2.54mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.100" (2.54mm) Lead Style Straight	Package	Radial
Tolerance±5%Voltage - Rated200VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRatialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStraight	Series	SkyCap? SR
Voltage - Rated200VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)0.100" (2.54mm)Lead SpacingStraight	Capacitance	120pF
Temperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Tolerance	±5%
Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Voltage - Rated	200V
Features-Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Applications	General Purpose
Package / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Failure Rate	-
Size / Dimension 0.150" L x 0.100" W (3.81mm x 2.54mm) Height - Seated (Max) 0.150" (3.81mm) Thickness (Max) - Lead Spacing 0.100" (2.54mm) Lead Style Straight	Mounting Type	Through Hole
Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Package / Case	Radial
Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Size / Dimension	0.150" L x 0.100" W (3.81mm x 2.54mm)
Lead Spacing0.100" (2.54mm)Lead StyleStraight	Height - Seated (Max)	0.150" (3.81mm)
Lead Style Straight	Thickness (Max)	-
	Lead Spacing	0.100" (2.54mm)
Report errors?	Lead Style	Straight
		Report errors?

SR152A121JAR Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SR152A121JAR Payment Methods



SR152A121JAR Shipping Methods



If you have any question about SR152A121JAR, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com