


SR152A330JAAAP1

SR152A330JAAAP1 Information

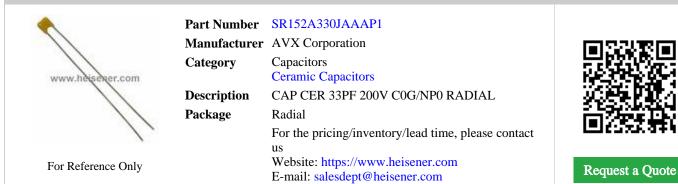

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SR152A330JAAAP1 Specifications

Manufacturer Part Number SR 152A30JAAAP1 Manufacturer AVX Corporation Capacitors Capacitors Ceramic Capacitors Radial Package Radial Stries StyCap? SR Capacitance 33pF Yoltage - Rated 200V Operating Temperature Coefficient 00G, NPO Operating Temperature - Strigs - Applications General Purpose Applications General Purpose Faiture Rate - Mounting Type Through Hole Strig / Dimension 0.150° L x 0.100° W (3.81mm x 2.54mm) Height - Seated (Max) - Thickness (Max) - Strig / Dimension - Lead Spacing - Lead Spacing - Strig / Dimension 0.150° L X 0.100° W (3.81mm x 2.54mm) Height - Seated (Max) - Strig / Dimension - Lead Spacing - Lead Spacing - Le		
CapacitorsPackageRadialSeriesRadialCapacitanceSkyCap? SRCapacitance33pFTolerance±5%Voltage - Rated00VTomperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CRatings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSiz / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Fickness (Max)-Height - Seated (Max)-Height	Manufacturer Part Number	SR152A330JAAAP1
Ceranic CapacitorsPackageRadialSeriesSkyCap? SRCapacitance33pFTolerance±5%Voltage - Rated200VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStraight	Manufacturer	AVX Corporation
PackageRadialSeriesSkyCap? SRCapacitance33pFTolerance±5%Voltage Rated200VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Noutring TypeThrough HoleSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStraight	Category	Capacitors
ArrowSkyCap? SRCapacitance33pFTolerance±5%Voltage - Rated200VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight		Ceramic Capacitors
Capacitance33 pFTolerance±5%Voltage - Rated200 VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Package	Radial
Tolerance±%Voltage - Rated200VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Lead Spating0.100° (2.54mm)Lead StyleStraight	Series	SkyCap? SR
Voltage - Rated200VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFaiture Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStraight	Capacitance	33pF
Temperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)0.100" (2.54mm)Lead SpacingStraight	Tolerance	±5%
Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81 mm x 2.54 mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54 mm)Kead StyleStraight	Voltage - Rated	200V
Features-Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)0.100" (2.54mm)Lead Spacing0.100" (2.54mm)Kate StyleStraight	Features	-
Failure Rate-Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Applications	General Purpose
Package / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Failure Rate	-
Size / Dimension 0.150" L x 0.100" W (3.81mm x 2.54mm) Height - Seated (Max) 0.150" (3.81mm) Thickness (Max) - Lead Spacing 0.100" (2.54mm) Lead Style Straight	Mounting Type	Through Hole
Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Package / Case	Radial
Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Size / Dimension	0.150" L x 0.100" W (3.81mm x 2.54mm)
Lead Spacing0.100" (2.54mm)Lead StyleStraight	Height - Seated (Max)	0.150" (3.81mm)
Lead Style Straight	Thickness (Max)	-
	Lead Spacing	0.100" (2.54mm)
Report errors?	Lead Style	Straight
		Report errors?

SR152A330JAAAP1 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SR152A330JAAAP1 Payment Methods



SR152A330JAAAP1 Shipping Methods



If you have any question about SR152A330JAAAP1, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com