


SR155A3R9DAATR1

SR155A3R9DAATR1 Information

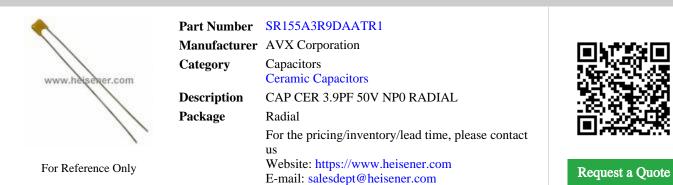

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SR155A3R9DAATR1 Specifications

Manufacturer Part Number SR155A3R9DAATR1 Manufacturer AVX Corporation Capacitors Capacitors Package Radial Series SkyCap? SR Capacitance ±0.5pF Tolerance Coefficient 50% Coefficient Voltage - Rated 50% Coefficient Operating Temperature 50% Coefficient Series 606, NPO Ratings - Applications 50% Coefficient Operating Temperature 50% Coefficient Applications General Purpose Ratings - Applications General Purpose Size / Dimension Instruments 2.54mm) Height - Seated (Max) 0.150° (X s.0.100° W (3.81mm x 2.54mm) Height - Seated (Max) - Thickness (Max) 0.100° (2.54mm) Lead Spacing 0.100° (2.54mm)		
Capacitors Package Radial Series SkyCap? SR Capacitance 3.9pF Tolerance 40.5pF Voltage - Rated 50V Perperature Coefficient COG, NPO Operating Temperature -55°C ~ 125°C Factures - Applications General Purpose Applications General Purpose Mounting Type Nong Hole Size / Dimension 0.150° (3.81mm x 2.54mm) Size / Dimension 0.150° (3.81mm) Height - Seated (Max) - Thickness (Max) - Lead Syle Stright	Manufacturer Part Number	SR155A3R9DAATR1
Ceramic CapacitorsPackageRadialSeriesSkyCap? SRCapacitance3.9pFTolerance±0.5pFVoltage - RatedS0VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeAdialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Fickness (Max)-Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStraight	Manufacturer	AVX Corporation
PackageRadialSeriesSkyCap? SRCapacitance3.9pFTolerance±0.5pFVoltage - RatedS0VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures.Ratings-ApplicationsGeneral PurposeFailure Rate.Nourting TypeThrough HoleSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max).Thickness (Max).Lead Spacing0.100° (2.54mm)Lead StyleStraight	Category	Capacitors
ArrowSkyCap? SRCapacitance3.9pFTolerance±0.5pFVoltage - Rated50VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Nounting TypeThrough HoleSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight		Ceramic Capacitors
Capacitance3.9FTolerance±0.5pFVoltage - Rated50VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Package	Radial
Tolerance±0.5pFVoltage - Rated50VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleStackge / CaseRatialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStraight	Series	SkyCap? SR
Voltage - Rated50VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFaiture Rate-Mounting TypeHolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Fhickness (Max)0.100" (2.54mm)Lead SpacingStraightKatight0.100" (2.54mm)	Capacitance	3.9pF
Temperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)0.100° (2.54mm)Lead SpacingStraight	Tolerance	$\pm 0.5 pF$
Operating Temperature.55°C ~ 125°CFeatures.Ratings.ApplicationsGeneral PurposeFailure Rate.Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max).Thickness (Max).Lead Spacing0.100" (2.54mm)Kead StyleStraight	Voltage - Rated	50V
Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Applications	General Purpose
Package / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Failure Rate	-
Size / Dimension 0.150" L x 0.100" W (3.81mm x 2.54mm) Height - Seated (Max) 0.150" (3.81mm) Thickness (Max) - Lead Spacing 0.100" (2.54mm) Lead Style Straight	Mounting Type	Through Hole
Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Package / Case	Radial
Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Size / Dimension	0.150" L x 0.100" W (3.81mm x 2.54mm)
Lead Spacing0.100" (2.54mm)Lead StyleStraight	Height - Seated (Max)	0.150" (3.81mm)
Lead Style Straight	Thickness (Max)	-
· · · · · · · · · · · · · · · · · · ·	Lead Spacing	0.100" (2.54mm)
Report errors?	Lead Style	Straight
		Report errors?

SR155A3R9DAATR1 Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

DISCOVER

SR155A3R9DAATR1 Payment Methods



SR155A3R9DAATR1 Shipping Methods



If you have any question about SR155A3R9DAATR1, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com