


SR155C272JAA

SR155C272JAA Information

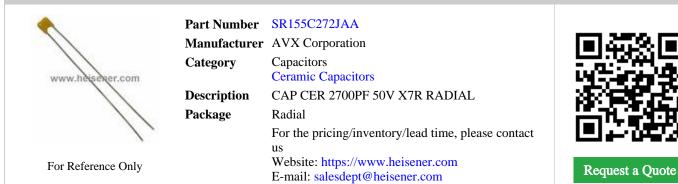

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SR155C272JAA Specifications

Manufacturer Part NumberSR155C272JAAManufacturerAVX CorporationCategoryCapacitorsPackageRadialPackageSkyCap? SRCapacitance2700pFYoltage - Rated50VYoltage - RatedSv7 ROperating Temperature Coefficient55°C ~ 125°CPackage6eneral PurposeRatings-ApplicationsGeneral PurposePackage / CaseSill AllMounting TypeThrough HolePackage / CaseRadialSize / Dimension1.50° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing1.00° (2.54mm)Lead SpacingSiraightLead SpacingSiraight <th>-</th> <th></th>	-	
CategoryCapacitorsPackageRadialSeriesSkyCap? SRCapacitance2700pFTolerance±5%Voltage - Rated50°COperating Temperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSiz / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStraight	Manufacturer Part Number	SR155C272JAA
Ceranic CapacitorsPackageRadialSeriesSkyCap? SRCapacitance2700pFTolerance±5%Voltage - Rated50VTemperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150° L x 0.100° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100° (2.54mm)Lead StyleStraight	Manufacturer	AVX Corporation
PackageRadialSeriesSkyCap? SRCapacitance2700pFTolerance±5%Voltage - Rated50VTemperature CoefficientX7ROperating Temperature-5°°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeStrong HolePackage / Case0.10° U x 0.10° W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.10° (2.54mm)Lead StyleStraight	Category	Capacitors
SeriesSkyCap? SRCapacitance2700pFTolerance±5%Voltage - Rated50VTemperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight		Ceramic Capacitors
Capacitance2700pFTolerance±5%Voltage - Rated50VTemperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Package	Radial
Tolerance±5%Voltage - Rated50VTemperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Series	SkyCap? SR
Voltage - Rated50VTemperature CoefficientX7ROperating Temperature-5°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)0.100" (2.54mm)Lead SpacingStraight	Capacitance	2700pF
Temperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)0.100" (2.54mm)Lead SpacingStraight	Tolerance	±5%
Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Voltage - Rated	50V
Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Temperature Coefficient	X7R
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Features	-
Failure Rate-Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Applications	General Purpose
Package / CaseRadialSize / Dimension0.150" L x 0.100" W (3.81mm x 2.54mm)Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Failure Rate	-
Size / Dimension 0.150" L x 0.100" W (3.81mm x 2.54mm) Height - Seated (Max) 0.150" (3.81mm) Thickness (Max) - Lead Spacing 0.100" (2.54mm) Lead Style Straight	Mounting Type	Through Hole
Height - Seated (Max)0.150" (3.81mm)Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Package / Case	Radial
Thickness (Max)-Lead Spacing0.100" (2.54mm)Lead StyleStraight	Size / Dimension	0.150" L x 0.100" W (3.81mm x 2.54mm)
Lead Spacing0.100" (2.54mm)Lead StyleStraight	Height - Seated (Max)	0.150" (3.81mm)
Lead Style Straight	Thickness (Max)	-
	Lead Spacing	0.100" (2.54mm)
Report errors?	Lead Style	Straight
		Report errors?

SR155C272JAA Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SR155C272JAA Payment Methods





If you have any question about SR155C272JAA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com