


SR211A101FAR

SR211A101FAR Information

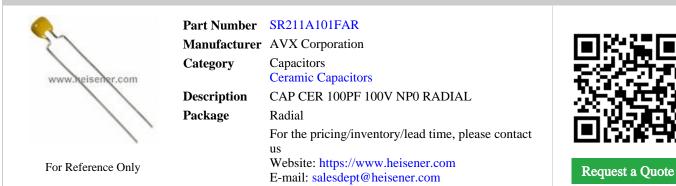

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SR211A101FAR Specifications

Manufacturer Part Number SR211A101FAR Manufacturer AVX Corporation Capacitors Capacitors Package Radial Series StyCap? SR Capacitance 100pF Tolerance ±1% Voltage - Rated 000V Operating Temperature 005C NP0 Pactargs - Strings - Applications General Purpose Applications General Purpose Faitures Ate - Applications General Purpose Faiture Rate - Mounting Type Through Hole Package / Case Radial Size / Dimension 0.200" L x 0.125" W (5.08mm x 3.18mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing - Lead Spacing -		
CategoryCapacitorsPackageRadialSeriesSkyCap? SRCapacitance100pFTolerance±1%Voltage - Rated00VTomperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CPactangs-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeNough HolePackage / Case.Siz / Dimension0.20° L x 0.125° W (5.08mm x 3.18mm)Fickness (Max).Faiters.Faiter State (Max).Siz / Dimension0.300° (7.62mm)Height - Seated (Max).Fickness (Max).Lead Spacing.Lead StyleFormed Leads - Kinked	Manufacturer Part Number	SR211A101FAR
Ceranic CapacitorsPackageRadialSeriesSkyCap? SRCapacitance100pFTolerance±1%Voltage - Rated100VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.300" (7.62mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing6.200" (5.08mm)Lead StyleFormed Leads - Kinked	Manufacturer	AVX Corporation
PackageRadialSeriesSkyCap? SRCapacitance100pFTolerance±1%Voltage Rated100VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.200° L x 0.125° W (5.08mm x 3.18mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleFormed Leads - Kinked	Category	Capacitors
Series SkyCap? SR Capacitance 100pF Tolerance ±1% Voltage - Rated 100V Temperature Coefficient COG, NPO Operating Temperature -55°C ~ 125°C Features - Ratings - Applications General Purpose Failure Rate - Noutring Type Through Hole Size / Dimension 0.200° L x 0.125° W (5.08mm x 3.18mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.200° (5.08mm) Lead Style Formed Leads - Kinked		Ceramic Capacitors
CapacitanceOTolerance±1%Voltage - Rated100VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleSize / Dimension0.200° L x 0.125° W (5.08mm x 3.18mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleFormed Leads - Kinked	Package	Radial
Tolerance±1%Voltage - Rated100VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.300" (7.62mm) x 3.18mm)Height - Seated (Max)-Lead Spacing0.200" (5.08mm X)Lead StyleFormed Leads - Kinked	Series	SkyCap? SR
Voltage - Rated100VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeHolePackage / CaseRadialSize / Dimension0.200° L x 0.125° W (5.08mm x 3.18mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleFormed Leads - Kinked	Capacitance	100pF
Temperature Coefficient COG, NPO Operating Temperature -55°C ~ 125°C Features - Ratings - Applications General Purpose Failure Rate - Mounting Type Through Hole Size / Dimension 0.200" L x 0.125" W (5.08mm x 3.18mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.200" (5.08mm) Lead Style Formed Leads - Kinked	Tolerance	$\pm 1\%$
Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Voltage - Rated	100V
Features-Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)0.200" (5.08mm)Lead Spacing0.200" (5.08mm)Height - Seated (Max)0.200"	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)0.200" (5.08mm)Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Features	-
Failure Rate-Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Applications	General Purpose
Package / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Failure Rate	-
Size / Dimension 0.200" L x 0.125" W (5.08mm x 3.18mm) Height - Seated (Max) 0.300" (7.62mm) Thickness (Max) - Lead Spacing 0.200" (5.08mm) Lead Style Formed Leads - Kinked	Mounting Type	Through Hole
Height - Seated (Max)0.300" (7.62mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Package / Case	Radial
Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Size / Dimension	0.200" L x 0.125" W (5.08mm x 3.18mm)
Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Height - Seated (Max)	0.300" (7.62mm)
Lead Style Formed Leads - Kinked	Thickness (Max)	-
	Lead Spacing	0.200" (5.08mm)
Report errors?	Lead Style	Formed Leads - Kinked
		Report errors?

SR211A101FAR Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SR211A101FAR Payment Methods



SR211A101FAR Shipping Methods



If you have any question about SR211A101FAR, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com