


SR211A222GAA

SR211A222GAA Information



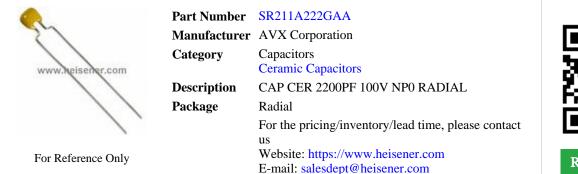

Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SR211A222GAA Specifications

ManufacturerAVX CorporationCapacitorsCaramic CapacitorsPackageRadialSeriesSkyCap? SRCapacitance2200pFTolerance±2%Voltage - Rated100VTomperature CoefficientCOG, NPOOperating Temperature-Package-Fatures-Fatures-ApplicationsGeneral PurposeFailure Rate-Mounting TypeStrolgh HolePackage / CaseRadialSize / Dimension0,200" (s.08mm) x 3.18mm)Height - Seated (Max)-Height - Seated (Max)-Lead Spacing0,200" (s.08mm)		
CapacitorsPackageRadialSeriesSkyCap? SRCapacitance2200pFTolerance±2%Voltage - Rated100VToperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200° (L x 0.125° W (5.08mm x 3.18mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleFormed Leads - Kinked	Manufacturer Part Number	
Ceramic CapacitorsPackageRadialSeriesSkyCap? SRCapacitance200pFTolerance±2%Voltage - Rated100VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200° (5.08mm)Height - Seated (Max)-Thickness (Max)-Lead SpacingGormal Leads - Kinked	Manufacturer	AVX Corporation
PackageRadialSeriesSkyCap? SRCapacitance2200pFTolerance±2%Voltage - Rated100VTomperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead SyleFormed Leads - Kinked	Category	Capacitors
Series SkyCap? SR Capacitance 2200pF Tolerance ±2% Voltage - Rated 100V Temperature Coefficient COG, NP0 Operating Temperature -55°C ~ 125°C Features - Ratings - Applications General Purpose Failure Rate - Mounting Type Through Hole Package / Case Radial Size / Dimension 0.200" L x 0.125" W (5.08mm x 3.18mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.200" (5.08mm)		Ceramic Capacitors
Capacitance2200pFTolerance±2%Voltage - Rated100VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" (5.08mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Package	Radial
Tolerance±2%Voltage - Rated100VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing6.200" (5.08mm)Lead StyleFormed Leads - Kinked	Series	SkyCap? SR
Voltage - Rated100VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200° L x 0.125° W (5.08mm x 3.18mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleFormed Leads - Kinked	Capacitance	2200pF
Temperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Tolerance	±2%
Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Voltage - Rated	100V
Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Applications	General Purpose
Package / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Failure Rate	-
Size / Dimension 0.200" L x 0.125" W (5.08mm x 3.18mm) Height - Seated (Max) 0.200" (5.08mm) Thickness (Max) - Lead Spacing 0.200" (5.08mm) Lead Style Formed Leads - Kinked	Mounting Type	Through Hole
Height - Seated (Max)0.200" (5.08mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Package / Case	Radial
Thickness (Max) - Lead Spacing 0.200" (5.08mm) Lead Style Formed Leads - Kinked	Size / Dimension	0.200" L x 0.125" W (5.08mm x 3.18mm)
Lead Spacing0.200" (5.08mm)Lead StyleFormed Leads - Kinked	Height - Seated (Max)	0.200" (5.08mm)
Lead Style Formed Leads - Kinked	Thickness (Max)	-
•	Lead Spacing	0.200" (5.08mm)
	Lead Style	Formed Leads - Kinked
Report errors?		Report errors?

SR211A222GAA Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SR211A222GAA Payment Methods



SR211A222GAA Shipping Methods



If you have any question about SR211A222GAA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com