


# SR211A331FAR

## SR211A331FAR Information

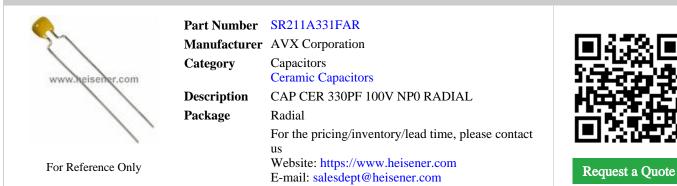

## **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



## SR211A331FAR Specifications

Series         SkyCap? SR           Capacitance         330pF           Tolerance         ±1%           Voltage - Rated         100V           Temperature Coefficient         COG, NPO           Operating Temperature         -55°C ~ 125°C           Features         -           Applications         General Purpose           Applications         General Purpose           Faiture Rate         -           Mounting Type         Through Hole           Package / Case         Radial           Size / Dimension         0.200°L x 0.125°W (5.08mm x 3.18mm) <th></th> <th></th>		
CategoryCapacitorsPackageRadialPackageSkyCap? SRCapacitance330pFTolerance±1%Voltage - Rated100VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures.ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)	Manufacturer Part Number	SR211A331FAR
Ceranic CapacitorsPackageRadialSeriesSkyCap? SRCapacitance330pFTolerance±1%Voltage - Rated100VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)	Manufacturer	AVX Corporation
PackageRadialSeriesSkyCap? SRCapacitance330pFTolerance±1%Voltage - Rated100VTemperature CoefficientCOG, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200° L x 0.125° W (5.08mm x 3.18mm)	Category	Capacitors
Series         SkyCap? SR           Capacitance         330pF           Tolerance         ±1%           Voltage - Rated         100V           Temperature Coefficient         COG, NPO           Operating Temperature         -55°C ~ 125°C           Features         -           Applications         General Purpose           Failure Rate         -           Mounting Type         Through Hole           Package / Case         Radial           Size / Dimension         0.200" L x 0.125" W (5.08mm x 3.18mm)		Ceramic Capacitors
Capacitance330pFTolerance±1%Voltage - Rated100VTemperature CoefficientC0G, NP0Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)	Package	Radial
Tolerance±1%Voltage - Rated100VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HoleStack JohnsonRatialStack Johnson020" L x 0.125" W (5.08mm x 3.18mm)	Series	SkyCap? SR
Voltage - Rated100VTemperature CoefficientCOG, NPOOperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Nounting TypeHolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)	Capacitance	330pF
Temperature Coefficient         COG, NPO           Operating Temperature         -55°C ~ 125°C           Features         -           Ratings         -           Applications         General Purpose           Failure Rate         -           Mounting Type         Through Hole           Package / Case         Radial           Size / Dimension         0.200" L x 0.125" W (5.08mm x 3.18mm)	Tolerance	±1%
Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)	Voltage - Rated	100V
Features-Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)	Temperature Coefficient	C0G, NP0
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)	Features	-
Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)	Applications	General Purpose
Package / CaseRadialSize / Dimension0.200" L x 0.125" W (5.08mm x 3.18mm)	Failure Rate	-
Size / Dimension 0.200" L x 0.125" W (5.08mm x 3.18mm)	Mounting Type	Through Hole
	Package / Case	Radial
Height - Seated (Max) 0.300" (7.62mm)	Size / Dimension	0.200" L x 0.125" W (5.08mm x 3.18mm)
6 · · · ·	Height - Seated (Max)	0.300" (7.62mm)
Thickness (Max) -	Thickness (Max)	-
Lead Spacing 0.200" (5.08mm)	Lead Spacing	0.200" (5.08mm)
Lead Style Formed Leads - Kinked	Lead Style	Formed Leads - Kinked
Report errors?		Report errors?

### SR211A331FAR Guarantees



Quality Guarantees

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### **Service Guarantees**

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

## SR211A331FAR Payment Methods



## SR211A331FAR Shipping Methods



If you have any question about SR211A331FAR, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com