


SR301C274JAR

SR301C274JAR Information

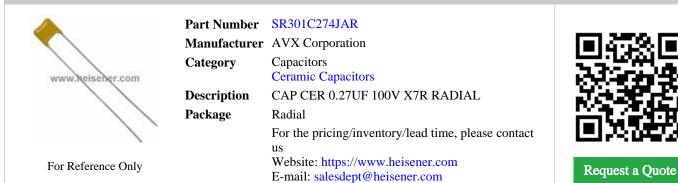

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SR301C274JAR Specifications

Manufacturer Part Number SR301C274JAR Manufacturer AVX Corporation Capacitons Capacitons Package Radial Package Radia Series SkyCap? SR Capacitance ±5% Yoltage - Rated 100V Tomperature Coefficient 00V Pactarg 55°C ~ 125°C Pating Series 6aeral Purpose Applications General Purpose Pating Series 6aeral Purpose Pating Series General Purpose Pating Series Gono't x 0.150'' W 7.62mm x 3.81mm) Pating Series Gono't x 0.150'' W 7.62mm x 3.81mm) Pating Series Gono't Somma X.81mm) Pating Series Gono't Somma X.81mm)		
CapacityCapacitorsPackageRadialSeriesSkyCap? SRCapacitance0.27 µFTolerance±5%Voltage - Rated100 VTomperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeNinough HolePackage / Case.300° L x 0.150° W (7.62mm x 3.81mm)Fieldy - Seated (Max).300° (1.4mm)Height - Seated (Max).300° (1.508mm)Lead StyleStraight	Manufacturer Part Number	SR301C274JAR
Ceramic CapacitorsPackageRadialSeriesSkyCap? SRCapacitance0.27µFTolerance±5%Voltage - Rated100VTemperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeGnorgh HoleSize / Dimension0.300" L x 0.150" W (7.62mm x 3.81mm)Fickness (Max)-Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Manufacturer	AVX Corporation
PackageRadialSeriesSkyCap? SRCapacitance0.27μFTolerance±5%Voltage Rated100VTemperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Noutring TypeThrough HoleSize / Dimension0.300° L x 0.150° W (7.62mm x 3.81mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200° (5.08mm)Lead StyleStraight	Category	Capacitors
Arrow SkyCap? SR Capacitance 0.27μF Tolerance ±5% Voltage - Rated 100V Temperature Coefficient X7R Operating Temperature -55°C ~ 125°C Features - Ratings - Applications General Purpose Failure Rate - Noutring Type Through Hole Size / Dimension 0.300° L x 0.150° W (7.62mm x 3.81mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.200° (5.08mm) Lead Style Straight		Ceramic Capacitors
Capacitance 0.27µF Tolerance ±5% Voltage - Rated 100V Temperature Coefficient X7R Operating Temperature -55°C ~ 125°C Features - Ratings - Applications General Purpose Failure Rate - Mounting Type Through Hole Package / Case Radial Size / Dimension 0.300" L x 0.150" W (7.62mm x 3.81mm) Height - Seated (Max) - Thickness (Max) - Lead Spacing 0.200" (5.08mm) Lead Style Straight	Package	Radial
Tolerance±5%Voltage - Rated100VTemperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.300" L x 0.150" W (7.62mm x 3.81mm)Height - Seated (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Series	SkyCap? SR
Voltage - Rated100VTemperature CoefficientX7ROperating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.300" L x 0.150" W (7.62mm x 3.81mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Capacitance	0.27µF
Temperature CoefficientX7ROperating Temperature-5°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.300" L x 0.150" W (7.62mm x 3.81mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Tolerance	±5%
Operating Temperature-55°C ~ 125°CFeatures-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.300" L x 0.150" W (7.62mm x 3.81mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Voltage - Rated	100V
Features-Features-Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.300" L x 0.150" W (7.62mm x 3.81mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Temperature Coefficient	X7R
Ratings-ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.300" L x 0.150" W (7.62mm x 3.81mm)Height - Seated (Max)-Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Operating Temperature	-55°C ~ 125°C
ApplicationsGeneral PurposeFailure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.300" L x 0.150" W (7.62mm x 3.81mm)Height - Seated (Max)0.360" (9.14mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Features	-
Failure Rate-Failure Rate-Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.300" L x 0.150" W (7.62mm x 3.81mm)Height - Seated (Max)0.360" (9.14mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Ratings	-
Mounting TypeThrough HolePackage / CaseRadialSize / Dimension0.300" L x 0.150" W (7.62mm x 3.81mm)Height - Seated (Max)0.360" (9.14mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Applications	General Purpose
Package / CaseRadialSize / Dimension0.300" L x 0.150" W (7.62mm x 3.81mm)Height - Seated (Max)0.360" (9.14mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Failure Rate	-
Size / Dimension 0.300" L x 0.150" W (7.62mm x 3.81mm) Height - Seated (Max) 0.360" (9.14mm) Thickness (Max) - Lead Spacing 0.200" (5.08mm) Lead Style Straight	Mounting Type	Through Hole
Height - Seated (Max)0.360" (9.14mm)Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Package / Case	Radial
Thickness (Max)-Lead Spacing0.200" (5.08mm)Lead StyleStraight	Size / Dimension	0.300" L x 0.150" W (7.62mm x 3.81mm)
Lead Spacing0.200" (5.08mm)Lead StyleStraight	Height - Seated (Max)	0.360" (9.14mm)
Lead Style Straight	Thickness (Max)	-
	Lead Spacing	0.200" (5.08mm)
Report errors?	Lead Style	Straight
		Report errors?

SR301C274JAR Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE BUARANTEE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SR301C274JAR Payment Methods





If you have any question about SR301C274JAR, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com