


SRCN1A25-24P

SRCN1A25-24P Information

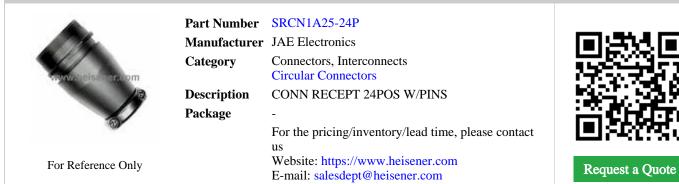

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SRCN1A25-24P Specifications

Manufacturer Part Number SRCN1A25-24P Manufacturer JAE Electronics Category Connectors, Interconnects Category Circular Connectors Package - Series SRCN Connector Type Receptacle, Male Pins Number of Positions 24 Shell Size - Insert 25-24 Mounting Type Free Hanging (In-Line) Mounting Type Free Hanging (In-Line) Termination Solder Cup Fastening Type Threaded Orientation N (Normal) Ingress Protection - Shell Material, Finish Aluminum Alloy, Nickel Plated Contact Finish Silver Features Cable Clamp Voltage - Rated StOVAC, 350VDC Current Rating StovAC, 350VDC		
CategoryConnectorsCategoryConnectorsPackage-SeriesSRCNConnector TypeReceptacle, Male PinsNumber of Positions24Shell Size - Insert25-24Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Nickel PlatedContact FinishSilverFeaturesCable ClampVoltage - Rated55	Manufacturer Part Number	SRCN1A25-24P
Circular ConnectorsPackage-SeriesSRCNConnector TypeReceptacle, Male PinsNumber of Positions24Shell Size - Insert25-24Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Nickel PlatedContact FinishSilverFeaturesCable ClampVoltage - Rated5A	Manufacturer	JAE Electronics
Package-SeriesSRCNConnector TypeReceptacle, Male PinsNumber of Positions24Shell Size - InsertSolder CupShell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Nickel PlatedContact FinishSilverFeaturesCable ClampVoltage - RatedSolVAC, 350VDCCurrent RatingSA	Category	Connectors, Interconnects
SeriesSRCNConnector TypeReceptacle, Male PinsNumber of Positions24Shell Size - Insert25-24Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishSilverContact FinishSilverFeaturesCable ClampVoltage - Rated50 VAC, 350 VDCCurrent Rating5A		Circular Connectors
Connector TypeReceptacle, Male PinsNumber of Positions24Shell Size - Insert25-24Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishSilverFeaturesCable ClampVoltage - Rated250VAC, 350VDCKateriang Type5A	Package	-
Number of Positions24Shell Size - Insert25-24Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Nickel PlatedContact FinishSilverFeaturesCable ClampVoltage - Rated5A	Series	SRCN
Shell Size - Insert25-24Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Nickel PlatedContact FinishSilverFeaturesCable ClampVoltage - Rated5A	Connector Type	Receptacle, Male Pins
Shell Size, MIL-Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN(Normal)Ingress Protection-Shell Material, FinishAluninum Alloy, Nickel PlatedContact FinishSilverFeaturesCable ClampVoltage - Rated50VAC, 350VDCCurrent RatingSa	Number of Positions	24
Mounting TypeFree Hanging (In-Line)TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Orientation-Shell Material, FinishAluminum Alloy, Nickel PlatedContact FinishSilverFeaturesCable ClampVoltage - Rated50VAC, 350VDCCurrent RatingSal	Shell Size - Insert	25-24
TerminationSolder CupFastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Nickel PlatedContact FinishSilverFeaturesCable ClampVoltage - Rated250VAC, 350VDCCurrent RatingSA	Shell Size, MIL	-
Fastening TypeThreadedOrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Nickel PlatedContact FinishSilverFeaturesCable ClampVoltage - Rated250VAC, 350VDCCurrent RatingSA	Mounting Type	Free Hanging (In-Line)
OrientationN (Normal)Ingress Protection-Shell Material, FinishAluminum Alloy, Nickel PlatedContact FinishSilverFeaturesCable ClampVoltage - Rated250VAC, 350VDCCurrent RatingSA	Termination	Solder Cup
Ingress Protection-Shell Material, FinishAluminum Alloy, Nickel PlatedContact FinishSilverFeaturesCable ClampVoltage - Rated250VAC, 350VDCCurrent RatingSA	Fastening Type	Threaded
Shell Material, FinishAluminum Alloy, Nickel PlatedContact FinishSilverFeaturesCable ClampVoltage - Rated250VAC, 350VDCCurrent RatingSA	Orientation	N (Normal)
Contact FinishSilverFeaturesCable ClampVoltage - Rated250VAC, 350VDCCurrent Rating5A	Ingress Protection	-
FeaturesCable ClampVoltage - Rated250VAC, 350VDCCurrent Rating5A	Shell Material, Finish	Aluminum Alloy, Nickel Plated
Voltage - Rated250VAC, 350VDCCurrent Rating5A	Contact Finish	Silver
Current Rating 5A	Features	Cable Clamp
-	Voltage - Rated	250VAC, 350VDC
Report errors?	Current Rating	5A
		Report errors?

SRCN1A25-24P Guarantees



Quality Guarantees

We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.

SERVICE

Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SRCN1A25-24P Payment Methods





If you have any question about SRCN1A25-24P, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com