

SSD32

SSD32 Information



For Reference Only

Part Number	SSD32	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE CRTRDGE 32A 240VAC CYLINDR	
Package	Cylindrical, Blade Terminal (Alternating)	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SSD32 Specifications

ManufacturerEatonCategoryCircuit ProtectionElectrical, Specialty FusesPackageCylindrical, Blade Terminal (Alternating)SeriesSSDFuse TypeCartridgeCurrent Rating32AVoltage Rating - AC240VVoltage Rating - DC-ApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage33AAMonting TypeHolderPackage / CaseCylindrical, Blade Terminal (Alternating)		
CategoryCircuit ProtectionElectrical, Specialty FusesPackageCylindrical, Blade Terminal (Alternating)SeriesSSDFuse TypeCartridgeCurrent Rating32AVoltage Rating - AC240VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCylindrical, Blade Terminal (Alternating)Size / Dimension0.472" Dia x 0.906" L (12.00mm x 23.00mm)	Manufacturer Part Number	SSD32
DefinitionElectrical, Specialty FusesPackageCylindrical, Blade Terminal (Alternating)SeriesSSDFuse TypeCartridgeCurrent Rating32AVoltage Rating - AC240VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCylindrical, Blade Terminal (Alternating)Size / Dimension0,472" Dia x 0.906" L (12.00mm x 23.00mm)	Manufacturer	Eaton
PackageCylindrical, Blade Terminal (Alternating)SeriesSSDFuse TypeCartridgeCurrent Rating32AVoltage Rating - AC240VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCylindrical, Blade Terminal (Alternating)Size / Dimension0.472" Dia x 0.906" L (12.00mm x 23.00mm)	Category	Circuit Protection
SeriesSDFuse TypeCartridgeCurrent Rating32AVoltage Rating - AC240VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCylindrical, Blade Terminal (Alternating)Size / Dimension0.472" Dia x 0.900" L (12.00mm x 23.00mm)		Electrical, Specialty Fuses
Fuse TypeCartridgeCurrent Rating32AVoltage Rating - AC240VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCylindrical, Blade Terminal (Alternating)Size / Dimension0.472" Dia x 0.906" L (12.00mm x 23.00mm)	Package	Cylindrical, Blade Terminal (Alternating)
Current Rating32ACurrent Rating - AC240VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCylindrical, Blade Terminal (Alternating)Size / Dimension0.472" Dia x 0.906" L (12.00mm x 23.00mm)	Series	SSD
Voltage Rating - AC240VVoltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCylindrical, Blade Terminal (Alternating)Size / Dimension0.472" Dia x 0.906" L (12.00mm x 23.00mm)	Fuse Type	Cartridge
Voltage Rating - DC-Response Time-ApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCylindrical, Blade Terminal (Alternating)Size / Dimension0.472" Dia x 0.906" L (12.00mm x 23.00mm)	Current Rating	32A
Response Time-ApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCylindrical, Blade Terminal (Alternating)Size / Dimension0.472" Dia x 0.906" L (12.00mm x 23.00mm)	Voltage Rating - AC	240V
ApplicationsElectrical, IndustrialFeatures-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCylindrical, Blade Terminal (Alternating)Size / Dimension0.472" Dia x 0.906" L (12.00mm x 23.00mm)	Voltage Rating - DC	-
Features-Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCylindrical, Blade Terminal (Alternating)Size / Dimension0.472" Dia x 0.906" L (12.00mm x 23.00mm)	Response Time	-
Class-Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCylindrical, Blade Terminal (Alternating)Size / Dimension0.472" Dia x 0.906" L (12.00mm x 23.00mm)	Applications	Electrical, Industrial
Approvals-Operating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCylindrical, Blade Terminal (Alternating)Size / Dimension0.472" Dia x 0.906" L (12.00mm x 23.00mm)	Features	-
Operating Temperature-Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCylindrical, Blade Terminal (Alternating)Size / Dimension0.472" Dia x 0.906" L (12.00mm x 23.00mm)	Class	-
Breaking Capacity @ Rated Voltage33kAMounting TypeHolderPackage / CaseCylindrical, Blade Terminal (Alternating)Size / Dimension0.472" Dia x 0.906" L (12.00mm x 23.00mm)	Approvals	-
Mounting TypeHolderPackage / CaseCylindrical, Blade Terminal (Alternating)Size / Dimension0.472" Dia x 0.906" L (12.00mm x 23.00mm)	Operating Temperature	-
Package / CaseCylindrical, Blade Terminal (Alternating)Size / Dimension0.472" Dia x 0.906" L (12.00mm x 23.00mm)	Breaking Capacity @ Rated Voltage	33kA
Size / Dimension 0.472" Dia x 0.906" L (12.00mm x 23.00mm)	Mounting Type	Holder
	Package / Case	Cylindrical, Blade Terminal (Alternating)
Report errors?	Size / Dimension	0.472" Dia x 0.906" L (12.00mm x 23.00mm)
		Report errors?

SSD32 Guarantees

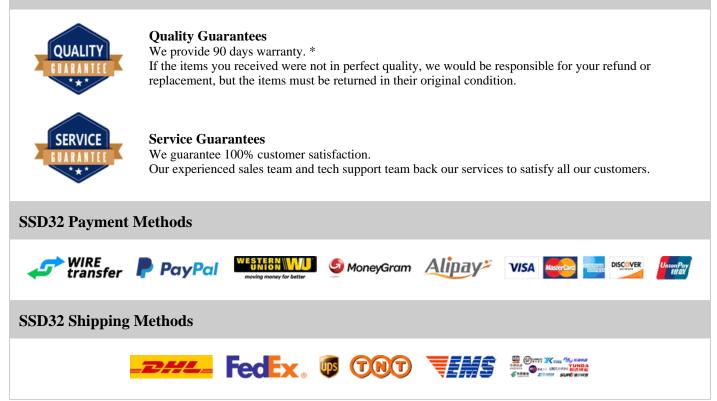

If you have any question about SSD32, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com