


# SSL-LX100T123UWC

## SSL-LX100T123UWC Information

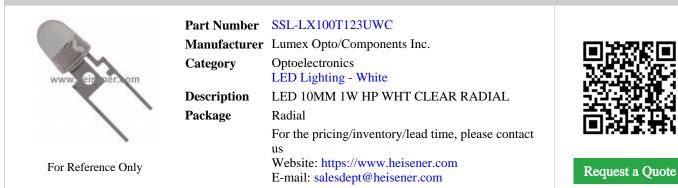

# **Certified Quality**

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



# SSL-LX100T123UWC Specifications

ManufacturerLumex Opto/Components Inc.CategoryOptoelectronicsLED Lighting - WhitePackageRadialSeries-ColorWhiteCOlorWhiteCCT (K)-Flux @ 85°C, Current - Test37 lm (Typ)Current - Test350mAVoltage - Forward (Vf) (Typ)3.5VLumens/Watt @ Current - Test30 lm/WCRI (Color Rendering Index)-Current - Max500mAViewing Angle25°Package / CaseRadialSupplier Device Package-Size / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.494" (12.54mm)		
CategoryOptoelectronicsLED Lighting - WhitePackageRadialPackage-ColorWhiteColor-CCT (K)-Flux @ S°C, Current - Test-Stress37 lm (Typ)Current - Test350mAVoltage - Forward (Vf) (Typ)3.5 VLumens/Watt @ Current - Test30 lm/WCRI (color Rendering Index)-Current - Max500mAViewing Angle25°Package / CaseRadialSupplier Device Package-Size / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.494" (12.54mm)	Manufacturer Part Number	SSL-LX100T123UWC
LED Lighting - WhitePackageRadialSeries-ColorWhiteColorWhiteCCT (K)-Flux @ 85°C, Current - Test37 lm (Typ)Flux @ 25°C, Current - Test350mACurrent - Test30 lm/WVoltage - Forward (Vf) (Typ)3.5VLumens/Watt @ Current - Test30 lm/WCRI (Color Rendering Index)-Current - Max500mAViewing Angle25°Mounting TypeThrough HolePackage / CaseRadialSupplier Device Package-Size / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.494" (12.54mm)	Manufacturer	Lumex Opto/Components Inc.
PackageRadialSeries-ColorWhiteColorWhiteCCT (K)-Flux @ 85°C, Current - Test-Flux @ 25°C, Current - Test37 Im (Typ)Current - Test350mAVoltage - Forward (Vf) (Typ)3.5 VLumens/Watt @ Current - Test30 Im/WCRI (Color Rendering Index)-Current - Max500mAViewing Angle25°Mounting TypeThrough HolePackage / CaseRadialSupplier Device Package-Siz / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.494" (12.54mm)	Category	Optoelectronics
Series   -     Series   -     Color   White     CCT (K)   -     Flux @ 85°C, Current - Test   -     Flux @ 25°C, Current - Test   37 lm (Typ)     Current - Test   350mA     Current - Test   30 lm/W     Voltage - Forward (Vf) (Typ)   3.5V     Lumens/Watt @ Current - Test   30 lm/W     Current - Max   500mA     Viewing Angle   25°     Mounting Type   Through Hole     Package / Case   Radial     Supplier Device Package   -     Size / Dimension   0.394" Dia (10.00mm)     Height - Seated (Max)   0.494" (12.54mm)		LED Lighting - White
ColorWhiteCCT (K)-Flux @ 85°C, Current - Test-Flux @ 25°C, Current - Test37 Im (Typ)Current - Test350mAVoltage - Forward (Vf) (Typ)3.5VLumens/Watt @ Current - Test30 Im/WCRI (Color Rendering Index)-Current - Max500mAViewing Angle25°Mounting TypeFhrough HolePackage / CaseRadialSupplier Device Package-Size / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.494" (12.54mm)	Package	Radial
CCT (K)-Flux @ 85°C, Current - Test-Flux @ 25°C, Current - Test37 Im (Typ)Current - Test350mAVoltage - Forward (Vf) (Typ)3.5 VLumens/Watt @ Current - Test30 Im/WCurrent - Max500mAViewing Angle25°Mounting TypeFhrough HolePackage / CaseRadialSupplier Device Package-Size / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.494" (12.54mm)	Series	-
Flux @ 85°C, Current - Test-Flux @ 25°C, Current - Test37 lm (Typ)Current - Test350mAVoltage - Forward (Vf) (Typ)3.5VLumens/Watt @ Current - Test30 lm/WCRI (Color Rendering Index)-Current - Max500mAViewing Angle25°Mounting TypeThrough HolePackage / Case-Supplier Device Package-Size / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.494" (12.54mm)	Color	White
Flux @ 25°C, Current - Test37 lm (Typ)Current - Test350mAVoltage - Forward (Vf) (Typ)3.5VLumens/Watt @ Current - Test30 lm/WCurrent - Max-Current - Max500mAViewing Angle25°Mounting TypeThrough HolePackage / Case-Supplier Device Package-Size / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.494" (12.54mm)	CCT (K)	-
Current - Test350mAVoltage - Forward (Vf) (Typ)3.5VLumens/Watt @ Current - Test30 lm/WCRI (Color Rendering Index)-Current - Max500mAViewing Angle25°Mounting TypeThrough HolePackage / CaseRadialSupplier Device Package-Size / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.494" (12.54mm)	Flux @ 85°C, Current - Test	-
Voltage - Forward (Vf) (Typ)3.5VLumens/Watt @ Current - Test30 lm/WCRI (Color Rendering Index)-Current - Max500mAViewing Angle25°Mounting TypeThrough HolePackage / CaseRadialSupplier Device Package-Size / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.494" (12.54mm)	Flux @ 25°C, Current - Test	37 lm (Typ)
Lumens/Watt @ Current - Test30 lm/WCRI (Color Rendering Index)-Current - Max500mAViewing Angle25°Mounting TypeThrough HolePackage / CaseRadialSupplier Device Package-Size / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.494" (12.54mm)	Current - Test	350mA
CRI (Color Rendering Index)-Current - Max500mAViewing Angle25°Mounting TypeThrough HolePackage / CaseRadialSupplier Device Package-Size / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.494" (12.54mm)	Voltage - Forward (Vf) (Typ)	3.5V
Current - Max500mAViewing Angle25°Mounting TypeThrough HolePackage / CaseRadialSupplier Device Package-Size / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.494" (12.54mm)	Lumens/Watt @ Current - Test	30 lm/W
Viewing Angle25°Mounting TypeThrough HolePackage / CaseRadialSupplier Device Package-Size / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.494" (12.54mm)	CRI (Color Rendering Index)	-
Mounting TypeThrough HolePackage / CaseRadialSupplier Device Package-Size / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.494" (12.54mm)	Current - Max	500mA
Package / CaseRadialSupplier Device Package-Size / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.494" (12.54mm)	Viewing Angle	25°
Supplier Device Package-Size / Dimension0.394" Dia (10.00mm)Height - Seated (Max)0.494" (12.54mm)	Mounting Type	Through Hole
Size / Dimension 0.394" Dia (10.00mm)   Height - Seated (Max) 0.494" (12.54mm)	Package / Case	Radial
Height - Seated (Max) 0.494" (12.54mm)	Supplier Device Package	-
	Size / Dimension	0.394" Dia (10.00mm)
Report errors?	Height - Seated (Max)	0.494" (12.54mm)
		Report errors?

### SSL-LX100T123UWC Guarantees



**Quality Guarantees** 

We provide 90 days warranty. \* If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



#### Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

# SSL-LX100T123UWC Payment Methods





If you have any question about SSL-LX100T123UWC, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com