

SSM-131-L-DV

SSM-131-L-DV Information

	TumberSSM-131-L-DVFacturerSamtec Inc.	a 25%.a
Catego www.hulbener.com	ory Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
Descri	ption CONN RCPT .100" 62POS DUAL VERT	105 8 .0 .
Packag	ge -	
	For the pricing/inventory/lead time, please contact	
For Reference Only	us Website: https://www.heisener.com E-mail: salesdept@heisener.com	Request a Quote

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SSM-131-L-DV Specifications

Manufacturer Part NumberSSM-131-L-DVManufacturerSamtec Inc.CategoryConnectors, InterconnectsPackage-SeriesSSMConnector TypeReceptacle, Pass ThroughContact TypeReceptacle, Pass ThroughContact TypeBoard to Board or CableNumber of Positions62Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - MatingSolderForniationSolderForniationSolderForniationGoldForniation ColorJuni (0.25µm)Isualion ColorBackIsualion ColorBack			
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesSSMConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions62Number of Positions LoadedIn10° (2.54mm)Number of Rows2Number of Rows0.100° (2.54mm)Number of RowsSocketNumber of RowsSocketStrafee Mounting TypeSocketStrafee Mounting TypeSocketContact Finish - MatingSocketContact Finish - MatingGoldContact Finish - MatingGoldStrafee MattingSocketStrafee MattingSocketStrafee MattingSocketStrafee MattingSocketStrafee Mounting TypeSocketStrafee Mount	Manufacturer Part Number	SSM-131-L-DV	
Hectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesSSMConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions62Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Monting TypeSolderFerminationSolderForminationSolderFording TypeSolderContact Finish - MatingGoldContact Finish - MatingBiak	Manufacturer	Samtec Inc.	
Package-SeriesSSMConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions62Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountFerminationSolderFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBiack	Category	Connectors, Interconnects	
SeriesSSMConnector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions62Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlack		Rectangular Connectors - Headers, Receptacles, Female Sockets	
Connector TypeReceptacle, Pass ThroughContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions62Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeSurface MountFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlack	Package	-	
Contact TypeFemale SocketStyleBoard to Board or CableNumber of Positions62Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)FarminationSolderFastening Type9ks-PullContact Finish - MatingGoldIonator Finish - MatingBiak	Series	SSM	
StyleBoard to Board or CableNumber of Positions62Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlack	Connector Type	Receptacle, Pass Through	
Number of Positions62Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Contact Type	Female Socket	
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingI0µin (0.25µm)Insulation ColorBlack	Style	Board to Board or Cable	
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldLontact Finish Thickness - MatingJupin (0.25µm)BackBack	Number of Positions	62	
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Number of Positions Loaded	All	
Row Spacing - Mating0.100" (2.54mm)Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Pitch - Mating	0.100" (2.54mm)	
Mounting TypeSurface MountTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Number of Rows	2	
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Row Spacing - Mating	0.100" (2.54mm)	
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Mounting Type	Surface Mount	
Contact Finish - MatingGoldContact Finish Thickness - Mating10µin (0.25µm)Insulation ColorBlack	Termination	Solder	
Contact Finish Thickness - Mating10μin (0.25μm)Insulation ColorBlack	Fastening Type	Push-Pull	
Insulation Color Black	Contact Finish - Mating	Gold	
	Contact Finish Thickness - Mating	10µin (0.25µm)	
Insulation Height 0.290" (7.37mm)	Insulation Color	Black	
	Insulation Height	0.290" (7.37mm)	
Contact Length - Post -	Contact Length - Post	-	
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Operating Temperature	-55°C ~ 125°C	
Material Flammability Rating -	Material Flammability Rating	-	

Contact Finish - Post	Tin	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?

SSM-131-L-DV Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SSM-131-L-DV Payment Methods

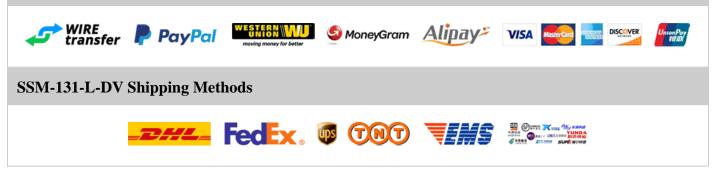

If you have any question about SSM-131-L-DV, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com