

SSQ-128-03-T-D-RA

SSQ-128-03-T-D-RA Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SSQ-128-03-T-D-RA Specifications

Manufacturer Part NumberSSQ-128-03-T-D-RAManufacturerSamtec Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesSSQConnector TypeReceptacles, Receptacles, Female SocketsConnector TypeReceptaclesContact TypeForkedStyleBoard or CableNumber of PositionsSoNumber of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - Mating-Contact Finish Thickness - Mating-Insulation ColorBlackInsulation Leight0.190° (7.62mm)Contact Length - Post0.300° (7.62mm)Contact Elemenability Rating119 40 0		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesSQConnector TypeReceptacleContact TypeReceptacleContact TypeBoard to Board or CableNumber of Positions56Number of Positions LoadedAllNumber of Rows2Row Spacing - Mating0.100° (2.54mm)Number of Rows2Row Spacing - MatingSolderYoung TypeSolderFreminationSolderContact Finish - MatingIninContact Finish - Mating-Insulation ColorBackInsulation FlexiptSolderInsulation FlexiptSolderContact Finish Thickness - Mating-Insulation FlexiptSolderInsulation FlexiptSolder <td>Manufacturer Part Number</td> <td>SSQ-128-03-T-D-RA</td>	Manufacturer Part Number	SSQ-128-03-T-D-RA
Ackage . Series SSQ Connector Type Receptacle Contact Type Forked Style Board to Board or Cable Number of Positions 56 Number of Positions Loaded All Prich - Mating 0.100° (2.54mm) Number of Rows 2 Row Spacing - Mating 0.100° (2.54mm) Mounting Type Through Hole, Right Angle Termination Solder Fastening Type Push-Pull Contact Finish - Mating - Insulation Color Black Insulation Fielght 0.195° (4.95mm) Contact Finish Thickness - Mating - Insulation Fielght 0.195° (4.95mm)	Manufacturer	Samtec Inc.
Package-SeriesSSQConnector TypeReceptacleContact TypeForkedStyleBoard to Board or CableNumber of PositionsS6Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - MatingN100° (2.54mm)Mounting Type0.100° (2.54mm)Young TypeSolderTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Finish Thickness - Mating1.95° (4.95mm)Contact Funght - Post0.300° (7.62mm)Solder TorminationSolderStation Finish Thickness - Mating-Solder SensentSolderStation ColorBlackStation Finish Thickness - Mating.95° (2.05°CStation Finish Type.55° (2.05°C	Category	Connectors, Interconnects
SeriesSSQConnector TypeReceptacleContact TypeForkedStyleBoard to Board or CableNumber of Positions56Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeDiolon" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - Mating-Contact Finish - Mating-Insulation ColorBlackInsulation Height0.195" (4.95mm)Contact Length - Post0.300" (7.62mm)Operating Temperature-55°C ~ 105°C		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeForkedStyleBoard to Board or CableNumber of Positions56Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - Mating.Insulation ColorBlackInsulation Height0.195" (4.95mm)Contact Length - Post.300" (7.62mm)Operating Temperature-55°C ~ 105°C	Package	-
Contact TypeForkadStyleBoard to Board or CableNumber of Positions56Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - Mating.Insulation ColorBlackInsulation Height0.195" (4.95mm)Contact Length - Post.55°C ~ 105°C	Series	SSQ
StyleBoard to Board or CableNumber of Positions56Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.195" (4.95mm)Contact Length - Post0.300" (7.62mm)Operating Temperature-55°C ~ 105°C	Connector Type	Receptacle
Number of Positions 56 Number of Positions Loaded All Pitch - Mating 0.100" (2.54mm) Number of Rows 2 Row Spacing - Mating 0.100" (2.54mm) Mounting Type 0.100" (2.54mm) Termination 0.100" (2.54mm) Termination Solder Fastening Type Push-Pull Contact Finish - Mating Tin Contact Finish Thickness - Mating - Insulation Color Black Insulation Height 0.195" (4.95mm) Contact Length - Post 0.300" (7.62mm) Operating Temperature -55°C ~ 105°C	Contact Type	Forked
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - Mating-Insulation ColorBlackInsulation Height0.195" (4.95mm)Contact Length - Post0.300" (7.62mm)Operating Temperature-55°C ~ 105°C	Style	Board to Board or Cable
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - Mating-Routing ColorBlackInsulation Color0.195" (4.95mm)Contact Length - Post0.300" (7.62mm)Operating Temperature-55°C ~ 105°C	Number of Positions	56
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.195" (4.95mm)Contact Length - Post0.300" (7.62mm)Operating Temperature-55°C ~ 105°C	Number of Positions Loaded	All
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - Mating-Contact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.105" (4.95mm)Contact Length - Post0.300" (7.62mm)Operating Temperature-55°C ~ 105°C	Pitch - Mating	0.100" (2.54mm)
Mounting TypeThrough Hole, Right AngleTerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.195" (4.95mm)Contact Length - Post0.300" (7.62mm)Operating Temperature-55°C ~ 105°C	Number of Rows	2
TerminationSolderFastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.195" (4.95mm)Contact Length - Post0.300" (7.62mm)Operating Temperature-55°C ~ 105°C	Row Spacing - Mating	0.100" (2.54mm)
Fastening TypePush-PullContact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.195" (4.95mm)Contact Length - Post0.300" (7.62mm)Operating Temperature-55°C ~ 105°C	Mounting Type	Through Hole, Right Angle
Contact Finish - MatingTinContact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.195" (4.95mm)Contact Length - Post0.300" (7.62mm)Operating Temperature-55°C ~ 105°C	Termination	Solder
Contact Finish Thickness - Mating-Insulation ColorBlackInsulation Height0.195" (4.95mm)Contact Length - Post0.300" (7.62mm)Operating Temperature-55°C ~ 105°C	Fastening Type	Push-Pull
Insulation ColorBlackInsulation Height0.195" (4.95mm)Contact Length - Post0.300" (7.62mm)Operating Temperature-55°C ~ 105°C	Contact Finish - Mating	Tin
Insulation Height 0.195" (4.95mm) Contact Length - Post 0.300" (7.62mm) Operating Temperature -55°C ~ 105°C	Contact Finish Thickness - Mating	-
Contact Length - Post0.300" (7.62mm)Operating Temperature-55°C ~ 105°C	Insulation Color	Black
Operating Temperature $-55^{\circ}C \sim 105^{\circ}C$	Insulation Height	0.195" (4.95mm)
	Contact Length - Post	0.300" (7.62mm)
Material Elammability Rating UII 94 V-0	Operating Temperature	-55°C ~ 105°C
	Material Flammability Rating	UL94 V-0

Contact Finish - Post	Tin
Mated Stacking Heights	-
Ingress Protection	-
Features	-
	Report errors?

SSQ-128-03-T-D-RA Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SSQ-128-03-T-D-RA Payment Methods

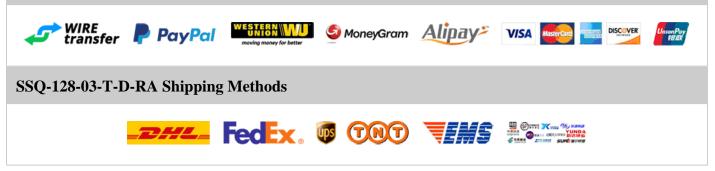

If you have any question about SSQ-128-03-T-D-RA, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com