

SSW-132-01-G-D

SSW-132-01-G-D Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SSW-132-01-G-D Specifications

Manufacturer Part NumberSSW-132-01-G-DManufacturerSamtee Inc.CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesSSWConnector TypeReceptacles, Semale SocketsContact TypeForkedStyleBoard to Board or CableNumber of Positions64Number of Positions Loaded1.00° (2.54mn)Number of Rows2Rew Spacing - Mating0.100° (2.54mn)Mounting TypePinch HadingPartinationSolderForniationSolderContact Finish - MatingGoldContact Finish - MatingGoldStation ColorBlackInsulation ColorBlackInsulation Finish - Mating0.1010 (3.54mn)Contact Finish - MatingGoldContact Finish - MatingGoldContact Finish - MatingGoldContact Finish - Mating0.1010 (3.54mn)Insulation ColorBlackInsulation Finish - MatingSolderContact Finish - Mating0.1010 (3.51mn)Contact Finish Finickness - Mating0.1021 (3.51mn)Contact Length - Post0.104° (2.65mn)Contact Length - Post0.104° (2.65mn)				
CategoryConnectors InterconnectsPackage-SeriesSWConnector TypeReceptacles. Female SocketsConnector TypeReceptacles.Connector TypeReceptacles.StyleSord to Board or CableNumber of Positions64Number of Positions Loaded100° (2.54mm)Number of Rows2Rowspacing - Mathing100° (2.54mm)Number of Rows0.10° (2.54mm)Number of Rows0.10° (2.54mm)Routing TypeSolderFerninationSolderForther Strikenses - MatingSolderContact Finish - MatingGoldContact Finish - MatingSolderInsulation ColorBackInsulation Finish - MatingSolderInsulation Finish - MatingSol	Manufacturer Part Number	SSW-132-01-G-D		
AckageRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesSSWConnector TypeReceptacleContact TypeForkedStyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows2Row Spacing - Mating0.100° (2.54mm)Mounting Type0.100° (2.54mm)YerninationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.335° (8.51mm)Contact Length - Post0.104° (2.65mm)	Manufacturer	Samtec Inc.		
Package-SeriesSSWConnector TypeReceptacleConnector TypeForkedContact TypeBoard to Board or CableStyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingOujm (0.51µm)Insulation ColorBlackInsulation Height0.335" (8.51nm)Contact Length - Post0.104" (2.65mm)	Category	Connectors, Interconnects		
SeriesSSWConnector TypeReceptacleContact TypeForkedStyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFastening TypeOlderFastening TypeOldContact Finish - MatingGoldContact Finish Thickness - MatingGoldInsulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector TypeReceptacleContact TypeForkedStyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleFastening TypeSolderContact Finish - MatingGoldContact Finish - MatingOujon (0.51µm)Insulation ColorBackInsulation Height0.33" (8.51µm)Contact Length - Post0.104" (2.65µm)	Package	-		
Contact TypeForkedStyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeOloo" (2.54mm)Fastening TypeSolderFastening TypeOloo" (2.54mm)Contact Finish - MatingGoldContact Finish - MatingOloo" (2.51µm)Insulation ColorBlackInsulation Height0.335" (8.51µm)Contact Length - Post0.104" (2.65mm)	Series	SSW		
StyleBoard to Board or CableNumber of Positions64Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)	Connector Type	Receptacle		
Number of Positions64Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingOldInsulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)	Contact Type	Forked		
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)	Style	Board to Board or Cable		
Pitch - Mating0.100" (2.54mm)Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting Type0.100" (2.54mm)TerminationThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJuin (0.51µm)Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)	Number of Positions	64		
Number of Rows2Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)	Number of Positions Loaded	All		
Row Spacing - Mating0.100" (2.54mm)Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)	Pitch - Mating	0.100" (2.54mm)		
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)	Number of Rows	2		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)	Row Spacing - Mating	0.100" (2.54mm)		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)	Mounting Type	Through Hole		
Contact Finish - MatingGoldContact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)	Termination	Solder		
Contact Finish Thickness - Mating20µin (0.51µm)Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)	Contact Finish - Mating	Gold		
Insulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)	Contact Finish Thickness - Mating	20μin (0.51μm)		
Contact Length - Post 0.104" (2.65mm)	Insulation Color	Black		
-	Insulation Height	0.335" (8.51mm)		
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Contact Length - Post	0.104" (2.65mm)		
	Operating Temperature	-55°C ~ 125°C		
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Gold	
Mated Stacking Heights	-	
Ingress Protection	-	
Features	-	
		Report errors?

SSW-132-01-G-D Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SSW-132-01-G-D Payment Methods

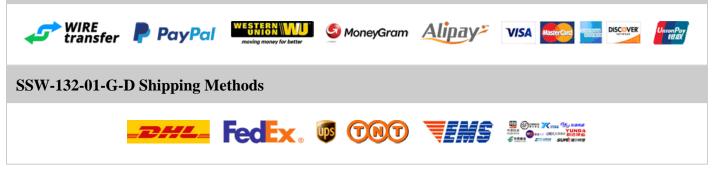

If you have any question about SSW-132-01-G-D, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com