

SSW-140-01-S-S

SSW-140-01-S-S Information



Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



SSW-140-01-S-S Specifications

Manufacturer Part NumberSSW-140-01-S-SManufacturerSamtee Inc.CategoryConnectors, InterconnectsPackage-SeriesSGW-140-01-S-S Headers, Receptacles, Female SocketsPackage-Connector TypeReceptacles, Teaders, Receptacles, Rece				
Category Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets Package - Series SSW Connector Type Receptacle Contact Type Receptacle Contact Type Porked Style Board to Board or Cable Number of Positions 40 Number of Positions Loaded All Number of Rows 1 Number of Rows 1 Number of Rows 1 Number of Rows Solder Termination Solder Solder Solder Station Fluckness - Mating Gold Contact Finish - Mating Jouin (0.76µm) Soltari Color Black Soltari Fluckness - Mating Solder Soltari Finish Thickness - Mating Jouin (0.76µm) Soltari Fluckness - Mating Soliari (0.81µm) Soltari Finish Thickness - Mating Jouin (0.76µm) Soltari Finish Thickness - Mating Jouin (0.76µm) Soltari Finish Thicknese - Mating Jouin (0.62µm)	Manufacturer Part Number	SSW-140-01-S-S		
Package-SeriesSSWConnector TypeReceptacleContact TypeForkedStyleBoard to Board or CableNumber of Positions40Number of Positions LoadedIPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - MatingSolderTerminationSolderFastening TypeOuts - DuillContact Finish - MatingGoldContact Finish - MatingGoldSolter Finish - MatingSolderSteining TypeBoard Or CableSolter Finish - MatingGoldContact Finish - MatingGoldContact Finish Thickness - MatingJuni (0.76µm)Sultation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)Operating Temperature-55°C ~ 125°C	Manufacturer	Samtec Inc.		
Package-SeriesSSWConnector TypeReceptacleContact TypeForkedStyleBoard to Board or CableNumber of Positions40Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleFreminationSolderFastening TypeGoldContact Finish - MatingGoldContact Finish Thickness - MatingJoin (0.76µm)Insulation ColorBlackInsulation Height0.335° (8.51µm)Contact Length - Post0.104° (2.65µm)Operating Temperature55°C ~ 125°C	Category	Connectors, Interconnects		
SeriesSSWConnector TypeReceptacleContact TypeForkedStyleBoard to Board or CableNumber of Positions40Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleForminationSolderContact Finish - MatingGoldContact Finish - MatingGoldStation ColorBiackInsulation ColorBiackInsulation Height0.335° (8.51mm)Contact Fungt-PostSiderStation Height0.104° (2.55mm)Contact Fungt-PostSiderStation HeightSiderStation HeightSider SittemStation HeightSider SittemContact Fungt-PostSitter SittemSitter Sitter SittemSitter SittemSitter Sitter Sitter SittemSitter SittemSitter Sitter Si		Rectangular Connectors - Headers, Receptacles, Female Sockets		
Connector Type Receptacle Contact Type Forked Style Board to Board or Cable Number of Positions 40 Number of Positions Loaded All Pitch - Mating 0.100° (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Younde Timish - Mating Solder Contact Finish - Mating Gold Contact Finish - Mating Gold Stateining Type Back Contact Finish - Mating Jupin (0.76µm) Solder Solder Stateining Type Back Contact Finish - Mating Solder Solator - Solator Solator - Solat	Package	-		
Contact TypeForkedStyleBoard to Board or CableNumber of Positions40Number of Positions LoadedAllPitch - Mating0.100° (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)Operating Temperature-55°C ~ 125°C	Series	SSW		
StyleBoard to Board or CableNumber of Positions40Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldInsulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post50°C ~ 125°C	Connector Type	Receptacle		
Number of Positions 40 Number of Positions Loaded All Pitch - Mating 0.100" (2.54mm) Number of Rows 1 Row Spacing - Mating - Mounting Type Through Hole Termination Solder Fastening Type Push-Pull Contact Finish - Mating Gold Contact Finish Thickness - Mating 30µin (0.76µm) Insulation Color Black Insulation Height 0.335" (8.51mm) Contact Length - Post 0.104" (2.65mm)	Contact Type	Forked		
Number of Positions LoadedAllPitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingJupin (0.76µm)Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)Operating Temperature-55°C ~ 125°C	Style	Board to Board or Cable		
Pitch - Mating0.100" (2.54mm)Number of Rows1Row Spacing - Mating-Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - MatingBlackInsulation Color0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)Operating Temperature-55°C ~ 125°C	Number of Positions	40		
Number of Rows1Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)Operating Temperature-55°C ~ 125°C	Number of Positions Loaded	All		
Row Spacing - Mating-Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating3µin (0.76µm)Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)Operating Temperature-55°C ~ 125°C	Pitch - Mating	0.100" (2.54mm)		
Mounting TypeThrough HoleTerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)Operating Temperature-55°C ~ 125°C	Number of Rows	1		
TerminationSolderFastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)Operating Temperature-55°C ~ 125°C	Row Spacing - Mating	-		
Fastening TypePush-PullContact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)Operating Temperature-55°C ~ 125°C	Mounting Type	Through Hole		
Contact Finish - MatingGoldContact Finish Thickness - Mating30µin (0.76µm)Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)Operating Temperature-55°C ~ 125°C	Termination	Solder		
Contact Finish Thickness - Mating 30µin (0.76µm) Insulation Color Black Insulation Height 0.335" (8.51mm) Contact Length - Post 0.104" (2.65mm) Operating Temperature -55°C ~ 125°C	Fastening Type	Push-Pull		
Insulation ColorBlackInsulation Height0.335" (8.51mm)Contact Length - Post0.104" (2.65mm)Operating Temperature-55°C ~ 125°C	Contact Finish - Mating	Gold		
Insulation Height 0.335" (8.51mm) Contact Length - Post 0.104" (2.65mm) Operating Temperature -55°C ~ 125°C	Contact Finish Thickness - Mating	30µin (0.76µm)		
Contact Length - Post0.104" (2.65mm)Operating Temperature-55°C ~ 125°C	Insulation Color	Black		
Operating Temperature $-55^{\circ}C \sim 125^{\circ}C$	Insulation Height	0.335" (8.51mm)		
	Contact Length - Post	0.104" (2.65mm)		
Material Flammability Rating UL94 V-0	Operating Temperature	-55°C ~ 125°C		
	Material Flammability Rating	UL94 V-0		

Contact Finish - Post	Tin		
Mated Stacking Heights	-		
Ingress Protection	-		
Features	-		
			Report errors?

SSW-140-01-S-S Guarantees



Quality Guarantees


We provide 90 days warranty. * If the items you received were not in perfect quality, we would be responsible for your refund or replacement, but the items must be returned in their original condition.



Service Guarantees

We guarantee 100% customer satisfaction. Our experienced sales team and tech support team back our services to satisfy all our customers.

SSW-140-01-S-S Payment Methods

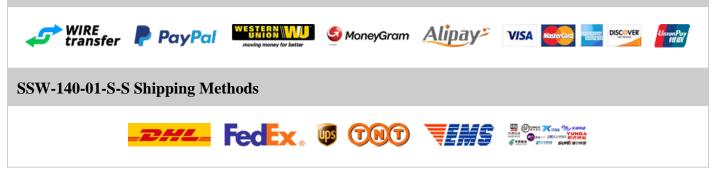

If you have any question about SSW-140-01-S-S, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com