

TPS-30L

TPS-30L Information



Part Number	TPS-30L	
Manufacturer	Eaton	
Category	Circuit Protection Electrical, Specialty Fuses	
Description	FUSE CRTRDGE 30A 170VDC RAD BEND	
Package	Radial Bend Cylinder	
	For the pricing/inventory/lead time, please contact us Website: https://www.heisener.com E-mail: salesdept@heisener.com	



Request a Quote

For Reference Only

Certified Quality


Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.



TPS-30L Specifications

ManufacturerEatonCategoryCircuit Protection Electrical, Specialty FusesPackageRadial Bend CylinderPackageTelpower? TPSFuse TypeCartridgeCurrent Rating30AVoltage Rating - AC-Voltage Rating - DC170VResponse Time-ApplicationsTelecomFuser Sy-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage100kAManufa TypeBolt MountPackage / CaseRadial Bend Cylinder			
CategoryCircuit ProtectionElectrical, Specialty FusesPackageRadial Bend CylinderSeriesTelpower? TPSFuse TypeCartridgeCurrent Rating30AVoltage Rating - AC-Voltage Rating - DC170VResponse Time-ApplicationsTelecomFeatures-Class-ApprovalsCE, UROperating Temperature100kABreaking Capacity @ Rated VoltageBolt MountPackage / CaseRadial Bend CylinderSize / Dimension0.563" Dia x 0.874" L (14.30mm x 22.20mm)	Manufacturer Part Number	TPS-30L	
Bit of the second sec	Manufacturer	Eaton	
PackageRadial Bend CylinderSeriesTelpower? TPSFuse TypeCartridgeCurrent Rating30AVoltage Rating - AC-Voltage Rating - DC170VResponse Time-ApplicationsTelecomFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeBolt MountPackage / CaseRadial Bend CylinderSize / Dimension0.563" Dia x 0.874" L (14.30mm x 22.20mm)	Category	Circuit Protection	
SeriesTelpower? TPSFuse TypeCartridgeCurrent Rating30AVoltage Rating - AC-Voltage Rating - DC170VResponse Time-ApplicationsTelecomFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated VoltageBolt MountMounting TypeBolt MountPackage / CaseScal' Dia x 0.874" L (14.30mm x 22.20mm)		Electrical, Specialty Fuses	
Fuse TypeCartridgeCurrent Rating30AVoltage Rating - AC-Voltage Rating - DC170VResponse Time-ApplicationsTelecomFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeBolt MountPackage / CaseRadial Bend CylinderSize / Dimension0.563" Dia x 0.874" L (14.30mm x 22.20mm)	Package	Radial Bend Cylinder	
Current Rating30ACurrent Rating - AC-Voltage Rating - DC170VResponse Time-ApplicationsTelecomFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeBolt MountPackage / CaseRadial Bend CylinderSize / Dimension0.563" Dia x 0.874" L (14.30mm x 22.20mm)	Series	Telpower? TPS	
Voltage Rating - AC-Voltage Rating - DC170VResponse Time-ApplicationsTelecomFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeBolt MountPackage / CaseRadial Bend CylinderSize / Dimension0.563" Dia x 0.874" L (14.30mm x 22.20mm)	Fuse Type	Cartridge	
Voltage Rating - DC170VResponse Time-ApplicationsTelecomFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeBolt MountPackage / CaseRadial Bend CylinderSize / Dimension0.563" Dia x 0.874" L (14.30mm x 22.20mm)	Current Rating	30A	
Response Time-ApplicationsTelecomFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeBolt MountPackage / CaseRadial Bend CylinderSize / Dimension0.563" Dia x 0.874" L (14.30mm x 22.20mm)	Voltage Rating - AC	-	
ApplicationsTelecomFeatures-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeBolt MountPackage / CaseRadial Bend CylinderSize / Dimension0.563" Dia x 0.874" L (14.30mm x 22.20mm)	Voltage Rating - DC	170V	
Features-Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeBolt MountPackage / CaseRadial Bend CylinderSize / Dimension0.563" Dia x 0.874" L (14.30mm x 22.20mm)	Response Time	-	
Class-ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeBolt MountPackage / CaseRadial Bend CylinderSize / Dimension0.563" Dia x 0.874" L (14.30mm x 22.20mm)	Applications	Telecom	
ApprovalsCE, UROperating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeBolt MountPackage / CaseRadial Bend CylinderSize / Dimension0.563" Dia x 0.874" L (14.30mm x 22.20mm)	Features	-	
Operating Temperature-Breaking Capacity @ Rated Voltage100kAMounting TypeBolt MountPackage / CaseRadial Bend CylinderSize / Dimension0.563" Dia x 0.874" L (14.30mm x 22.20mm)	Class	-	
Breaking Capacity @ Rated Voltage100kAMounting TypeBolt MountPackage / CaseRadial Bend CylinderSize / Dimension0.563" Dia x 0.874" L (14.30mm x 22.20mm)	Approvals	CE, UR	
Mounting TypeBolt MountPackage / CaseRadial Bend CylinderSize / Dimension0.563" Dia x 0.874" L (14.30mm x 22.20mm)	Operating Temperature	-	
Package / CaseRadial Bend CylinderSize / Dimension0.563" Dia x 0.874" L (14.30mm x 22.20mm)	Breaking Capacity @ Rated Voltage	100kA	
Size / Dimension 0.563" Dia x 0.874" L (14.30mm x 22.20mm)	Mounting Type	Bolt Mount	
	Package / Case	Radial Bend Cylinder	
Report errors?	Size / Dimension	0.563" Dia x 0.874" L (14.30mm x 22.20mm)	
A		1	Report errors?

TPS-30L Guarantees

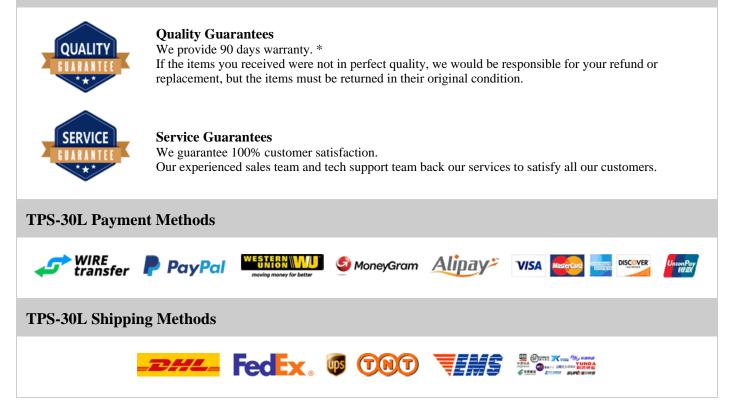

If you have any question about TPS-30L, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com