

TST36RB06Y

Quote

TST36RB06Y Information

	Dout Mouse hou	TETZEDDOCY	
Heisener.com	Part Number	TST36RB06Y	
	Manufacturer	ITT Cannon, LLC	
	Category	Connectors, Interconnects Rectangular Connectors - Headers, Receptacles, Female Sockets	
	Description	TRIDENT	- NS-1
	Package	-	
For Reference Only		For the pricing/inventory/lead time, please contact	
		us	
		Website: https://www.heisener.com	Request
		E-mail: salesdept@heisener.com	

Certified Quality

Heisener's commitment to quality has shaped our processes for sourcing, testing, shipping, and every step in between. This foundation underlies each component we sell.




TST36RB06Y Specifications

Manufacturer Part NumberTST3GRB06YManufacturerITT Cannon, LLCCategoryConnectors, InterconnectsPackage-SeriesTrident RectangularConnector TypeReceptacles, Female SocketsContact TypeReceptacleContact TypeBoard to Board or CableNumber of Positions36Number of Positions LoadedAllPitch - Mating0.200" (5.08mm)Number of Rows4Row Spacing - Mating0.200" (5.08mm)Mounting TypeThrough HoleContact Finish - MatingGoldaContact Finish - MatingSoleyContact Finish - MatingGoldaContact Finish - MatingGoldaContact Finish - MatingSoleyContact Finish - MatingGoldaContact Finish - MatingSoleyContact Finish - MatingGoldaContact Finish - MatingGoldaContact Finish - MatingSoleyContact Finish - MatingSoleyContact		
CategoryConnectors, InterconnectsRectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTriden RectangularConnector TypeReceptacleConnector TypeFemale SocketContact TypeBoard to Board or CableNumber of Positions36Number of Positions LoadedAllPich - Mating0.200° (5.08mm)Number of Rows4Row Spacing - Mating0.200° (5.08mm)Number of Positions0.200° (5.08mm)Number of Rows6.020° (5.08mm)Row Spacing - Mating0.200° (5.08mm)Mounting TypeIntrough HoleForninationSolderForninationGolderContact Finish - MatingGoldContact Finish - Mating-Insulation ColorBlack	Manufacturer Part Number	TST36RB06Y
Rectangular Connectors - Headers, Receptacles, Female SocketsPackage-SeriesTrident RectangularConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions36Number of Positions LoadedAllPitch - Mating0.200" (5.08mm)Number of Rows4Row Spacing - Mating0.200" (5.08mm)Mounting TypeThrough HoleTerminationSolderFastening TypeLatch HolderContact Finish - MatingGoldInsulation ColorBlack	Manufacturer	ITT Cannon, LLC
Package-SeriesTriden RectangularConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions36Number of Positions LoadedAllPitch - Mating0.200" (5.08mm)Number of Rows4Row Spacing - Mating0.200" (5.08mm)Mounting TypeThrough HoleTerminationSolderFastening TypeLatch HolderContact Finish - MatingGoldInsulation ColorBlack	Category	Connectors, Interconnects
SeriesTrident RectangularConnector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions36Number of Positions LoadedAllPitch - Mating0.200" (5.08mm)Number of Rows4Row Spacing - Mating0.200" (5.08mm)Mounting TypeThrough HoleTerminationSolderFastening TypeLatch HolderContact Finish - MatingGoldInsulation ColorBlack		Rectangular Connectors - Headers, Receptacles, Female Sockets
Connector TypeReceptacleContact TypeFemale SocketStyleBoard to Board or CableNumber of Positions36Number of Positions LoadedAllPitch - Mating0.200" (5.08mm)Number of Rows4Row Spacing - Mating0.200" (5.08mm)Mounting TypeThrough HoleFastening TypeLatch HolderContact Finish - MatingGoldInsulation ColorBlack	Package	-
Contact TypeFemale SocketStyleBoard to Board or CableNumber of Positions36Number of Positions LoadedAllPitch - Mating0.200° (5.08mm)Number of Rows4Row Spacing - Mating0.200° (5.08mm)Mounting TypeDifter of SolderFastening TypeSolderFastening TypeGoldContact Finish - MatingGoldInsulation ColorBlack	Series	Trident Rectangular
StyleBoard to Board or CableNumber of Positions36Number of Positions LoadedAllPitch - Mating0.200" (5.08mm)Number of Rows4Row Spacing - Mating0.200" (5.08mm)Mounting TypeThrough HoleTerminationSolderFastening TypeLatch HolderContact Finish - MatingGoldInsulation ColorBlack	Connector Type	Receptacle
Number of Positions36Number of Positions LoadedAllPitch - Mating0.200" (5.08mm)Number of Rows4Row Spacing - Mating0.200" (5.08mm)Mounting TypeD.200" (5.08mm)Mounting TypeThrough HoleTerminationSolderFastening TypeLatch HolderContact Finish - MatingGoldContact Finish Thickness - Mating-Insulation ColorBlack	Contact Type	Female Socket
Number of Positions LoadedAllPitch - Mating0.200" (5.08mm)Number of Rows4Row Spacing - Mating0.200" (5.08mm)Mounting Type0.200" (5.08mm)TerminationSolderFastening TypeLatch HolderContact Finish - MatingGoldContact Finish Thickness - Mating-Black	Style	Board to Board or Cable
Pitch - Mating0.200" (5.08mm)Number of Rows4Row Spacing - Mating0.200" (5.08mm)Mounting Type0.200" (5.08mm)TerminationSolderFastening TypeLatch HolderContact Finish - MatingGoldContact Finish Thickness - Mating-BackBack	Number of Positions	36
Number of Rows4Row Spacing - Mating0.200" (5.08mm)Mounting TypeThrough HoleTerminationSolderFastening TypeLatch HolderContact Finish - MatingGoldContact Finish Thickness - Mating-Insulation ColorBlack	Number of Positions Loaded	All
Row Spacing - Mating0.200" (5.08mm)Mounting TypeThrough HoleTerminationSolderFastening TypeLatch HolderContact Finish - MatingGoldContact Finish Thickness - Mating-BackBack	Pitch - Mating	0.200" (5.08mm)
Mounting TypeThrough HoleTerminationSolderFastening TypeLatch HolderContact Finish - MatingGoldContact Finish Thickness - Mating-Insulation ColorBlack	Number of Rows	4
TerminationSolderFastening TypeLatch HolderContact Finish - MatingGoldContact Finish Thickness - Mating-Insulation ColorBlack	Row Spacing - Mating	0.200" (5.08mm)
Fastening TypeLatch HolderContact Finish - MatingGoldContact Finish Thickness - Mating-Insulation ColorBlack	Mounting Type	Through Hole
Contact Finish - MatingGoldContact Finish Thickness - Mating-Insulation ColorBlack	Termination	Solder
Contact Finish Thickness - Mating-Insulation ColorBlack	Fastening Type	Latch Holder
Insulation Color Black	Contact Finish - Mating	Gold
	Contact Finish Thickness - Mating	-
Insulation Height 0 531" (13 50mm)	Insulation Color	Black
	Insulation Height	0.531" (13.50mm)
Contact Length - Post 0.224" (5.70mm)	Contact Length - Post	0.224" (5.70mm)
Operating Temperature $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$	Operating Temperature	-40°C ~ 105°C
Material Flammability Rating UL94 V-0	Material Flammability Rating	UL94 V-0

Contact Finish - Post	-
Mated Stacking Heights	-
Ingress Protection	-
Features	Mounting Flange

Report errors?

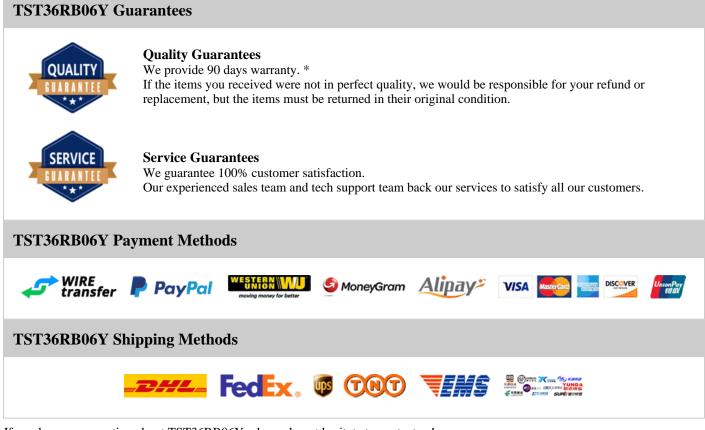

If you have any question about TST36RB06Y, please do not hesitate to contact us! Website: https://www.heisener.com E-mail: salesdept@heisener.com